


NEVE UP



**The smart choice.  
It's now connected**



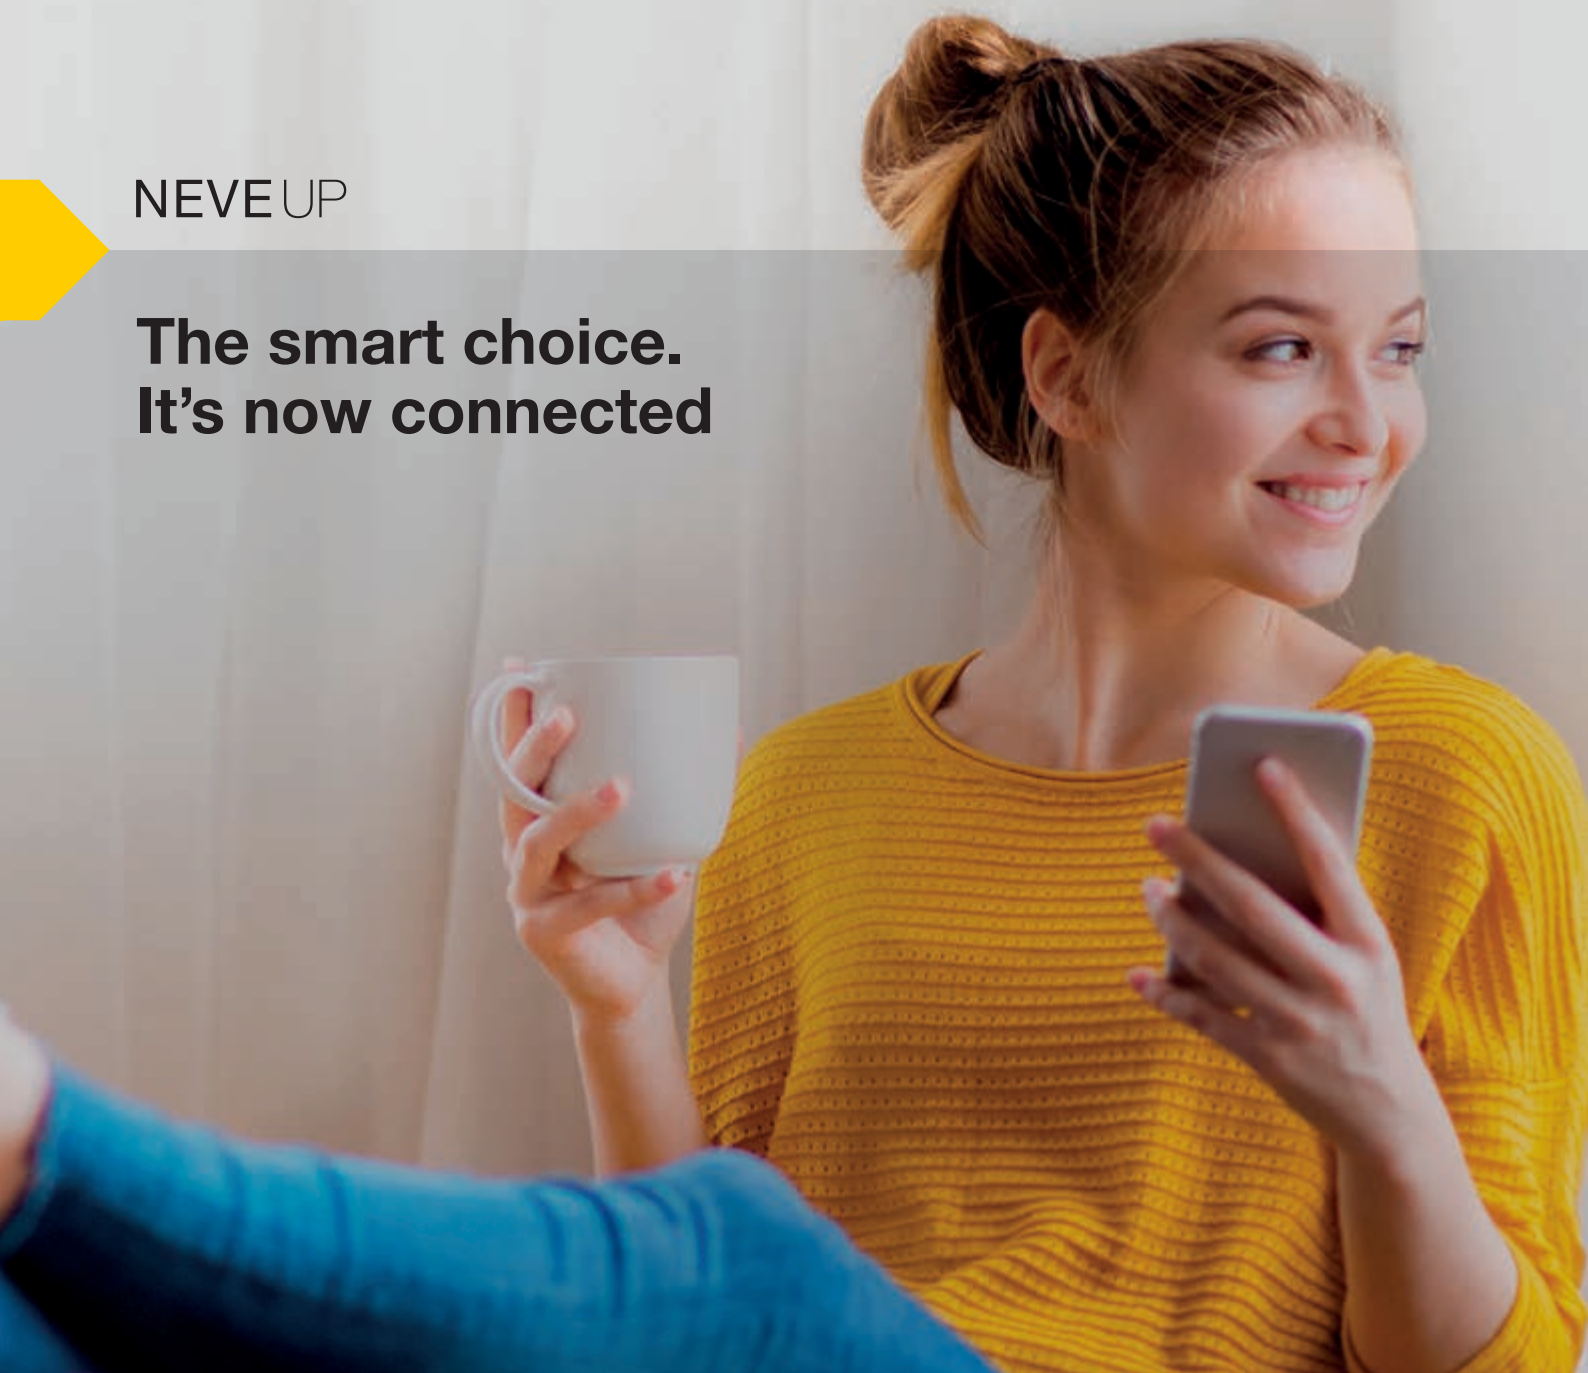

It's a  
smart  
choice!

## NEVE UP.

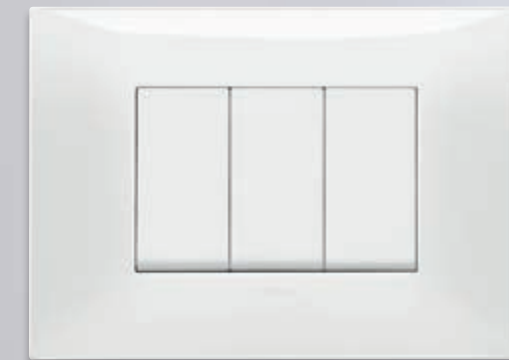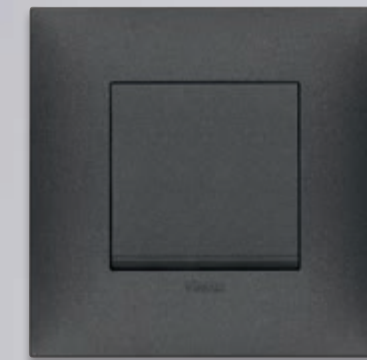A good choice for  
any residential, hospitality  
and office spaces.




- > Simple lines, modern shape
- > **Smart and connected.** Ideal for renovations, upgrades and new buildings 
- > New and stronger supports for easy, flexible and safe installation 
- > Versatile and modular range for convenient solutions
- > Wide range of applications with **IP55** and **IP40 protective boxes** 
- > New opportunities. It's up to you





**NEVE UP. A new recognizable design**  
to guarantee full functionality, quality, security  
and easy installation.

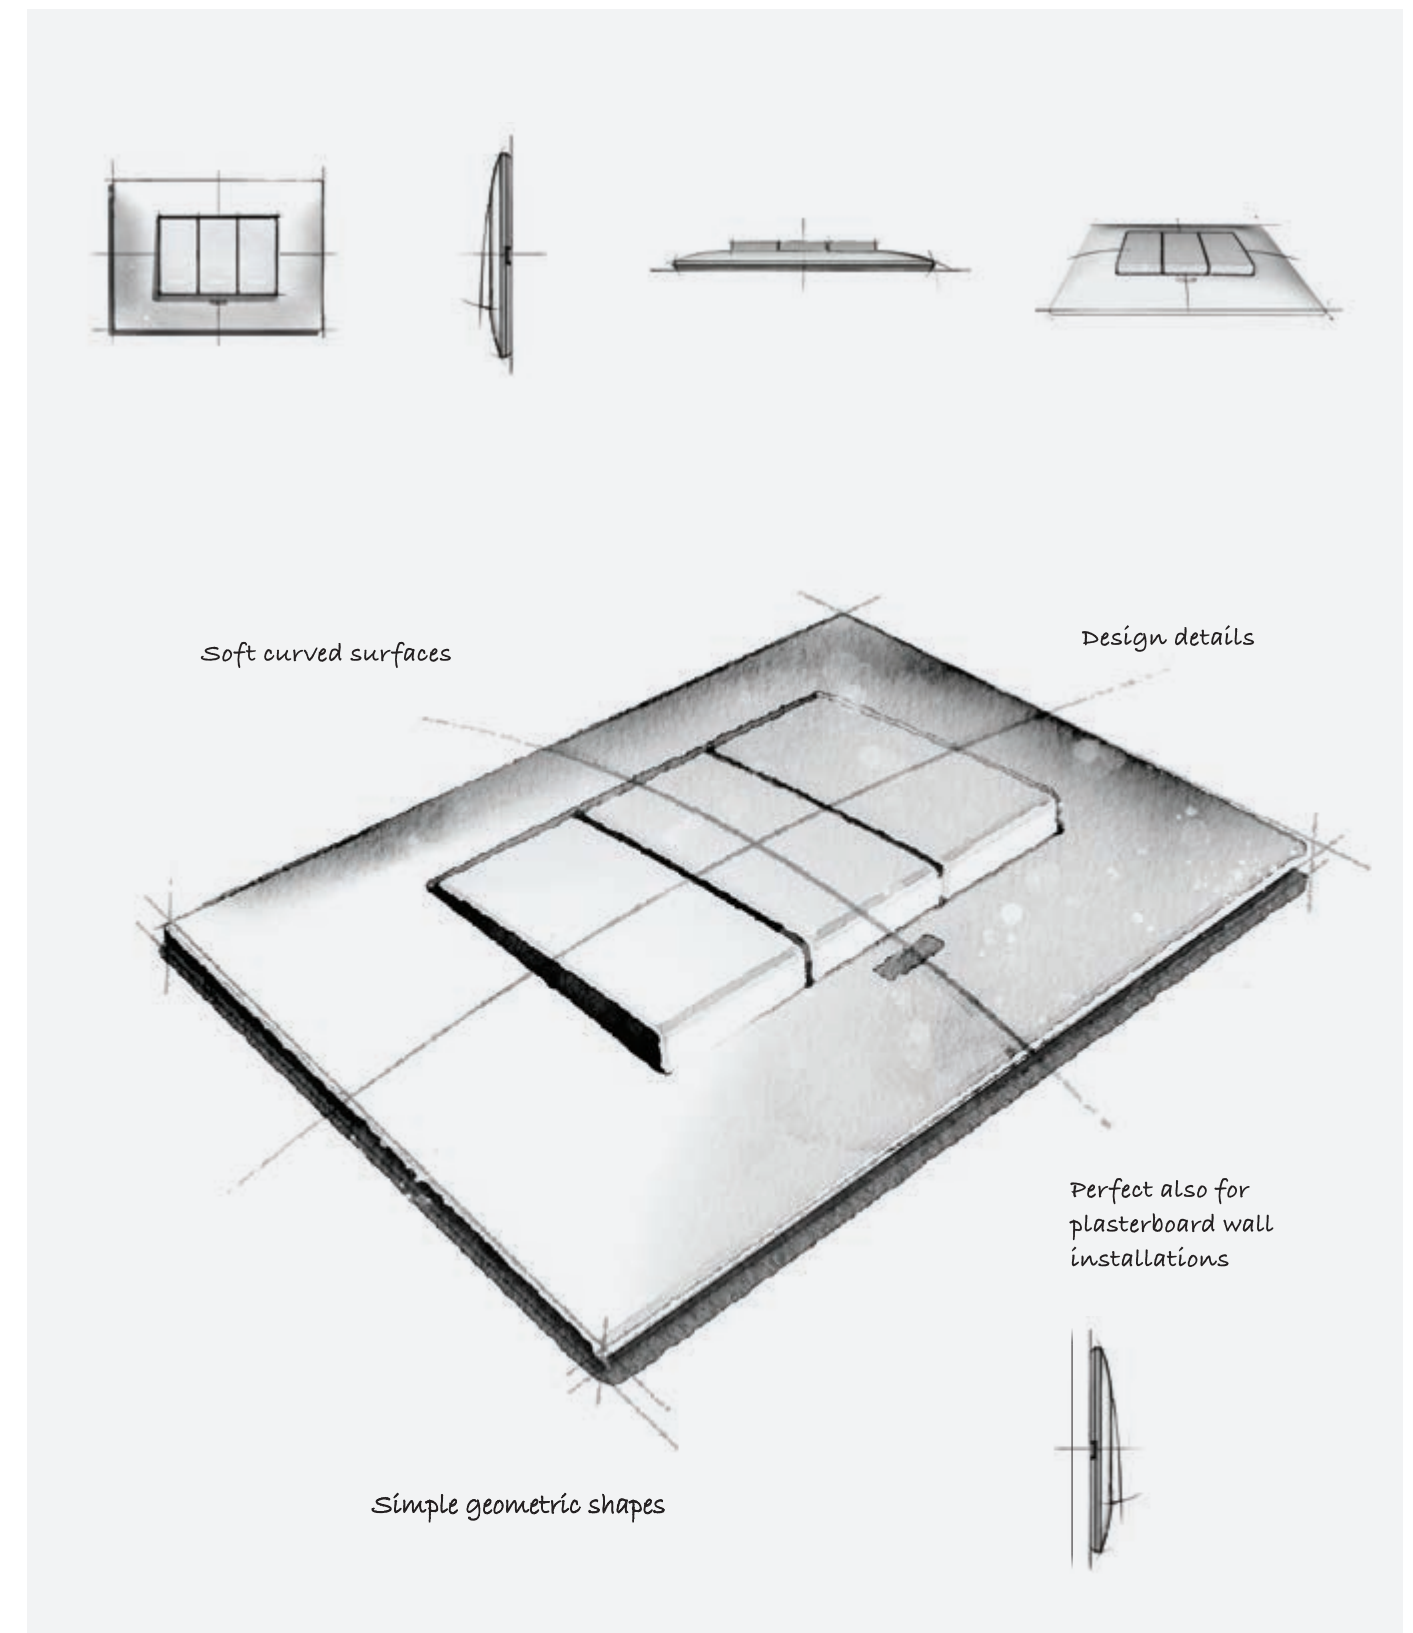



NEVE UP

## NEVE UP. Black or white?



**We have designed a comprehensive system** that allows you, with the flexibility of its modular system, to have more opportunities to create or upgrade your existing electrical installation.

Choose the  
Total Look style.



**Total Look - White**  
**Total Look - Carbon matt**

A unique style, total look in black or white, or carbon matt, all perfectly coordinated. Same colour for cover plates and switches.





**NEVE UP** is bright white  
but not just white!

NEVE UP has **many finishes**: from **glossy** basics to **matt** and **metal**. **12 finishes** to combine with the white and carbon matt devices.

Glossy technopolymer

White - Total Look

Ivory

Slate grey

Black

Matt painted technopolymer

Matt white

Matt dove grey

Matt clay

Carbon matt - Total Look

Metal metallic painted technopolymer

Matt silver



Matt nickel

Matt titanium



Matt copper





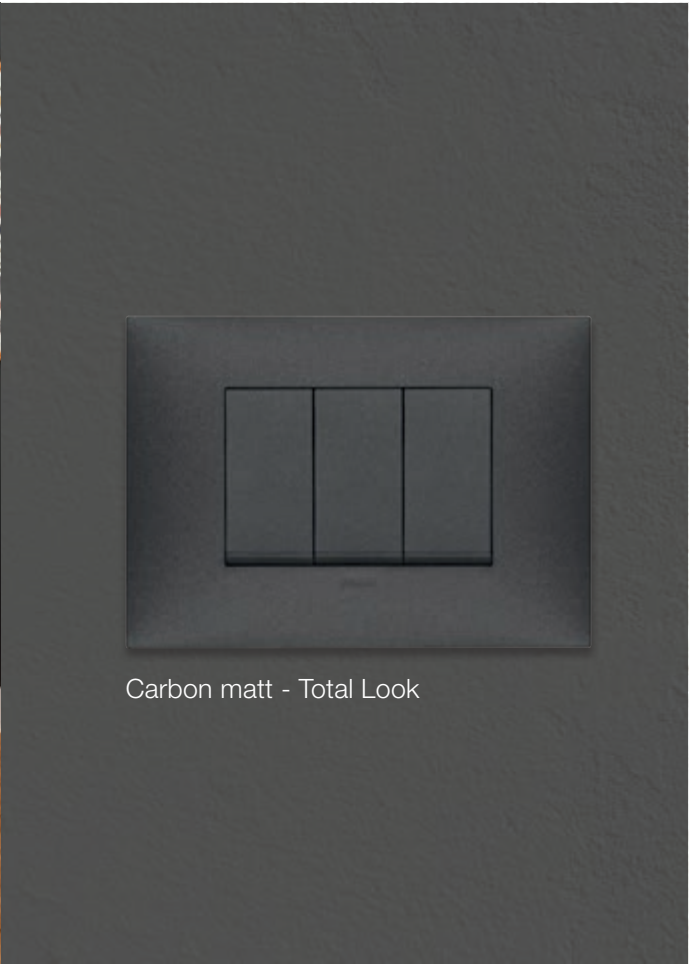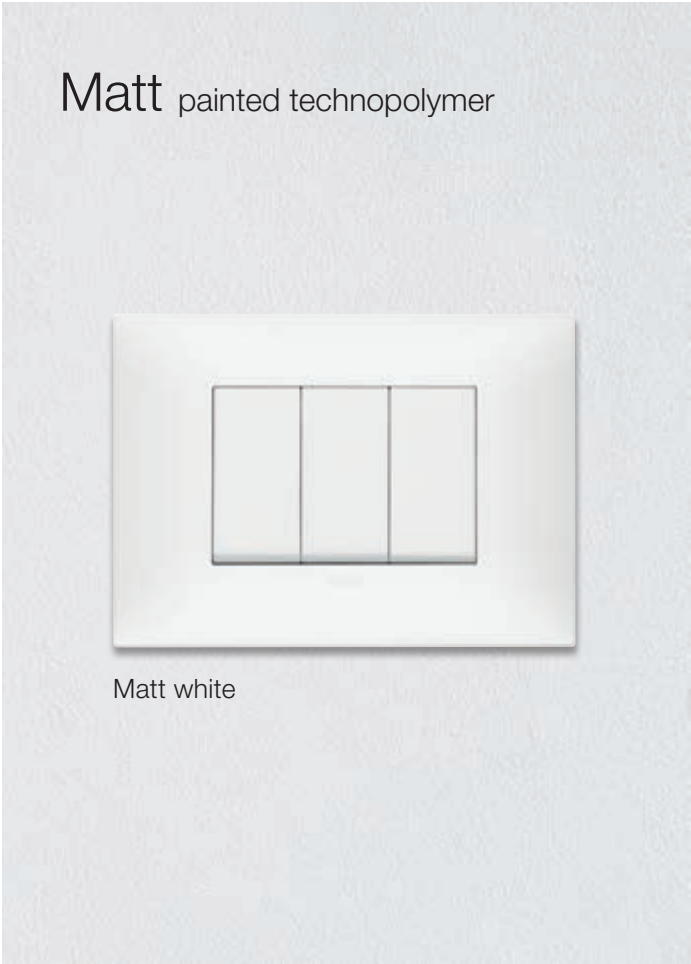



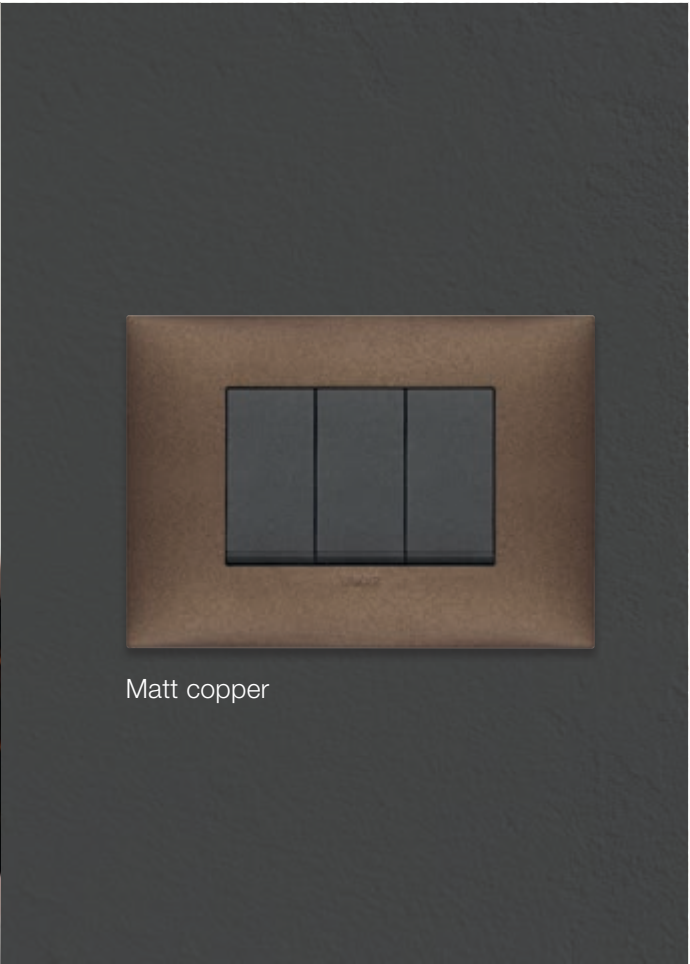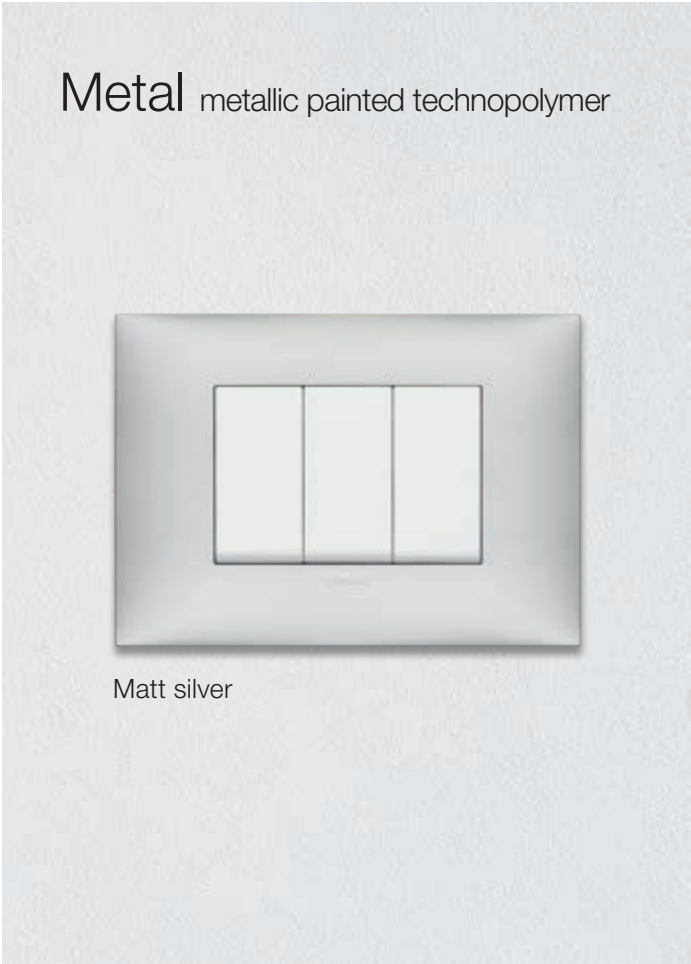






# NEVE UP. View Wireless smart home: make **your system** connected.

The View Wireless system makes it possible **to manage the temperature, lighting in various rooms, roller shutters or motorised blinds and to control accesses**, and it does so in a simpler and safe way.

It can also be used to **monitor energy consumption, manage loads and set scenarios** with the utmost simplicity using **connected controls**, via **the View App** or directly **by voice**.

View Wireless is **ideal for refurbishments** or to **boost the functions of an existing system**. It is also a **useful support means** for the elderly and people with restricted mobility, who can manage their home automations with a simple click or by voice.

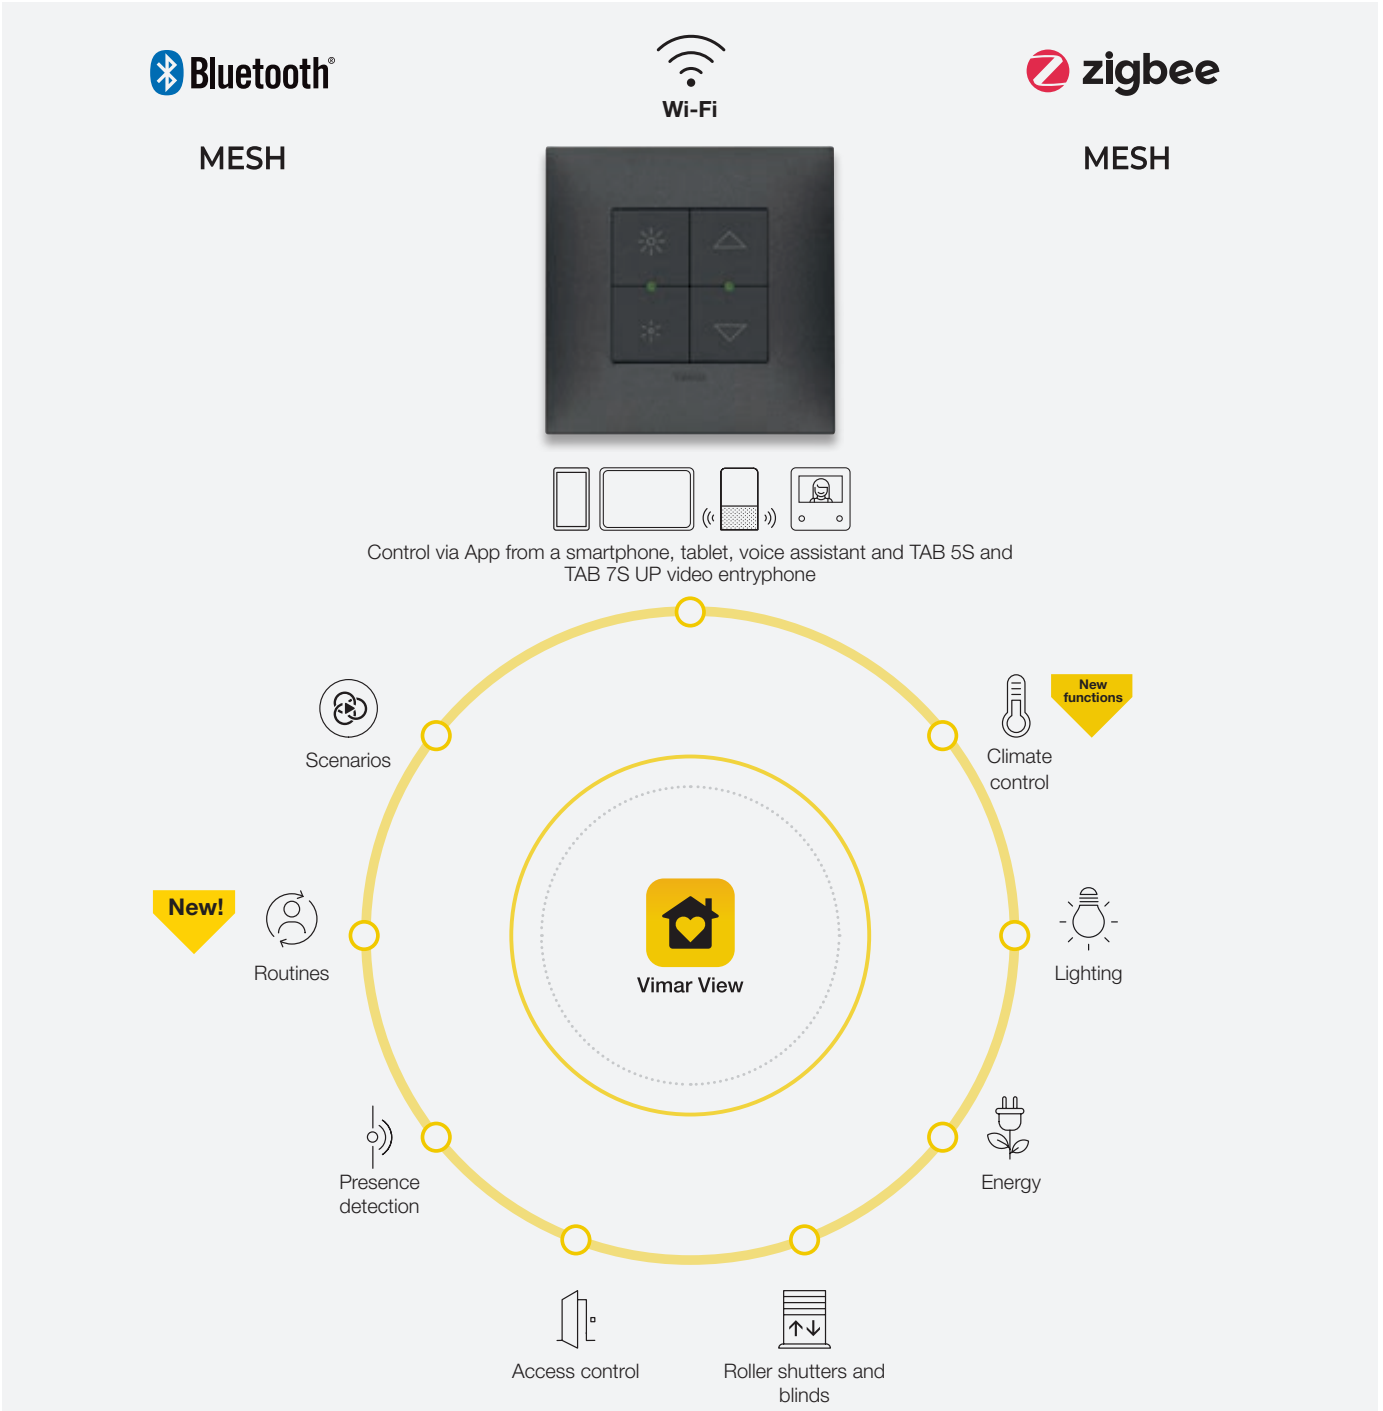


# NEVE UP. It's now connected.

## Easier and more functional.

Compared to a traditional system, the connected system makes it possible to have more functions **at hand**, or **vocally controllable**. A connected home thus guarantees **greater comfort, more efficiency** and **security** both when you are inside the environments as well as when you are out of doors, enhancing the value of the property and **improving life for its inhabitants**


### NEW FUNCTIONS FOR EVEN MORE COMPREHENSIVE CLIMATE CONTROL.

A thermostatic head is ideal for transforming heating systems with radiators into smart systems. It is designed to be installed as a replacement of conventional valves and allows you to modulate the hot water flow of an individual radiator based on the setpoint, which can be adjusted either locally on the head or remotely via a thermostat or using the Vimar View App.




### THE CONVENIENCE OF CONTROL VIA APP.

To control the status of lights, the position of curtains and motorised roller shutters, as well as temperature, accesses and energy loads, wherever you may be. Controlling your home with your voice makes technology accessible to everyone, including the elderly or the disabled.

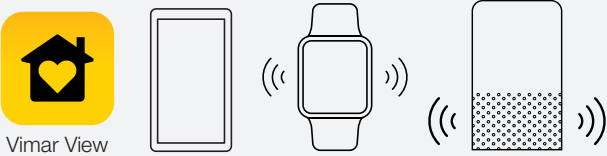


### THE RELIABILITY OF A PHYSICAL DEVICE COMBINED WITH THE FREEDOM OF A WIRELESS ONE.

Pressing a 1-way switch expands your freedom thanks to the battery-free and wireless digital controls, which can be positioned and inserted in any environment and surface according to personal preference.

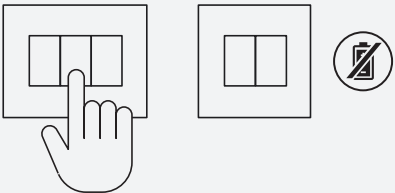


### THE PERFECT SCENARIOS, WITH JUST ONE TOUCH.

The scenarios can be recalled through various devices: physical switch, via the View App and also via the Tab 5S Up and Tab 7S Up video entryphones.

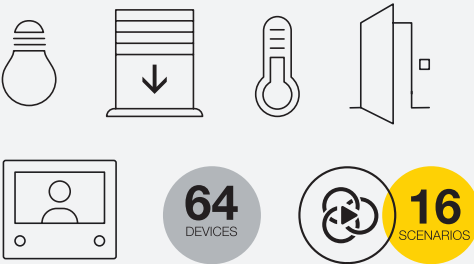

### TEMPERATURE CONTROL, COMFORT AND ENERGY SAVING.

Smart thermostats to manage the heating and air conditioning for the maximum comfort of the entire home but also to avoid energy waste. The range of intelligent thermostats is compatible with any 2- or 4-tube HVAC system.






# NEVE UP. It's now connected.

## Smarter and easier control.

It's versatile to update, extend or replace the wiring system over time into a connected system, suitable for any architectural context. View Wireless is the ideal solution when **renovating** an area of the home or an entire dwelling, store, restaurant, office and in those situations where **masonry work** and repainting tasks **need to be kept to a minimum**.

### SMART SYSTEM FOR ACCESS CONTROL.

Ideal for small and medium-sized facilities such as small hotels or B&Bs, it offers guests the best in terms of comfort and safety, guaranteeing the manager high management performance and energy efficiency. With the new View Key App, the smartphone can become a key ring to access restricted areas.

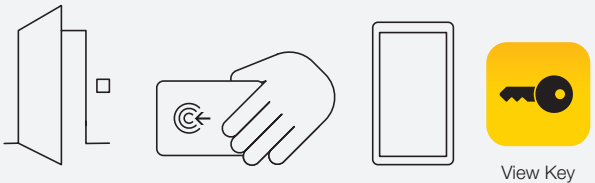


### MONITORING CONSUMPTION TO PREVENT POWER OUTAGES.

Checking the electricity consumption of your entire home or of individual appliances from your smartphone, monitoring the production of the photovoltaic system. It's easy to control the single load thanks to the smart actuator for measuring the instant power and load cut-off threshold.



### ALWAYS THE RIGHT SETTING LIGHTING TO AVOID ENERGY WASTAGE.

Thanks to the connected dimmers, installed at home, in the office or a hotel, you can manage your lighting in a smarter way: you obtain the appropriate degree of lighting depending on the circumstances, avoid energy wastage and make lighting management of all settings simpler and more convenient, while being aware of correct energy usage.



### EASIER TO MANAGE ACCOMMODATION FACILITY FOR THE GUESTS IN HOTELS AND OFFICES.

Thanks to the mounting sensor with Ultra Wide Band radar technology, it's possible to measure micro-movements of the body with the utmost precision to detect the presence of a person in a room and match scenarios: turn on the light or activate the temperature control.




### ASSISTED LIVING.

The ceiling radar sensor is able to measure an accidental fall within the detection range and send a notification alert to the smartphone of a person capable of providing assistance or activate a scenario.



## Dual intelligence, dual technology.

### INSTALLATION Bluetooth®

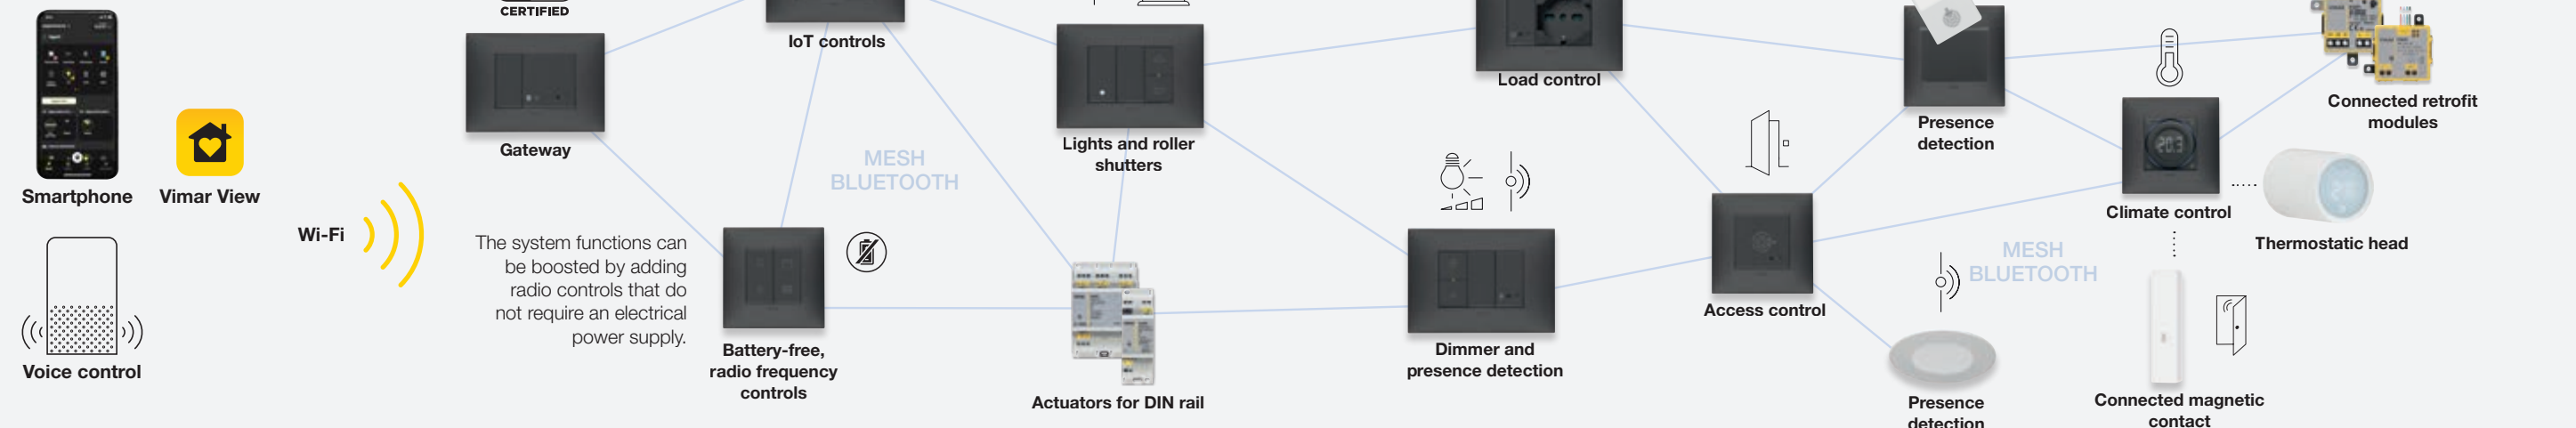

Works with  
**Apple HomeKit**

Hey Google

Works with  
**IFTTT**


**So thanks to the Wi-Fi gateway, the Bluetooth® Mesh network and the Vimar View App, you can therefore:**

- remote control lights, roller shutters, energy consumption, temperature and accesses, and expand the system even with battery-free controls, which can be positioned freely throughout your home;

- control a socket outlet and measure the consumption of the connected load, receiving a notification if the threshold is exceeded;

- create scenarios and routines;
- control the system using voice controls (Amazon Alexa, Amazon or Google Assistant and Siri).

### INSTALLATION zigbee

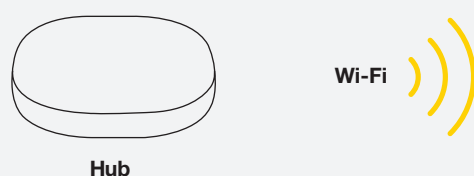

Works with  
**Samsung SmartThings**

**The View Wireless configuration App can be used to:**

- change the protocol in favour of Zigbee, enabling the direct integration of devices with the Zigbee hub

- manage a smart basic ecosystem to control lights, roller shutters, temperature and energy management.




NEVE UP. New, extensive, versatile and multistandard range.

We have redesigned NEVE UP to accommodate the various requirements in different countries: an extensive and versatile range of devices in **all international standards**, available for both Italian/US and French/German standards.


MODULAR & MULTI-MODULAR SOLUTIONS  
(Italian/US standard)

Thanks to the modularity of the devices:  
for cover plates with 1, 2, 3 and up to 7 modules.

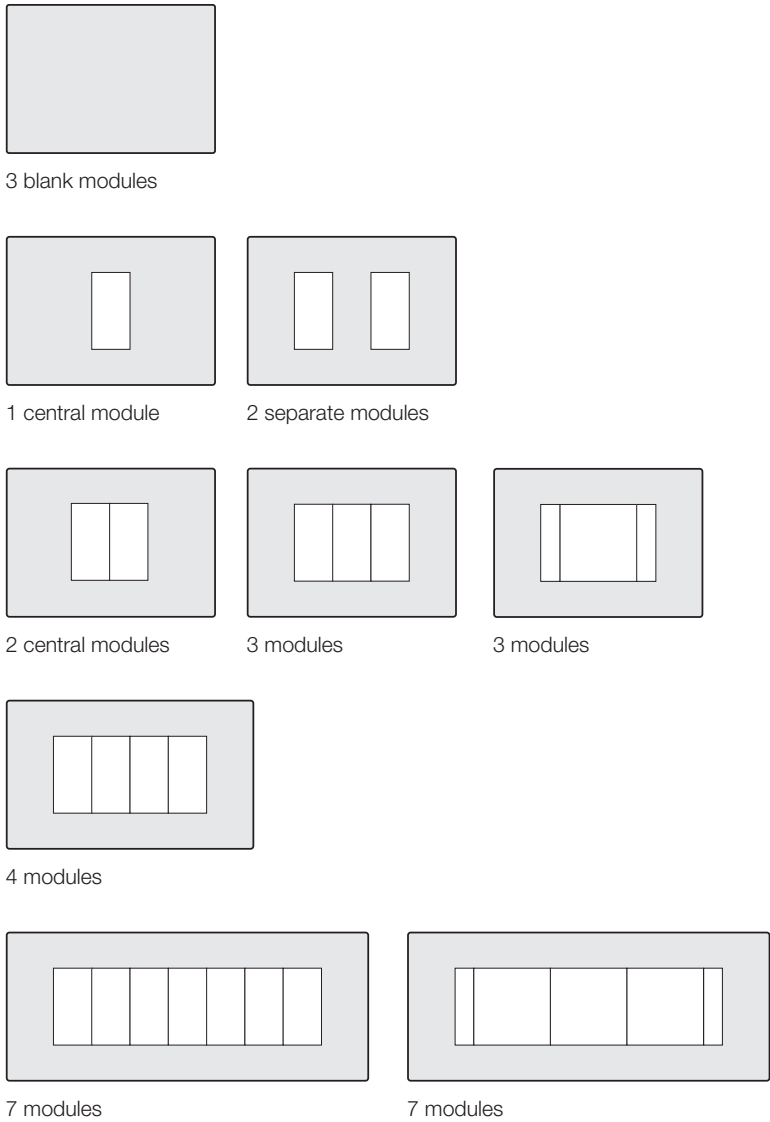

MULTIGANG SOLUTIONS  
(French/German standard)

Multigang cover plates are available for the French-German standard up to four gangs, to cover any modularity requirement.

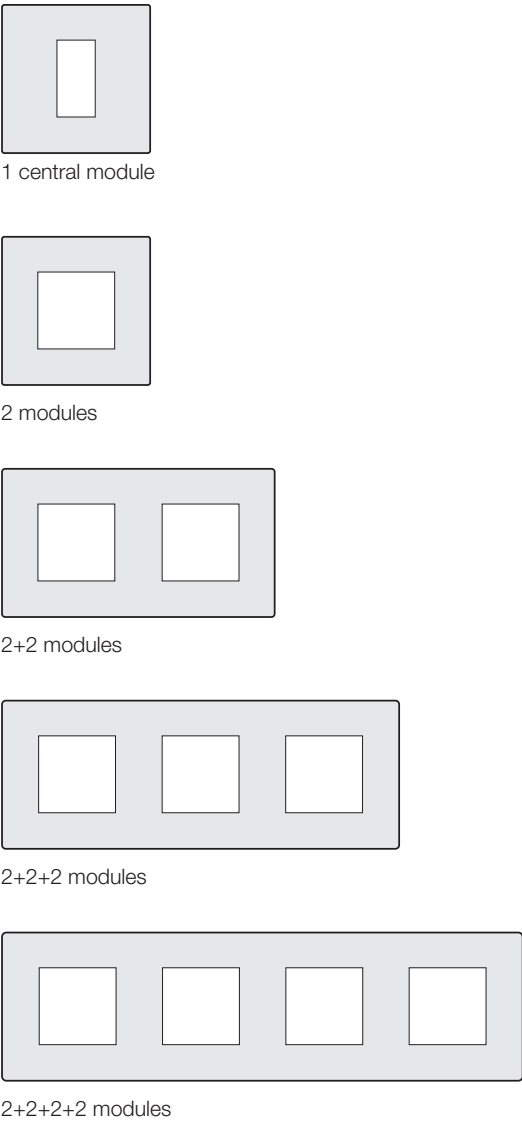

NEVE UP. New support frames.  
Installation gets easier and easier



New supports with a wider contact surface for more stable plate and device installation.

**STRONG**

With reinforced stainless steel screw housings

**SIMPLE**

Devices can be removed from the front

**VERSATILE**

Two different installation solutions using the half blank module

**SAFE**

Fitted with a retractable claw mechanism that doesn't scratch the fingers

NEVE UP. Easy and convenient stand-alone solutions **for the home and office.**

**STAND ALONE THERMOSTAT.**  
Dial operated thermostat, a sleek design in a super-easy-to-use thermostat. A dial to adjust the temperature, 4 preset buttons for ON/OFF selection, °C/°F setting, summer/winter mode selection and display brightness adjustment.



**USB SOCKET OUTLETS.**  
The type A USB charger has now been supplemented with the type A+C and C+C one, the new technological standard used to power and charge latest-generation devices. Ideal in hotel rooms and offices.



**ALWAYS THE RIGHT LIGHTING TO AVOID ENERGY WASTAGE.**  
Thanks to the connected dimmers, installed at home, in office or hotel, you manage your lighting in a smarter way: you obtain the appropriate degree of lighting depending on the circumstances, avoid energy wastage and make lighting management of all settings simpler and more convenient, being aware of correct energy usage.



**EMERGENCY LAMP.**  
The emergency lamp comes on in the event of a power outage to guide you safely in the dark.



**INFRARED 1-WAY SWITCH.**  
Without touching the switch, the infrared motion sensor turns the lights on and off only at night when someone passes by. Ideal for optimising electricity consumption levels and to avoid contact with the lighting device.





NEVE UP. Easy and convenient stand-alone solutions **for hospitality.**


THE BEST TEMPERATURE EVERYWHERE.

The optimum climate control by means the programming of the 7 days per week temperature, it is very easy and the clear display helps you to change the setting at any time and even from smartphone and tablet.



SMART SYSTEM FOR ACCESS CONTROL.

Ideal for small and medium-sized facilities such as small hotels or B&Bs, it offers guests the best in terms of comfort and safety, guaranteeing the manager high management performance and energy efficiency. With the new View Key App the smartphone can become a key ring to access restricted areas.

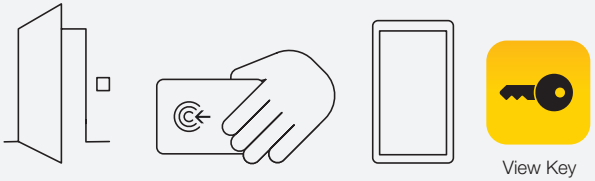

SHAVER SOCKET OUTLET AND CORD-OPERATED PUSH BUTTON.

For use in B&Bs and small hotels, the shaver socket outlet has a 20 VA isolating transformer with a power supply of 230 V and 120 V. There is also a cord-operated push button for installation in the bathroom for the safety of guests.



SPECIAL PUSH BUTTONS.

The Do Not Disturb and Please Clean push buttons facilitate communication between guests and service staff of the hotel, for enhanced guest comfort and quiet.



A FULL RANGE OF DATA AND POWER SOCKET OUTLETS.

Wide range of power socket outlets, from German to French standard, from Italian to American ones. Data, USB and TV-Radio-SAT socket outlets all guarantee fast and safe connection to a high quality standard.





## NEVE UP. New watertight boxes.

Protected from dust and humidity.

IP55

IP40

The new enclosures extend their field of action to environments where IP40 and IP55 degrees of protection are required: warehouses, basements and boiler rooms, construction sites, terraces, gardens and sports facilities. Wall mounted for 3 and 4 modules with transparent anti-UV membrane. For wall installation with IP55 protection against dust and water splashes. **Suitable for use in different contexts** thanks to the **glossy white and black finishes** with a central part made of a soft membrane for activating the 1-way switches without opening the door of the enclosure.





NEVE UP. Protection first and foremost.  
Co-ordinated, versatile and hard-wearing range.

- **Easy installation** of devices thanks to the **160° opening of the door**.
- Easy use thanks to the **system that blocks the door open at 120°**.
- **Easy access** to the devices thanks to the **large opening** and **accessible door release**.

Soft membrane for operating the switch without opening the door of the enclosure

Easy opening thanks to large door release

160°

120°

Opening of door up to **160°**

Possibility of **blocking** the door at **120°**

IP55 surface mounting covers  
Glossy black

IP55 surface mounting covers  
white

IP55

2 modules

3 modules

4 modules

Range	Models / Colours	Modularity	Specifications
IP55		 2M 3M 4M	<ul style="list-style-type: none"><li>• 160° door opening</li><li>• 120° door lock</li><li>• Installation/removal of devices from the front (insertion of screwdriver from rear)</li></ul>
IP55		 2M 3M 4M	<ul style="list-style-type: none"><li>• 160° door opening</li><li>• 120° door lock</li><li>• Installation/removal of devices from the front (insertion of screwdriver from rear)</li><li>• Pre-drill walls</li><li>• 1 hole already present + cable gland</li></ul>
IP40		 2M 3M 4M	<ul style="list-style-type: none"><li>• Installation/removal of devices from the front (insertion of screwdriver from rear)</li><li>• Pre-drill walls</li><li>• 1 hole already present + cable gland</li></ul>

# NEVE UP.

Opportunities for you

We are a team of professionals who provide expert support and customized global solutions for automating, connecting and monitoring the entire building while assuring totally matching styling of all visible devices.



**vimar.com** - our on-line service platform, available 24/7. Vimar's know-how at your fingertips.

**Navigate the on-line catalogue**, a detailed database of all our codes with technical drawings, instruction sheets, and product photos.

Go to the **download section** and choose your language:

- **Dedicated catalogues and brochures** of our product range, systems and solutions.
- **Video** tutorial section, also available on You Tube channel.

From the homepage go to the **News** to stay up-to-date and to **References** to see our latest **Projects**.



# We design with a sustainable approach.

Our commitment to the future

## The intangible value of research and innovation

We develop our products by applying an integrated approach; we effectively combine the cross-functional skills necessary to tackle technological and market challenges to create innovative and high-quality products. The constant commitment to innovation and research has resulted in over 200 patents filed. Some of these patents have contributed to changing electrical and safety regulations at the Italian and international levels.



## SICURY patent

A VIMAR idea that revolutionised the safety of electrical systems in 1968. The patent consists of a shutter that allows the protection of the live parts of the socket outlets. An innovation that we decided to license free of charge to all operators in the sector.



## Eco-packaging

The cardboard cases and containers for the products and the cardboard boxes for transport are made from recycled material, printed with water-based ink and use exclusively ecological glues. We use paper with the FSC mark which certifies the origin of responsibly managed forests, as well as allowing its traceability. We have reduced the weight of the packaging and discarded the mixed ones to facilitate sorting.





# Catalogue section

<b>Control devices</b>	44
<b>Power and signal socket outlets</b>	48
<b>Signalling</b>	51
<b>Climate control</b>	54
<b>Hotel solutions</b>	55
<b>View Wireless Smart home</b>	56
<b>Surface mounting enclosures and covers</b>	62
<b>Range of cover plates</b>	64
<b>Installation types</b>	68


# NEVE UP Free to change.

Flexible modular system installations.

Thanks to the many mounting frames available, ranging from 1 up to a maximum of 7 or 2+2+2+2 modules, devices with 1, 2, 3 modules, an extensive range of solutions can be found for all installation needs. The lighting switch can be completed with the cover plate in the colour and material of your choice.



2 modules

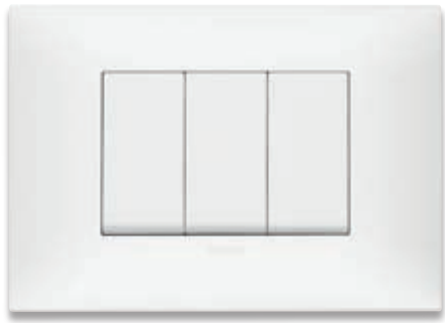


3 modules

**Customization and backlighting.**  
Backlit and customized devices are available both in white and carbon matt colours, to easily locate the switch and immediately know its function.



**Modular devices.**  
Combinations with 1, 2 and 3 module devices on 3 module mounting frames.

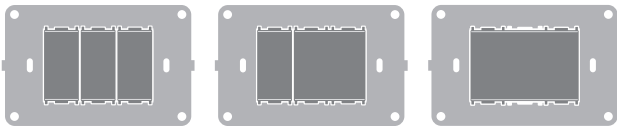


3 x 1

1 x 1 and 1 x 2

1 x 3


COVER PLATES + INTERCHANGEABLE DEVICES + MOUNTING FRAME

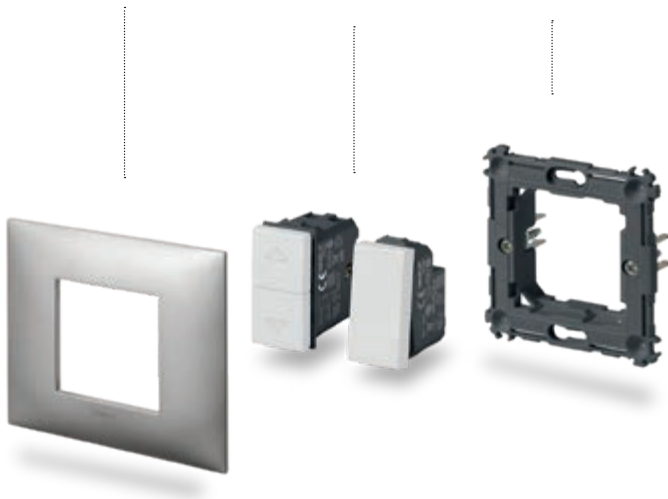

**Add and change functions over time, depending on your specific living needs.**




2+2 modules

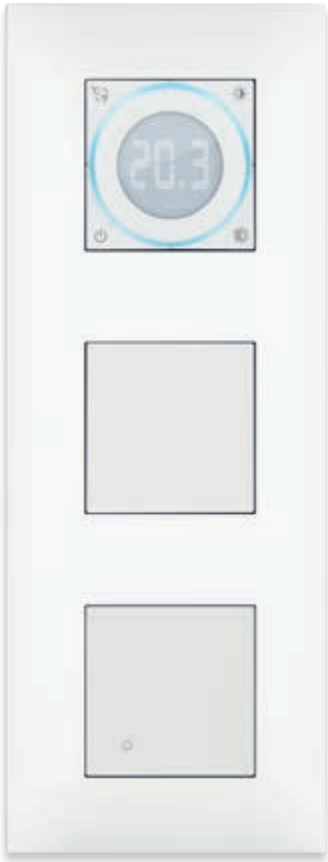


2+2+2 modules, vertical use

2+2+2 modules, horizontal use

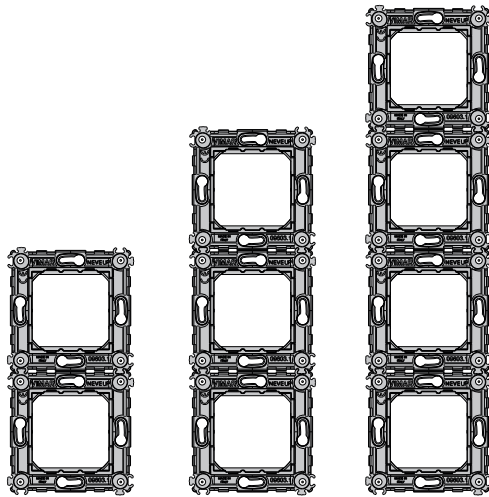

90°  
Multigang switches can be used horizontally or vertically depending on the specific needs of the setting.

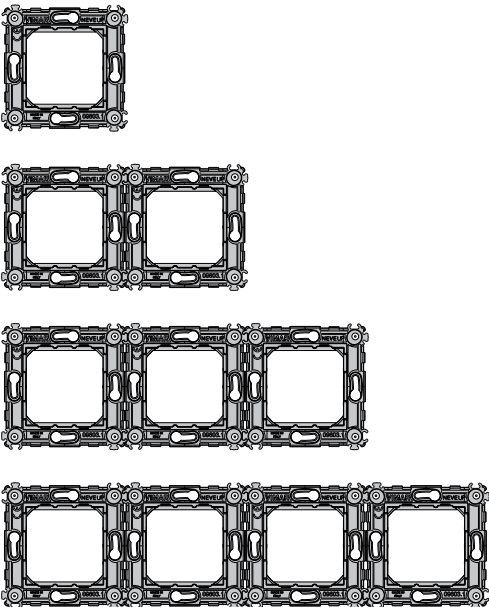



## NEVE UP is quality for quick and easy installation. We take care of every detail

### Your installation is easy to fit.

Installation is made easier thanks to the mounting frame with interlocking teeth that provide strong and reliable fixing for each single device and allows perfect alignment between devices to create a tidy and delightful stylistic effect. The devices are fixed front-on to the mounting frame, allowing work on the installation at any time without having to remove the mounting frame from the box.



### Improved electrical load transmission.


The use of noble metals such as silver for the terminal contacts makes the conduction of the electrical load easier, thereby lowering the operating temperature of the contacts making the device last longer.

### Screw terminals.

The metal plate in the terminals is curved: a Vimar refinement allowing different cross section wires to be held in place when clamped even at the same time. Secure fastening is assured for both signal circuit cables with cross-section 0.5-2.5 mm<sup>2</sup> and power circuit cables with cross-section 1.5-2.5 mm<sup>2</sup>.

### It's easy and flexible to upgrade over time

- Front clamping system for an easy mechanism installation when the support frame is already installed on the wall
- Specially designed terminal blocks prevent the mechanism from being subjected to strain when the screw is overloosened, allowing a power drill to be used for tightening and loosening the screws without damaging the mechanism

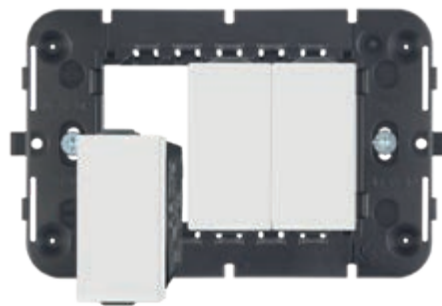

### Perfect alignment of buttons on the mounting frame.

The stiffness of the mounting frame along with the small production tolerances provide the required dimensional accuracy to guarantee perfect aligned rocker switches. The special structure also makes it possible to compensate for the thickness of the mounting box for plasterboard, guaranteeing the perfect fit of the cover plate with the wall.

## Perfect styling result, even on plasterboard walls

### NEVE UP is the ideal on plasterboard.


The special structure of the mounting frame affords an attractive flush-fit effect, where the cover plate blends in seamlessly with the wall. In installations on plasterboard walls, it also covers the protrusion of the mounting box perfectly.









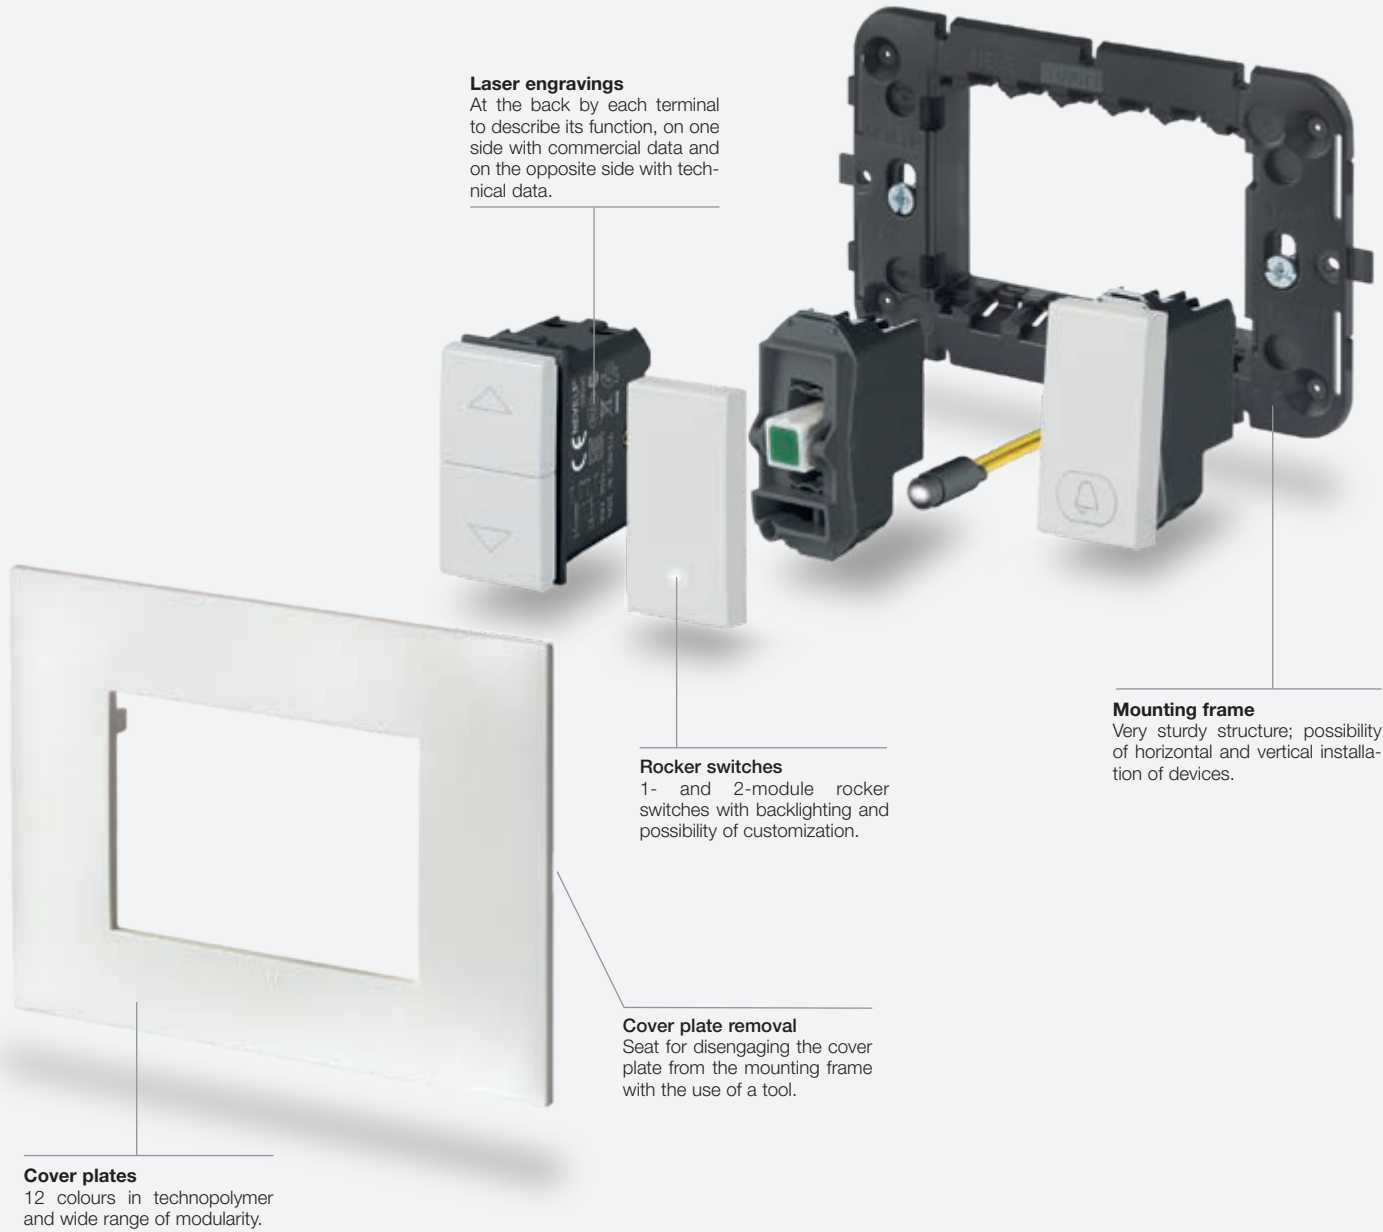
































### No play, perfect aesthetics.

The cover plate is capable on engulfing the box that protrudes from the wall, leaving no space between the cover plate and the wall itself, for uncompromised styling.

Mounting features  
Italian and American standard




Due to the graphic layout, the product photos are not represented with equivalent proportions.














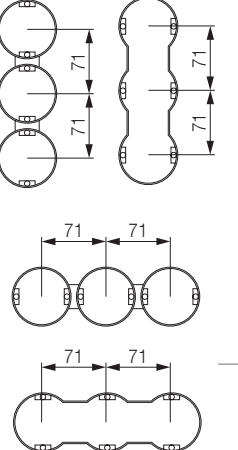
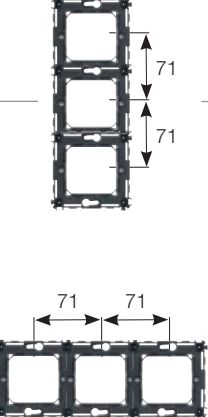


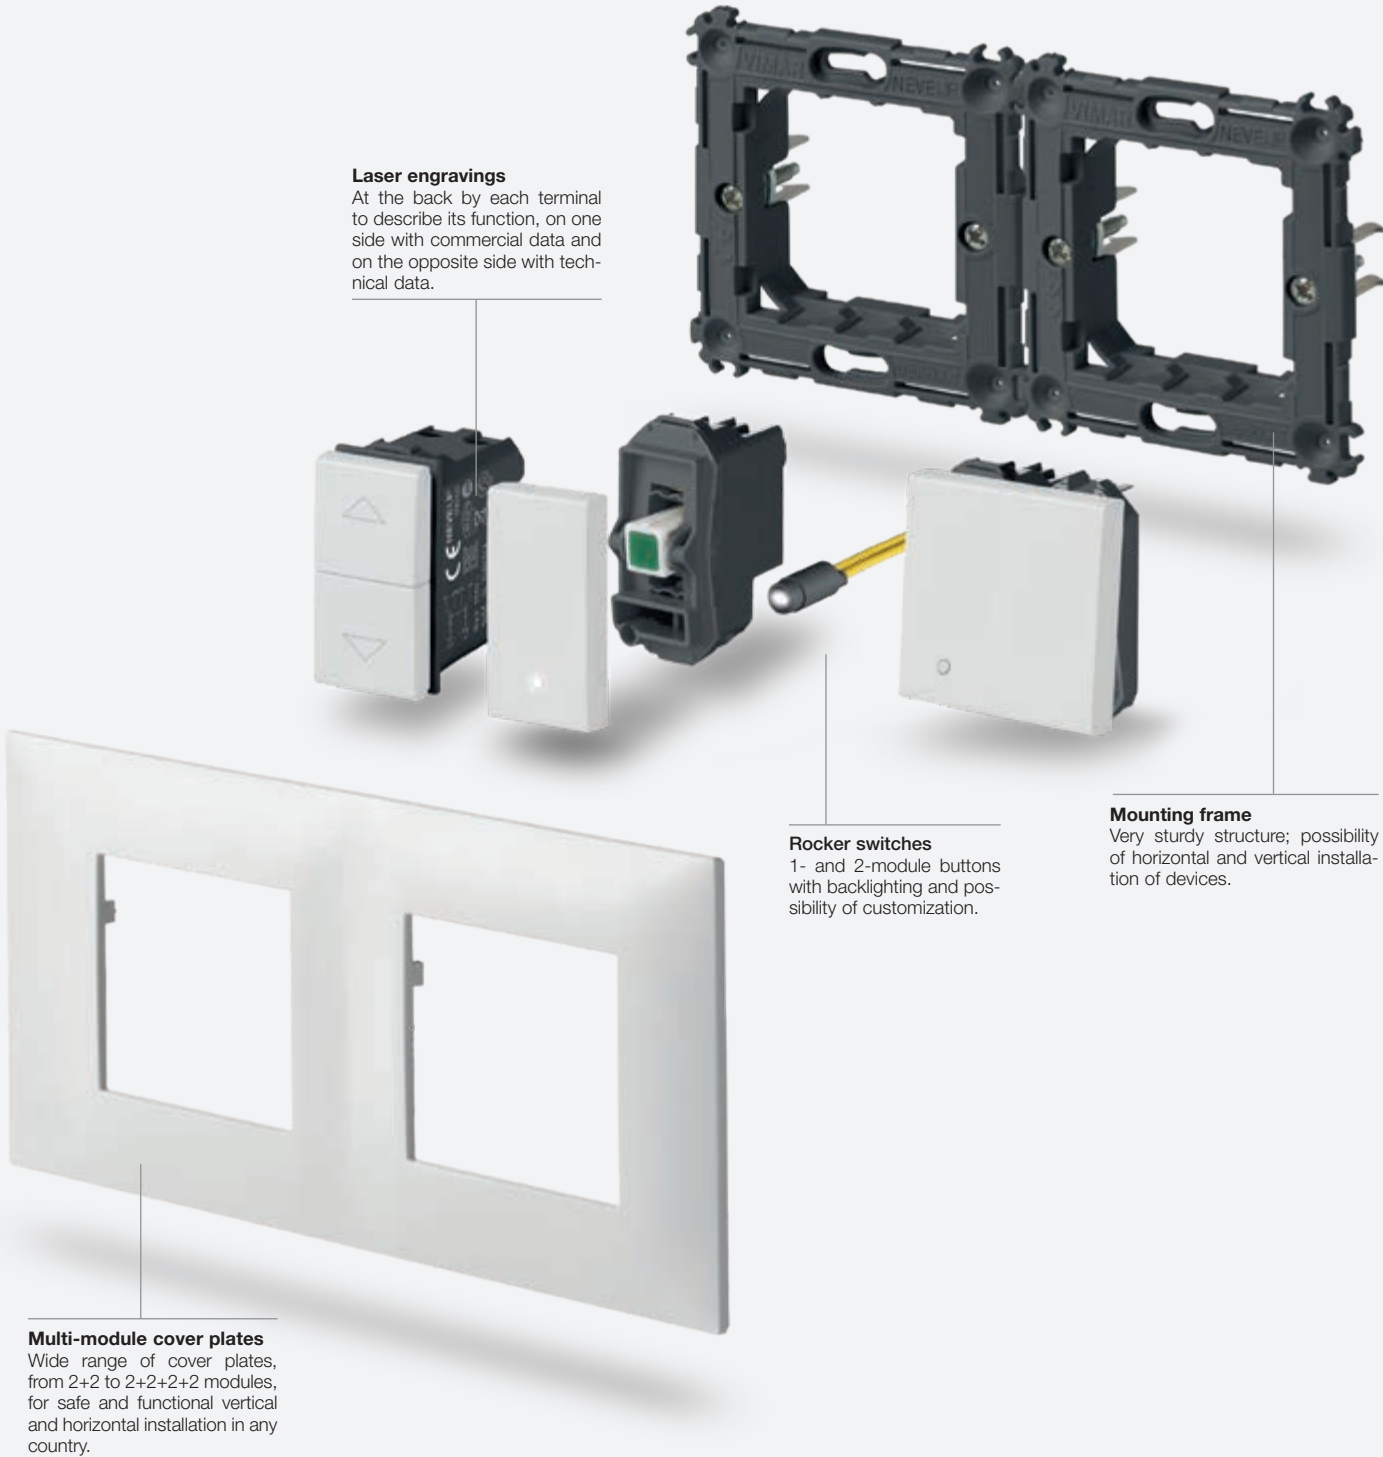


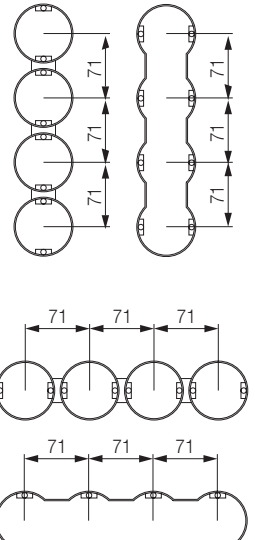
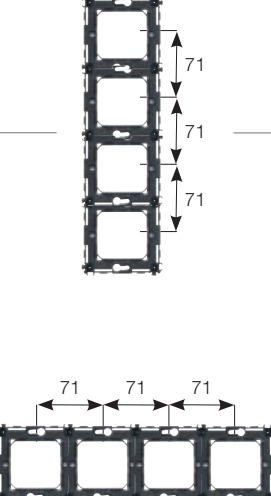


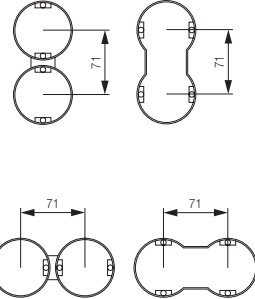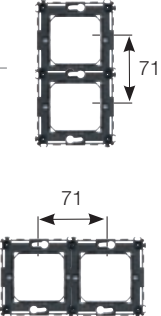

Composition	Boxes	Frames	Devices	Cover plates
<div> 1-central module, round box</div> <div> 2 modules, round box</div>	<div> Flush mounting</div>	<div> With/without screws or with claws</div>	<div> 1 module</div> <div> 1 x 2 modules</div> <div> 2 x 1 module</div>	<div> 1-central module*</div> <div> 2 modules*</div>
<div> 2-central modules, for round or 3-module box</div>	<div> Flush mounting</div> <div> Flush mounting</div>	<div> With screws</div> <div> With screws</div>	<div> 2 modules</div> <div> 2 x 1 module</div>	<div> 2-central modules*, vertical</div> <div> 2-central modules*, horizontal</div>
<div> From 1-central to 2-separate modules, for 3-module box</div> <div> From 3 to 7 modules</div>	<div> Flush mounting</div>	<div> With screws</div> <div> With screws</div> <div> With screws</div>	<div> 1 module</div> <div> 2 x 1 module</div> <div> 1 and 2 modules</div> <div> 3 x 1 module</div> <div> 3 modules</div> <div> 2 module + 2 half blank module</div>	<div> 1-central module*</div> <div> 2-separate modules*</div> <div> From 3 to 7 modules*</div> <div> Blank module*</div>
Installation of Plana devices				
<div> 3 modules with Plana devices</div>	<div> Flush mounting</div>	<div> Mounting frame for Plana devices, with screws</div>	<div> 3 x 1 module, Plana devices</div>	<div> Neve Up cover plate, 3 modules*</div>

\* For other combinations, see the installation types from page 66

























Mounting features  
German and French standard




Composition	Box	Frame	Device	Cover plate
 2 modules, ø 60 and 65 mm mounting box			 1-gang switch, 2 modules	 2 modules*
 2+2 modules, 71 mm distance between centres			 2 x 2 modules vertical  2 x 2 modules horizontal	 vertical  horizontal
 2+2+2 modules, 71 mm distance between centres			 3 x 2 modules vertical  3 x 2 modules horizontal	 vertical  horizontal
 2+2+2+2 modules, 71 mm distance between centres			 4 x 2 modules vertical  4 x 2 modules horizontal	 vertical  horizontal


\* For other combinations, see the installation types from page 68

White				Carbon Matt			
Blank modules and cable outlets							
							
<b>09040</b> Half blank module. Depth: 8 mm	<b>09041</b> Blank module. Depth: 9 mm	<b>09042</b> 2 blank module. Depth: 9 mm	<b>09044</b> Cable outlet. Depth: 11,1 mm	<b>09040.CM</b> Half blank module. Depth: 8 mm	<b>09041.CM</b> Blank module. Depth: 9 mm	<b>09042.CM</b> 2 blank module. Depth: 9 mm	<b>09044.CM</b> Cable outlet. Depth: 11,1 mm
1P 1-way switches 250 V~							
							
<b>09001</b> 16 AX. Depth: 23,1 mm	<b>09001.2</b> 16 AX, - 2 modules. Depth: 23,1 mm			<b>09001.CM</b> 16 AX. Depth: 23,1 mm	<b>09001.2.CM</b> 16 AX, - 2 modules. Depth: 23,1 mm		
2P 1-way switches 250 V~ (lightable°)							
							
<b>09015</b> 16 AX. Depth: 32,7 mm	<b>09016</b> 20 AX. Depth: 25,4 mm	<b>09016.G</b> 20 AX. Depth: 25,4 mm	<b>09016.2.G</b> 20 AX, - 2 modules. Depth: 25,4 mm	<b>09015.CM</b> 16 AX. Depth: 32,7 mm	<b>09016.CM</b> 20 AX. Depth: 25,4 mm	<b>09016.G.CM</b> 20 AX. Depth: 25,4 mm	<b>09016.2.G.CM</b> 20 AX, - 2 modules. Depth: 25,4 mm
							
<b>09020</b> 32 A, - 2 modules. Depth: 30,5 mm				<b>09020.CM</b> 32 A, - 2 modules. Depth: 30,5 mm			


Connected actuators - backside installation



03981  
Control device with NO 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, remote control, 1 input for wired control to recall a scenario, *Bluetooth® wireless technology* 5.0 for View Wireless mesh system and Zigbee 3.0







VIEW  
IoT smart life

















Bluetooth®











zigbee

1P 2-way switches 250 V~							
							
09005 16 AX. Depth: 23,1 mm	09005.2 16 AX, - 2 modules. Depth: 23,1 mm			09005.CM 16 AX. Depth: 23,1 mm	09005.2.CM 16 AX, - 2 modules. Depth: 23,1 mm		

White		Carbon Matt	
1P reversing switches 250 V~			
			
<b>09013</b> 16 AX. Depth: 26,7 mm	<b>09013.2</b> 16 AX, - 2 modules. Depth: 26,7 mm	<b>09013.CM</b> 16 AX. Depth: 26,7 mm	<b>09013.2.CM</b> 16 AX, - 2 modules. Depth: 26,7 mm
1P NO push buttons 250 V~			
			
<b>09008</b> 10 A. Depth: 23,1 mm	<b>09008.2</b> 10 A - 2 modules. Depth: 23,1 mm	<b>09008.CM</b> 10 A. Depth: 23,1 mm	<b>09008.2.CM</b> 10 A - 2 modules. Depth: 23,1 mm
Quid - Magnetic relay modules for lighting - backside installation			
			
<b>03991</b> ON/OFF sequence pulse relay module, 1 input for NO push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output	<b>03992</b> ON/OFF sequence pulse relay module, 1 input for NO push button, 1 input for reset push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output, luminous signalling of load status	<b>03993</b> ON/OFF sequence pulse relay module, 1 input for NO push button, 2 NO 10 A 220-240 V~ 50/60 Hz sequence relay outputs	
			
<b>03994</b> Quid magnetic relay module with sequential ON/OFF pulses, 1 input for NO push button on phase (L) or on neutral (N), 1 NO 10 AX 220-240 V~ 50/60 Hz relay output, flush mounting (retrofit, shunting or under blank module)	<b>▲ 01490</b> Quid magnetic relay module with sequential ON/OFF pulses, 1 input for NO push button, 1 input for NO reset push button, 1 input for NO set push button, 1x10 A 220-240 V~ 50/60 Hz volt-free output, installation on DIN rail (60715 TH35), occupies 1 module size 17.5 mm	<b>▲ 03998</b> Quid galvanic dividing module, 1 input for NO reset push button from system A (Slave), 1 input for NO reset push button from system B (master), 1 input for system A (slave) neutral, 1 input for system B (master) phase, installation in junction boxes or connector block boxes	

Backlit mechanisms° (to be combined with white or carbon matt rockers)			
			
09001.0.250¹ 1P 16 AX 250 V~ 1-way switch. Depth: 23,1 mm	09005.0.250¹ 1P 16 AX 250 V~ 2-way switch. Depth: 23,1 mm	09008.0.12¹ 1P NO 10 A 12 V push button. Depth: 23,1 mm	09008.0.250¹ 1P NO 10 A 250 V~ push button. Depth: 23,1 mm


1-module interchangeable rockers							
							
09021 Not lightable	09021.N Neutral, lightable	09021.G Customizable	09026.DND Do Not Disturb, with diffuser, lightable	09021.CM Not lightable	09021.N.CM Neutral, lightable	09021.G.CM Customizable	09026.DND.CM Do Not Disturb, with diffuser, lightable




White

Carbon Matt


1-module interchangeable rockers




**09026.PLS**  
Please Clean,  
with diffuser,  
lightable




**09021.C**  
Bell symbol,  
lightable




**09021.L**  
Light symbol,  
lightable



**09021.P**  
Key symbol,  
lightable




**09026.PLS.CM**  
Please Clean,  
with diffuser,  
lightable




**09021.C.CM**  
Bell symbol,  
lightable




**09021.L.CM**  
Light symbol,  
lightable




**09021.P.CM**  
Key symbol,  
lightable




**09021.F**  
Fan symbol,  
lightable




**09021.H**  
Flame symbol,  
lightable




**09021.S**  
Switch ON symbol,  
lightable



**09021.F.CM**  
Fan symbol,  
lightable



**09021.H.CM**  
Flame symbol,  
lightable




**09021.S.CM**  
Switch ON symbol,  
lightable


2-module interchangeable buttons




**09022**  
Not lightable



**09022.N**  
Neutral, lightable




**09022.CM**  
Not lightable



**09022.N.CM**  
Neutral, lightable


1P special switches 250 V~



**09052**  
NO 10 A,  
cord-operated.  
Depth: 24,7 mm




**09050**  
NO 10 A, with  
lightable name-plate  
- 2 modules.  
Depth: 25,2 mm




**09052.CM**  
NO 10 A,  
cord-operated.  
Depth: 24,7 mm

1P push buttons 250 V~




**09066**  
Two independent  
NO 10 A  
Depth: 29 mm




**09066.CM**  
Two independent  
NO 10 A  
Depth: 29 mm


Switches for roller blind control 250 V~




**09060**  
2P 10 AX 2-way  
switch,  
OFF-central.  
Depth: 33,5 mm



**09062**  
1P NO 10 A  
2-interlocked  
push buttons.  
Depth: 29 mm




**09060.CM**  
2P 10 AX 2-way  
switch,  
OFF-central.  
Depth: 33,5 mm



**09062.CM**  
1P NO 10 A  
2-interlocked  
push buttons.  
Depth: 29 mm

NEVE UP


Devices




White

Carbon Matt

Quid - Electronic relay modules and control unit modules for roller shutters




**03996**  
Centralizable relay module, slat orientation,  
with relay outputs for cosφ 0,6 motor 2 A  
220-240 V~ 50/60 Hz, position saving, for  
backside or junction boxes installation




**03997**  
Control unit module, 2 inputs for NO push  
button, 6 outputs for Quid roller shutter  
relay module (03996), 220-240 V~ 50/60 Hz  
power supply, for backside or junction boxes  
installation


Dimmers\*\*




**09135.1**  
MASTER,  
universal  
**09135.1.120**  
As above,  
120 V~.  
Depth: 41,5 mm




**09153**  
100-500 W  
push-push +  
potentiometer,  
230 V~.  
Depth:  
40 mm




**\*09146**  
60-900 W  
60-300 VA,  
potentiometer,  
230 V~.  
Depth:  
40 mm




**09147**  
30-500 W  
30-300 VA,  
potentiometers,  
120 V~.  
Depth:  
40 mm




**09135.1.CM**  
MASTER,  
universal  
**09135.1.120.CM**  
As above,  
120 V~.  
Depth: 41,5 mm



**09153.CM**  
100-500 W  
push-push +  
potentiometer,  
230 V~.  
Depth:  
40 mm











**\*09146.CM**  
60-900 W  
60-300 VA,  
potentiometer,  
230 V~.  
Depth:  
40 mm



**09147.CM**  
30-500 W  
30-300 VA,  
potentiometer,  
120 V~.  
Depth:  
40 mm

Dimmer - controllable loads

Type	UNIVERSAL								
LOADS	DIMMER	09135.1				09135.1.120			
		2-wire connection		3-wire connection		2-wire connection		3-wire connection	
		LE	TE	LE	TE	LE	TE	LE	TE
Incandescence		40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W
Compact fluorescent lamps (CFL)		10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps
LED		5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 10 lamps	3 ÷ 200 W max 20 lamps	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 8 lamps	3 ÷ 200 W max 16 lamps
Electronic transformers for halogen lamps		40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 


Dimmer - controllable loads

Type	STANDARD		
LOADS	DIMMER	09153 (with push-push switch and rotary potentiometer control)	09146 (with rotary potentiometer)
		09147 (with rotary potentiometer)	
Incandescence		100 - 500 W	60 - 900 W
Ferromagnetic transformers for halogen lamps			60 - 300 VA 230 V~, 50/60 Hz
			30 - 300 VA 120 V~, 50/60 Hz

Infrared switches



**09181**  
Lighting switch, NO 6 A 230 V~  
relay output, 50/60 Hz.  
Depth: 37 mm



**09181.CM**  
Lighting switch, NO 6 A 230 V~  
relay output, 50/60 Hz.  
Depth: 37 mm

46

\*Not for use in European countries

▲ New article



























Δ Available while stocks last

47























° Lamps and signalling units, page 59

\*\* Please refer to instruction sheets for load type

Devices • Socket outlets

White	Carbon Matt
Smart radio frequency devices	
 <b>03955</b> Flat control with four push buttons with 868 MHz radio frequency transmitter, EnOcean standard, energy harvesting power supply provided by the built-in electro-dynamic generator, 2 modules.	 <b>03925</b> Flat control with four push buttons with 2.4 GHz radio frequency transmitter, Bluetooth Low Energy standard, energy harvesting power supply provided by the built-in electro-dynamic generator, 2 modules.
 <b>03905</b> Flat control with four push buttons with 2.4 GHz radio frequency transmitter, ZigBee Green Power standard without batteries, power supply provided by the built-in electro-dynamic generator, 2 modules.	 <b>03906</b> Flat control with four push buttons with 2.4 GHz radio frequency transmitter, ZigBee Green Power and Friends of Hue standard, energy harvesting power supply provided by the built-in electro-dynamic generator, 2 modules.
 <b>09507</b> Mounting frame for surface mounting of EnOcean, Bluetooth, ZigBee radio controls to be completed with Neve UP 2-module cover plates	 <b>09507.CM</b> Mounting frame for surface mounting of EnOcean, Bluetooth, ZigBee radio controls to be completed with Neve UP 2-module cover plates
 <b>09506</b> 1-module interchangeable button for EnOcean, Bluetooth, ZigBee radio control - 2 pieces	 <b>09506.2</b> 2-module interchangeable button for EnOcean, Bluetooth, ZigBee radio control
 <b>09506.CM</b> 1-module interchangeable button for EnOcean, Bluetooth, ZigBee radio control - 2 pieces	 <b>09506.2.CM</b> 2-module interchangeable button for EnOcean, Bluetooth, ZigBee radio control
SICURY 2P+E Italian standard socket outlets 250 V~	
 <b>09201</b> 10 A, P11. Depth: 23,2 mm	 <b>09201.CM</b> 10 A, P11. Depth: 23,2 mm
 <b>09203</b> Bpresa 16 A, P17/11. Depth: 23,2 mm	 <b>09203.CM</b> Bpresa 16 A, P17/11. Depth: 23,2 mm
 <b>09209</b> 16 A. P30 - 2 modules. Depth: 29,3 mm	 <b>09209.CM</b> 16 A. P30 - 2 modules. Depth: 29,3 mm
 <b>09210</b> 16 A, universal - 2 modules. Depth: 26,4 mm	 <b>09210.CM</b> 16 A, universal - 2 modules. Depth: 26,4 mm
SICURY 2P+E socket outlets 250 V~ - German standard	
 <b>09208</b> 16 A, German - 2 modules. Depth: 29,5 mm	 <b>09208.CM</b> 16 A, German - 2 modules. Depth: 29,5 mm
 <b>▲ 09208.USB</b> 16 A, German - 2 modules. Depth: 32,4 mm	 <b>▲ 09208.USB.CM</b> 16 A, German - 2 modules. Depth: 32,4 mm
 <b>09208.C</b> 16 A, German, with cover - 2 modules. Depth: 29,5 mm	 <b>09208.C.CM</b> 16 A, German, with cover - 2 modules. Depth: 29,5 mm
SICURY 2P+E socket outlets 250 V~ - French standard	
 <b>09212</b> 16 A, French - 2 modules. Depth: 26,4 mm	 <b>09212.CM</b> 16 A, French - 2 modules. Depth: 26,4 mm

Socket outlets

White	Carbon Matt
Socket outlets 250 V~ - Euro-American standard	
 <b>09233</b> 2P 16 A, Euro-American (ø 4,8 mm). Depth: 30 mm	 <b>09233.CM</b> 2P 16 A, Euro-American (ø 4,8 mm). Depth: 30 mm
 <b>09234</b> SICURY 2P 16 A, Euro-American. Depth: 30 mm	 <b>09234.CM</b> SICURY 2P 16 A, Euro-American. Depth: 30 mm
 <b>09248</b> SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm	 <b>09248.CM</b> SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm
 <b>09249</b> Two SICURY 2P+E 16 A, Euro-American - 3 modules. Depth: 24,5 mm	 <b>09249.CM</b> Two SICURY 2P+E 16 A, Euro-American - 3 modules. Depth: 24,5 mm
Socket outlets 127 V~ - USA and Arabian standard	
 <b>09242</b> SICURY 2P+E 15 A, USA and Arabian - 3 modules	 <b>09242.CM</b> SICURY 2P+E 15 A, USA and Arabian - 3 modules
 <b>09243</b> Two SICURY 2P+E 15 A, USA and Arabian - 3 modules	 <b>09243.CM</b> Two SICURY 2P+E 15 A, USA and Arabian - 3 modules
 <b>09245</b> 2P+E 15 A, USA and Arabian. Depth: 27 mm	 <b>09245.CM</b> 2P+E 15 A, USA and Arabian. Depth: 27 mm
 <b>09246</b> Two 2P+E 15 A, USA and Arabian - 3 modules. Depth: 26 mm	 <b>09246.CM</b> Two 2P+E 15 A, USA and Arabian - 3 modules. Depth: 26 mm
SICURY 2P+E socket outlets 250 V~ - Israeli standard	
 <b>09240</b> 16 A, Israeli - 2 modules. Depth: 29,7 mm	 <b>09240.CM</b> 16 A, Israeli - 2 modules. Depth: 29,7 mm
SICURY 2P+E socket outlets 250 V~ - Multistandard	
 <b>*09257</b> 13 A, multistandard - 2 modules. Depth: 18,7 mm	 <b>*09257.CM</b> 13 A, multistandard - 2 modules. Depth: 18,7 mm
Socket outlets 2P+E 15 A 125 V~ 60 Hz - American standard	
 <b>00296</b> Double American standard with GFCI - 3 modules. Depth: 30,1 mm	 <b>00296.CM</b> Double American standard with GFCI - 3 modules. Depth: 30,1 mm



White	Carbon Matt
-------	-------------

Possible matches between plugs and sockets according to different national standards

SOCKET OUTLET PLUG	German	Italian				French	Euroamerican				American Saudi Arabian				Israeli	Multistandard
	09208..	09201..	09203..	09209..	09210..	09212..	09233	09234	09248	09249	09242	09245	09243	09246	09240	09257
S10 Italian standard	●	●	●	●	●	●	●	●	●	●					●	●
S11 Italian standard		●	●	●	●											
S17 Italian standard			●		●											
2P 2,5 A Europlug	●	●	●	●	●	●	●	●	●	●					●	●
2P+E 16 A 250 V~ German standard	●			●	●		○	○	○	○					○	○
2P+E 16 A 250 V~ German and French standards	●			●	●	●	○	○	○	○					○	
2P 16 A 250 V~ German and French standards	●			●	●	●	●	●	●	●					●	
2P+E 16 A 250 V~ French standard				○	○	●	○	○	○	○					○	
2P+E 10 A 250 V~ Swiss standard																●
2P+E 16 A 250 V~ Israeli standard															●	
2P+E 5 A 250 V~ English standard																●
2P+E 13 A 250 V~ English standard																●
2P+E 15 A 125 V~ American standard								●	●	●	●	●	●	●		
2P 15 A 127 V~ American and Saudi Arabian standards											●	●	●	●		
2P+E 10 A 250 V~ Brazilian standard																●
2P+E 10 A 250 V~ Chinese standard																●
2P+E 10 A 250 V~ Australian standard																●

● Plug standard matches socket outlet;    ○ Plug standard matches the socket outlet without earth connection.

Shaver supply units



**09290**  
230 V~ 50/60 Hz, with 20 VA  
isolating transformer, 230 V~ and  
120 V~ outputs - 3 modules.  
Depth: 42 mm



**09290.CM**  
230 V~ 50/60 Hz, with 20 VA  
isolating transformer, 230 V~ and  
120 V~ outputs - 3 modules.  
Depth: 42 mm

SICURY 2P+E socket outlets 250 V~ (for dedicated supply lines)



**09203.R**  
Bpresa 16 A  
P17/11, red.  
Depth: 23,2 mm



**09210.R**  
16 A, universal,  
red - 2 modules.  
Depth: 26,4 mm



**09208.A**  
16 A, German,  
orange - 2 modules.  
Depth: 29,5 mm



**09208.R**  
16 A, German,  
red - 2 modules.  
Depth: 29,5 mm



**09208.V**  
16 A, German,  
green - 2 modules.  
Depth: 29,5 mm



**09240.R**  
16 A, Israeli,  
red - 2 modules.  
Depth: 29,7 mm

White	Carbon Matt
-------	-------------

USB supply unit



**09292**  
7,5 W 1,5 A,  
1 USB-A,  
120-240 V~  
50/60 Hz.  
Depth: 37 mm



**09292.C.25**  
25 W, 1 USB-C,  
120-240 V~  
50/60 Hz.  
Depth: 37 mm



**09292.AC.15**  
15 W 3 A, USB  
A+C, 120-240 V  
~ 50/60 Hz.  
Depth: 37 mm



**09292.CC**  
15 W 3 A,  
USB C+C,  
120-240 V ~  
50/60 Hz.  
Depth: 37 mm



**09292.CM**  
7,5 W 1,5 A,  
1 USB-A,  
120-240 V~  
50/60 Hz.  
Depth: 37 mm



**09292.C.25.CM**  
25 W, 1 USB-C,  
120-240 V~ 50/60  
Hz.  
Depth: 37 mm



**09292.AC.15.CM**  
15 W 3 A, USB  
A+C, 120-240 V ~  
50/60 Hz.  
Depth: 37 mm



**09292.CC.CM**  
15 W 3 A,  
USB C+C,  
120-240 V ~  
50/60 Hz.  
Depth: 37 mm

Special socket outlets



**09330**  
2P 6 A 24 V  
(SELV), for  
01620 plug.  
Depth: 25 mm



**09330.CM**  
2P 6 A 24 V  
(SELV), for  
01620 plug.  
Depth: 25 mm

Phone socket outlets



**09320**  
RJ11,  
6-position  
4-contact (6/4).  
Depth:  
33,6 mm



**09324**  
Israeli stan-  
dard, screw  
terminals.  
Depth:  
33,4 mm



**09320.CM**  
RJ11,  
6-position  
4-contact (6/4).  
Depth:  
33,6 mm



**09324.CM**  
Israeli stan-  
dard, screw  
terminals.  
Depth:  
33,4 mm

Coaxial TV-RD-SAT 5-2400 MHz socket outlets (output Ø 9,5 mm male and F-type female)



**09300.01**  
Male, single  
connection  
1 dB.  
Depth:  
26,1 mm



**09300.10**  
Male,  
through-line  
10 dB.  
Depth:  
26,1 mm



**09302.01**  
Demix, male and  
F-type, single  
connection 1 dB  
- 2 modules.  
Depth: 22,1 mm



**09300.01.CM**  
Male, single  
connection  
1 dB.  
Depth:  
26,1 mm



**09300.10.CM**  
Male,  
through-line  
10 dB.  
Depth:  
26,1 mm



**09302.01.CM**  
Demix, male and  
F-type, single  
connection 1 dB  
- 2 modules.  
Depth: 22,1 mm

NEVE UP

Signal reception socket



White	Carbon Matt
-------	-------------

Coaxial sockets TV-FM-SAT 5–2400 MHz (3 outputs: Ø 9.5 mm male, female, and F-type)



**09303**  
Single connection  
1 dB - 2 modules.  
Depth: 22 mm



**09303.CM**  
Single connection  
1 dB - 2 modules.  
Depth: 22 mm

Coaxial TV 40-862 MHz socket outlets (1 output: Ø 9,5 mm female) and F-type socket outlets



**\*09313**  
Single connection.  
Depth: 29 mm



**09318**  
With F-type female  
connector.  
Depth: 9 mm



**\*09313.CM**  
Single connection.  
Depth: 29 mm



**09318.CM**  
With F-type female  
connector.  
Depth: 9 mm

Terminal resistors and coaxial TV-RD-SAT 2400 MHz connectors



**16330**  
Z 75 Ω, for frequencies  
up to 2400 MHz



**01644**  
Male,  
axial cable entry



**01645**  
Female,  
axial cable entry



**01634**  
Male,  
90°-cable entry



**01635**  
Female,  
90°-cable entry



**01654**  
Male, F-type, for  
RG59 cable

RJ45 data ports



**09338.9**  
Netsafe,  
Cat. 5e,  
UTP.  
Depth: 26 mm



**09339.6**  
Netsafe,  
Cat. 6,  
UTP 110.  
Depth: 34,2 mm



**09339.14**  
Netsafe,  
Cat. 6,  
FTP.  
Depth: 39,7 mm



**09339.16**  
Netsafe,  
Cat. 6<sup>+</sup>,  
FTP.  
Depth: 39,7 mm



**Δ 09338.C**  
Adaptor, RJ45  
Cat. 5/6 AMP,  
Keystone,  
Lucent T.  
Depth: 9 mm



**09338.9.CM**  
Netsafe,  
Cat. 5e,  
UTP.  
Depth: 26 mm



**09339.6.CM**  
Netsafe,  
Cat. 6,  
UTP 110.  
Depth: 34,2 mm



**09339.14.CM**  
Netsafe,  
Cat. 6,  
FTP.  
Depth: 39,7 mm



**09339.16.CM**  
Netsafe,  
Cat. 6<sup>+</sup>,  
FTP.  
Depth: 39,7 mm



**Δ 09338.C.CM**  
Adaptor, RJ45  
Cat. 5/6 AMP,  
Keystone,  
Lucent T.  
Depth: 9 mm

NEVE UP

Signalling



White	Carbon Matt
-------	-------------

Keystone universal adaptors



**09339.C**  
Adaptor,  
Keystone.  
Depth: 9 mm



**09339.C.CM**  
Adaptor,  
Keystone.  
Depth: 9 mm

Electromechanical bells - Buzzers



**09372.SR**  
Ringtone/buzzer  
120 V~ 50-60 Hz.  
Depth: 31.8 mm



**09373.SR**  
Ringtone/buzzer  
230 V~ 50-60 Hz.  
Depth: 31.8 mm



**09372.SR.CM**  
Ringtone/buzzer  
120 V~ 50-60 Hz.  
Depth: 31.8 mm



**09373.SR.CM**  
Ringtone/buzzer  
230 V~ 50-60 Hz.  
Depth: 31.8 mm

Double pilot lights (for signalling unit)



**09388**  
Dual indicator light for 2 signalling  
units, neutral diffusers  
Depth: 23 mm



**09388.CM**  
Dual indicator light for 2 signalling  
units, neutral diffusers  
Depth: 23 mm

TORCIA, electronic hand-lamps (with automatic emergency device)



**09395**  
With high-efficiency LED,  
230 V~ 50/60 Hz - 2 modules.  
Depth: 41,3 mm













**09395.CM**  
With high-efficiency LED,  
230 V~ 50/60 Hz - 2 modules.  
Depth: 41,3 mm











**00910**  
Ni-MH 4,8 V 80 mAh battery,  
spare part for TORCIA





White	Carbon Matt
Thermostats and timer-thermostats (heating and air-conditioning)	
 <p><b>09470</b> Rotary dial thermostat for ambient temperature control, 5(2) A 240 V~ relay output, heating and air-conditioning ON/OFF, class I temperature control device (contribution 1%) in ON/OFF mode, white LED backlighting and brightness regulation, 100-240 V 50/60 Hz - 2 modules. Depth: 28,5 mm</p>	 <p><b>09470.CM</b> Rotary dial thermostat for ambient temperature control, 5(2) A 240 V~ relay output, heating and air-conditioning ON/OFF, class I temperature control device (contribution 1%) in ON/OFF mode, white LED backlighting and brightness regulation, 100-240 V 50/60 Hz - 2 modules. Depth: 28,5 mm</p>
 <p><b>02900.1</b> Electronic thermostat for ON/OFF ambient temperature control (heating and air-conditioning), class I temperature control device (contribution 1%), change-over relay output 5(2) A 240 V~, AA LR6 1,5 V battery-powered (not supplied), surface mounting, white</p>	 <p><b>01910</b> Electronic timer-thermostat for ON/OFF ambient temperature control (heating and air-conditioning), daily/weekly programming, class I temperature control device (contribution 1%), change-over relay output 5(2) A 250 V~, AA LR6 1,5 V battery-powered (not supplied), surface mounting, white</p>
220-240V fan dimmer	
 <p><b>09134</b> Leading-edge dimmer 220-240 V~ 50/60 Hz for fans 15-150 W, ON/OFF control and regulation by built-in push button or via NO peripheral push buttons, 4-speed adjustment, Superslow function, visible in darkness, white. Not suitable for installation in Isoaset enclosures. Depth: 41.4 mm</p>	 <p><b>09134.CM</b> Leading-edge dimmer 220-240 V~ 50/60 Hz for fans 15-150 W, ON/OFF control and regulation by built-in push button or via NO peripheral push buttons, 4-speed adjustment, Superslow function, visible in darkness, white. Not suitable for installation in Isoaset enclosures. Depth: 41.4 mm</p>
120V fan dimmer	
 <p><b>09134.120</b> Leading-edge dimmer 120 V~ 60 Hz for fans 15-150 W, ON/OFF control and regulation by built-in push button or via NO peripheral push buttons, 4-speed adjustment, Superslow function, visible in darkness, white. Not suitable for installation in Isoaset enclosures. Depth: 41.4 mm</p>	 <p><b>09134.120.CM</b> Leading-edge dimmer 120 V~ 60 Hz for fans 15-150 W, ON/OFF control and regulation by built-in push button or via NO peripheral push buttons, 4-speed adjustment, Superslow function, visible in darkness, white. Not suitable for installation in Isoaset enclosures. Depth: 41.4 mm</p>
Switches for fan coil speed adjustment	
 <p><b>09063</b> 2P 10 AX 250 V~ switch for fan coil</p>	 <p><b>09063.CM</b> 2P 10 AX 250 V~ switch for fan coil</p>



White	Carbon Matt
Hotel solutions	
 <p><b>09026.DND</b> 1-module interchangeable button, Do Not Disturb, with diffuser, lightable</p>	 <p><b>09026.DND.CM</b> 1-module interchangeable button, Do Not Disturb, with diffuser, lightable</p>
 <p><b>09026.PLS</b> 1-module interchangeable button, Please Clean, with diffuser, lightable</p>	 <p><b>09026.PLS.CM</b> 1-module interchangeable button, Please Clean, with diffuser, lightable</p>
 <p><b>09388.SC</b> Double room status indicator for 2 signalling units: do not disturb and make up room</p>	 <p><b>09388.SC.CM</b> Double room status indicator for 2 signalling units: do not disturb and make up room</p>
 <p><b>09097</b> 1P NO 10 A 230 V~ push button, for hotel "Do Not Disturb" and "Please Clean" lightable - 2 modules. Depth: 27,2 mm</p>	
 <p><b>*09257</b> 2P+E 13 A 250 V~ SICURY socket outlet, multistandard - 2 modules. Depth: 18,7 mm</p>	 <p><b>*09257.CM</b> 2P+E 13 A 250 V~ SICURY socket outlet, multistandard - 2 modules. Depth: 18,7 mm</p>
 <p><b>09290</b> Shaver supply unit with 20 VA isolating transformer, 230 V~ 50/60 Hz, 230 V~ and 120 V~ outputs - 3 modules. Depth: 42 mm</p>	 <p><b>09290.CM</b> Shaver supply unit with 20 VA isolating transformer, 230 V~ 50/60 Hz, 230 V~ and 120 V~ outputs - 3 modules. Depth: 42 mm</p>
 <p><b>09463</b> Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules. Depth: 24,7 mm</p>	 <p><b>09463.CM</b> Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules. Depth: 24,7 mm</p>
 <p><b>09465</b> Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm</p>	 <p><b>09465.CM</b> Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm</p>

NEVE UP

View Wireless Smart home



White	Carbon Matt
-------	-------------

Gateway



**09597**  
IoT Bluetooth Wi-Fi Gateway for integration, configuration, supervision of VIEW Wireless, via Cloud and App for smartphone, tablet, 100-240 V 50/60 Hz power supply - 2 modules  
Depth: 37.2 mm



**09597.CM**  
IoT Bluetooth Wi-Fi Gateway for integration, configuration, supervision of VIEW Wireless, via Cloud and App for smartphone, tablet, 100-240 V 50/60 Hz power supply - 2 modules  
Depth: 37.2 mm



**OK14597.01**  
Wi-Fi Bluetooth wireless technology gateway for integration, configuration and supervising of View Wireless system by Cloud and app for smartphone and tablet, supply voltage 100-240 V 50/60 Hz, on DIN (60715 TH35) rail installation, occupies 2 17,5 mm modules

Connected 2-way switch for lights



**09592**  
VIEW Wireless electronic 2-way switch with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, 1 input for external button for actuator control or to recall a scenario, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply  
Depth: 37.9 mm



**09592.2**  
As for 09592, 2 modules  
Depth: 37.9 mm



**09592.CM**  
VIEW Wireless electronic 2-way switch with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, 1 input for external button for actuator control or to recall a scenario, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply  
Depth: 37.9 mm



**09592.2.CM**  
As for 09592.CM, 2 modules  
Depth: 37.9 mm



NEVE UP

View Wireless Smart home



White	Carbon Matt
-------	-------------

Connected controls for roller shutters



**09594.0**  
VIEW Wireless electronic control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0.6 motor 2 A 100-240 V~ 50/60 Hz, local control with push button or remote control, double IoT technology on Bluetooth® technology 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, 1 input for external push button to recall a scenario, favourite position recall function, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply, to be completed with two interchangeable half-button caps, 1 Neve UP module.  
Depth: 37.9 mm



**09755.2**  
Two 1-module interchangeable arrow symbol half-button caps, 1 module



**09755.2.CM**  
Two 1-module interchangeable arrow symbol half-button caps, 1 module

Connected actuator for roller shutters



**03982**  
Actuator for 1 roller shutter with slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0

Connected dimmers



**09595.0**  
VIEW Wireless electronic dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, 1 input for external push button for dimmer control or to recall a scenario, dimmer off operation, RGB LED visible in darkness with brightness control, 220-240 V 50/60 Hz power supply, to be completed with Neve UP 1-module interchangeable buttons  
Depth: 37.8 mm



**09595.0.120**  
VIEW Wireless electronic dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, 1 input for external push button for dimmer control or to recall a scenario, RGB LED visible in darkness with brightness control, 120 V 50/60 Hz power supply, to be completed with Neve UP 1-module interchangeable buttons  
Depth: 37.8 mm



NEVE UP

View Wireless Smart home



White	Carbon Matt
-------	-------------

Connected electronic control

Bluetooth

**09591.0**

VIEW Wireless electronic control mechanism, local control with push button or remote control, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply, to be completed with Neve UP 1-module interchangeable buttons.

Depth: 37.9 mm

**09755**

Two interchangeable half-button caps, neutral, 1 module

**09755.2**

Two interchangeable half-button caps, arrow symbol, 1 module

**09755.3**

Two interchangeable half-button caps, dimmer symbols, 1 module

**09755.6**

Two interchangeable half-button caps, scenario symbols, 1 module

**09755.CM**

Two interchangeable half-button caps, neutral, 1 module

**09755.2.CM**

Two interchangeable half-button caps, arrow symbol, 1 module

**09755.3.CM**

Two interchangeable half-button caps, dimmer symbols, 1 module

**09755.6.CM**

Two interchangeable half-button caps, scenario symbols, 1 module

Connected socket outlet actuators

Bluetooth zigbee

**09593**

VIEW Wireless electronic control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, function for measuring the instant power and energy consumed and load cut-off threshold, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply. Depth: 40 mm

**09593.CM**

VIEW Wireless electronic control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, function for measuring the instant power and energy consumed and load cut-off threshold, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply. Depth: 40 mm

Connected actuator

Bluetooth zigbee

Connected actuator

Bluetooth

**03981**

Control device with NO 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, remote control, 1 input for wired control to recall a scenario, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0

**03983**

VIEW Wireless electronic module with 3 programmable digital inputs for potential-free contacts, 1 programmable NO/NC relay output for SELV voltage-free contact, IoT technology on Bluetooth 5.0 standard to create the VIEW Wireless mesh system, 100-240 V 50/60 Hz power supply, flush mounting (retrofit)

NEVE UP

View Wireless Smart home



White	Carbon Matt
-------	-------------

Connected Energy meter

Bluetooth

Connected sensors

Bluetooth

**02963**

IoT device for consumption meter/production of instantaneous electricity and consumption logs (with hourly, daily, monthly, annual resolution), load control function (max 8 loads), 1 input for toroidal current sensor supplied, detectable power 25 W-10 kW, single-phase power supply 100-240 V 50/60 Hz, IoT technology on Bluetooth technology 5.0 standard for the creation of VIEW Wireless mesh system, installation on DIN rail (60715 TH35), occupies 1 module measuring 17.5 mm.

**03980**

Magnetic contact for doors and windows, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 input for voltage-free contact, powered by AA LR6 1.5 V batteries (not supplied), white. For use as an accessory of the connected thermostat or, in combination with the IoT gateway, as a sensor for magnetic contact or voltage-free contact input opening/closing notifications.

Connected thermostats

Bluetooth

**Δ 09473**

Rotary dial thermostat for ambient temperature control, 5(2) A 240 V~ relay output, IoT technology on Bluetooth® wireless technology 5.0 for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm

**Δ 09473.CM**

Rotary dial thermostat for ambient temperature control, 5(2) A 240 V~ relay output, IoT technology on Bluetooth® wireless technology 5.0 for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm

**▲ 09474**

Dial thermostat with relay output NO 5(2) A 240 V~, 3-speed and proportional fan coil control, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 input for external temperature sensor, heating and air conditioning in ON/OFF and PID mode, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting with brightness control, 100-240 V 50/60 Hz power supply - 2 modules Depth: 28.5 mm

**▲ 09474.CM**

Dial thermostat with relay output NO 5(2) A 240 V~, 3-speed and proportional fan coil control, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 input for external temperature sensor, heating and air conditioning in ON/OFF and PID mode, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting with brightness control, 100-240 V 50/60 Hz power supply - 2 modules Depth: 28.5 mm

Thermostatic head

Bluetooth

**03989**

Thermostatic head, IoT technology, Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, heating in PI mode, class IV temperature control device (contribution 2%), display with white LED backlighting, AA alkaline batteries (not rechargeable), installation on radiators equipped with flow control valves. Mechanical adaptors supplied for compatibility with the main valves: RA Danfoss, RAV Danfoss, RAVL, Danfoss, Giacomini, Caleffi, M28x1.5, FAR.

DIN rail mounted actuators

Bluetooth

**03985**

Electronic control actuator with 4 relay outputs 16 A 240 V~, programmable NO/NC with function to control lights, roller shutters with slat orientation, fan coil, climate control, accesses, sprinkler system, push buttons for local control, IoT technology on Bluetooth 5.0 standard for the creation of View Wireless mesh system and on Zigbee 3.0 standard, 100-240 V 50/60 Hz power supply, installation on DIN rail (60715 TH35), occupies 4 modules size 17.5 mm

**03986**

VIEW Wireless electronic control actuator with 1 proportional analogue 0/1-10 V output with re-scalable voltage, 1 10 AX relay output 100-240 V~ 50/60 Hz, programmable NO/NC with function to control lights, fan coil, climate control, accesses, sprinkler system, push button for local control, IoT technology on Bluetooth 5.0 standard for the creation of View Wireless mesh system and on Zigbee 3.0 standard, 100-240 V 50/60 Hz power supply, installation on DIN rail (60715 TH35), occupies 2 modules size 17.5 mm

NEVE UP


View Wireless Smart home




White	Carbon Matt
-------	-------------

Connected radar sensor

Bluetooth®



**09179**  
UWB radar sensor, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply  
Depth: 39.9 mm



**09179.CM**  
UWB radar sensor, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply  
Depth: 39.9 mm




**02692**  
UWB radar sensor, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, false ceiling installation.




**02692.S.1**  
Round section adaptor for ceiling installation of the IoT connected radar sensor 02692.

Connected access control


Bluetooth®




**09462**  
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 32.5 mm




**09462.CM**  
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 32.5 mm




**09467**  
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, LED visible in darkness with brightness control, 100-240 V~ 50/60 Hz power supply, Next - 2 modules. Depth: 32.5 mm



**09467.C**  
Card holder cover for NFC/RFID reader pocket and badge switch, 2 modules.



**09467.CM**  
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, LED visible in darkness with brightness control, 100-240 V~ 50/60 Hz power supply, Next - 2 modules. Depth: 32.5 mm



**09467.C.CM**  
Card holder cover for NFC/RFID reader pocket and badge switch, 2 modules.

NEVE UP

Accessories



White	Carbon Matt
-------	-------------

LED signalling units

Accessories for floor mounting



12-24 V~ - 0,1 W  
**00935.A:** amber  
**00935.G:** green  
**00935.R:** red  
**00935.B:** blue  
**00935.W:** white  
▲ **00935.WW:** warm white

120 V~ 50/60 Hz - 0,2 W  
**00936.120.A:** amber  
**00936.120.G:** green  
**00936.120.R:** red  
**00936.120.B:** blue  
**00936.120.W:** white

250 V~ 50/60 Hz - 0,35 W  
**00936.250.A:** amber  
**00936.250.G:** green  
**00936.250.R:** red  
**00936.250.B:** blue  
**00936.250.W:** white  
▲ **00935.250.WW:** warm white




**V54303**  
Floor mount turret for Neve Up devices installation in V54903 box. Supplied with 3-module mounting frame




**V54903**  
Flush box for floor mount turret V54303




IP40 enclosures




09802  
2 modules




09803  
3 modules




09804  
4 modules



09802




09803

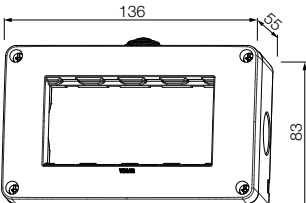


09804


IP55 enclosures




09902  
2 modules




09903  
3 modules




09904  
4 modules



09902




09903

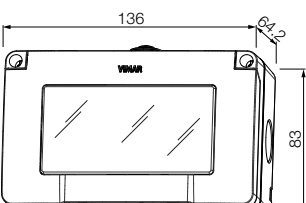


09904


IP55 covers




09911.01  
with claws, for ø 60 mm boxes, white - 2 modules




09911.04  
with claws, for ø 60 mm boxes, black - 2 modules




09811..




09912.01  
with screws, for mounting boxes with 60 mm distance between centres, white - 2 modules




09912.04  
with screws, for mounting boxes with 60 mm distance between centres, black - 2 modules




09912..




09913.01  
with screws, for mounting boxes 3 modules, white - 3 modules




09913.04  
with screws, for mounting boxes 3 modules, black - 3 modules

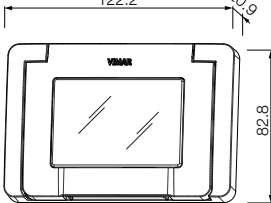


09913..



09914.01  
with screws, for mounting boxes 4 modules, white - 4 modules

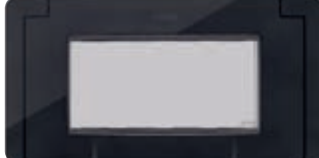

09914.04  
with screws, for mounting boxes 4 modules, black - 4 modules

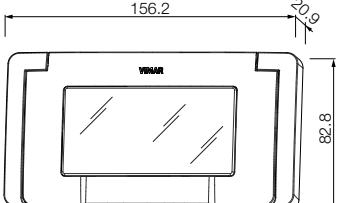

09914..

Glossy  
(Technopolymer)



01 White (Total Look)



02 Ivory




03 Slate grey



04 Black

Matt  
(Matt painted technopolymer)

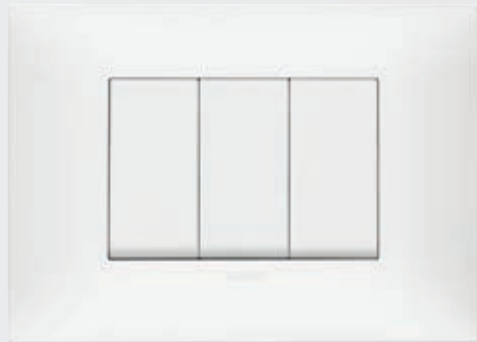


11 Matt white



12 Matt dove grey




13 Matt clay

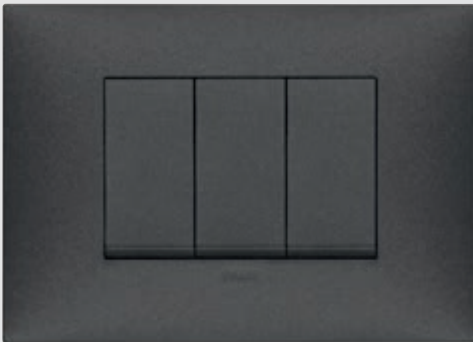

14 Carbon matt (Total Look)

Metal  
(Metallic painted technopolymer)

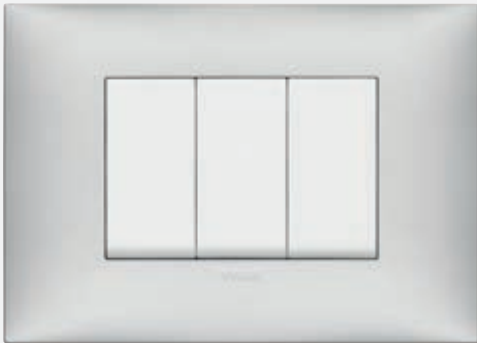

21 Matt silver



22 Matt nickel



























23 Matt titanium




















24 Matt copper













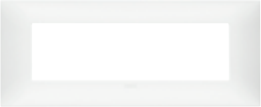


	1-central-module	2-module	1-central-module	2-separate-module	2-central-module	3-module
						
Glossy (Technopolymer)						
 White (Total Look)	09661.01	09662.01	09671.01	09679.01	09672.01	09673.01
 Ivory	09661.02	09662.02	09671.02	09679.02	09672.02	09673.02
 Slate grey	09661.03	09662.03	09671.03	09679.03	09672.03	09673.03
 Black	09661.04	09662.04	09671.04	09679.04	09672.04	09673.04
Matt (Matt painted technopolymer)						
 Matt white	09661.11	09662.11	09671.11	09679.11	09672.11	09673.11
 Matt dove grey	09661.12	09662.12	09671.12	09679.12	09672.12	09673.12
 Matt clay	09661.13	09662.13	09671.13	09679.13	09672.13	09673.13
 Carbon matt (Total Look)	09661.14	09662.14	09671.14	09679.14	09672.14	09673.14
Metal (Metallic painted technopolymer)						
 Matt silver	09661.21	09662.21	09671.21	09679.21	09672.21	09673.21
 Matt nickel	09661.22	09662.22	09671.22	09679.22	09672.22	09673.22
 Matt titanium	09661.23	09662.23	09671.23	09679.23	09672.23	09673.23
 Matt copper	09661.24	09662.24	09671.24	09679.24	09672.24	09673.24

3-blank-module	4-module	7-module	2+2-module (between centres 71 mm)	2+2+2-module (between centres 71 mm)	2+2+2+2-module (between centres 71 mm)
					
09670.01	09674.01	09677.01	09664.01	09666.01	09668.01
09670.02	09674.02	09677.02	09664.02	09666.02	09668.02
09670.03	09674.03	09677.03	09664.03	09666.03	09668.03
09670.04	09674.04	09677.04	09664.04	09666.04	09668.04
09670.11	09674.11	09677.11	09664.11	09666.11	09668.11
09670.12	09674.12	09677.12	09664.12	09666.12	09668.12
09670.13	09674.13	09677.13	09664.13	09666.13	09668.13
09670.14	09674.14	09677.14	09664.14	09666.14	09668.14
09670.21	09674.21	09677.21	09664.21	09666.21	09668.21
09670.22	09674.22	09677.22	09664.22	09666.22	09668.22
09670.23	09674.23	09677.23	09664.23	09666.23	09668.23
09670.24	09674.24	09677.24	09664.24	09666.24	09668.24























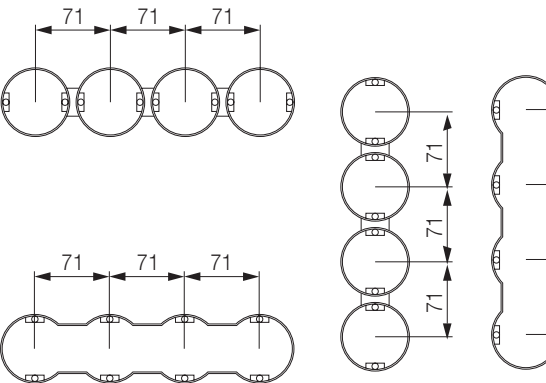
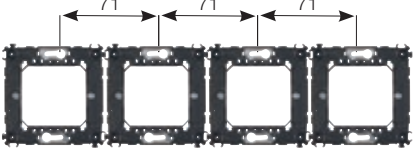
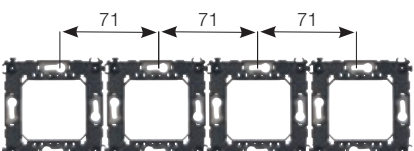
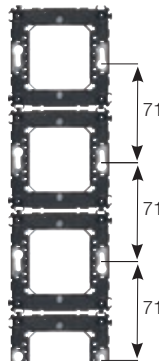
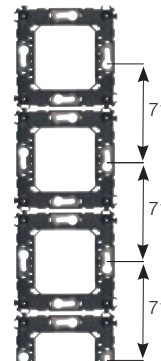


Types of mounting: Italian/American standard

Module	Box	Frame	Cover plate*
2-central for ø 60 mm and 3-module mounting box	 <b>V71001</b> For masonry GW 650 °C, light blue <b>V71001.AU</b> GW 960 °C, black	 <b>V71701</b> For hollow walls, for frame without claws, GW 850 °C, light blue	 <b>Δ 09606</b> 2-central module, for horizontal installation
	 <b>V71303</b> For masonry GW 650 °C, light blue <b>V71303.AU</b> GW 960 °C, black	 <b>V71703</b> For hollow walls, GW 850 °C, light blue	 <b>09607</b> 2-central module, for vertical installation
	 4x2" mounting box		 <b>09672...</b> 2-central-module, for horizontal and vertical installation. Dimensions: 120x86x8,5 mm
3	 <b>V71303</b> For masonry GW 650 °C, light blue <b>V71303.AU</b> GW 960 °C, black	 <b>V71703</b> For hollow walls, GW 850 °C, light blue	 <b>09613</b> 3-module
3	 <b>V71303</b> For masonry GW 650 °C, light blue <b>V71303.AU</b> GW 960 °C, black	 <b>V71703</b> For hollow walls, GW 850 °C, light blue	 <b>09671...</b> 1-central-module. Dimensions: 120x86x8,9 mm
	 4x2" mounting box	 <b>09623</b> 3-module, to use for installation of Plana devices	 <b>09679...</b> 2-separate-module. Dimensions: 120x86x9 mm

Module	Box	Frame	Cover plate*
3	 <b>V71303</b> For masonry GW 650 °C, light blue <b>V71303.AU</b> GW 960 °C, black	 <b>V71703</b> For hollow walls, GW 850 °C, light blue	 <b>09613</b> 3-module
	 4x2" mounting box	 <b>09623</b> 3-module, to use for installation of Plana devices	 <b>09673...</b> 3-module. Dimensions: 120x86x8,5 mm
4	 <b>V71304</b> For masonry GW 650 °C, light blue <b>V71304.AU</b> GW 960 °C, black	 <b>V71704</b> For hollow walls, GW 850 °C, light blue	 <b>09614</b> 4-module
7	 <b>V71306</b> For masonry GW 650 °C, light blue <b>V71306.AU</b> GW 960 °C, black	 <b>V71706</b> For hollow walls, GW 850 °C, light blue	 <b>09617</b> 7-module
			 <b>09677...</b> 7-module. Dimensions: 210x86x8,4 mm

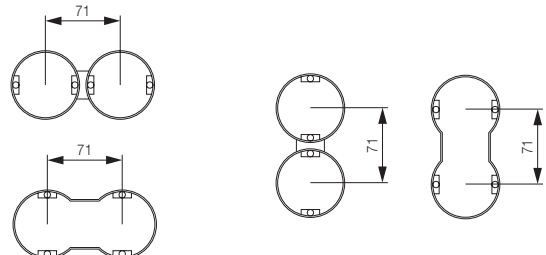


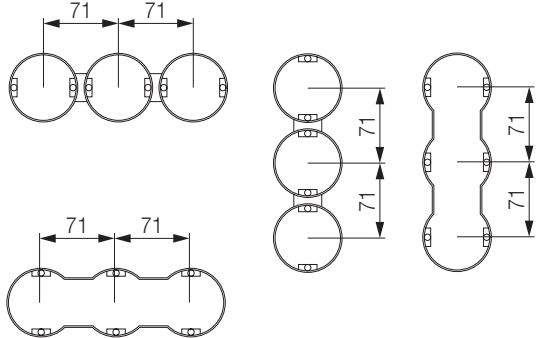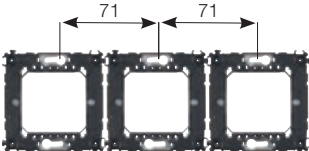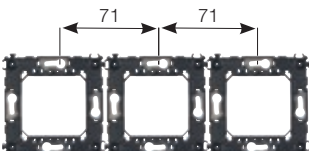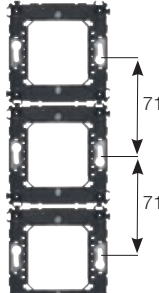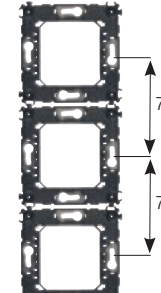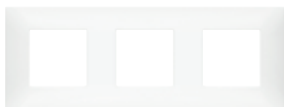Types of mounting: German/French standard

Module	Box	Frame	Cover plate*
1 for ø 60 mm mounting box	 <p><b>V71001</b> For masonry GW 650 °C, light blue <b>V71001.AU</b> GW 960 °C, black</p>	 <p><b>09602.1</b> 2-module, with claws</p>	 <p><b>09661...</b> 1-central-module. Dimensions: 86x86x8,8 mm</p>  <p><b>09662...</b> 2-module. Dimensions: 86x86x8,5 mm</p>
2 for ø 60 mm mounting box	 <p><b>V71701</b> For hollow walls, for frame without claws, GW 850 °C, light blue</p>	 <p><b>09603.1</b> 2-module, without screws</p>	 <p><b>09661...</b> 1-central-module. Dimensions: 86x86x8,8 mm</p>  <p><b>09662...</b> 2-module. Dimensions: 86x86x8,5 mm</p>
2+2 71 mm between centres		 <p><b>2 x 09602.1</b> 2-module, with claws</p>  <p><b>2 x 09603.1</b> 2-module, without screws</p>  <p><b>2 x 09602.1</b> 2-module, with claws</p>  <p><b>2 x 09603.1</b> 2-module, without screws</p>	 <p><b>09664...</b> 4-module (2+2), for horizontal and vertical installation. Dimensions: 157x86x8,5 mm</p> 
2+2+2 71 mm between centres		 <p><b>3 x 09602.1</b> 2-module, with claws</p>  <p><b>3 x 09603.1</b> 2-module, without screws</p>  <p><b>3 x 09602.1</b> 2-module, with claws</p>  <p><b>3 x 09603.1</b> 2-module, without screws</p>	 <p><b>09666...</b> 6-module (2+2+2), for horizontal and vertical installation. Dimensions: 228x86x8,5 mm</p> 
2+2+2+2 71 mm between centres		 <p><b>4 x 09602.1</b> 2-module, with claws</p>  <p><b>4 x 09603.1</b> 2-module, without screws</p>  <p><b>4 x 09602.1</b> 2-module, with claws</p>  <p><b>4 x 09603.1</b> 2-module, without screws</p>	 <p><b>09668...</b> 8-module (2+2+2+2), for horizontal and vertical installation. Dimensions: 299x86x8,5 mm</p> 

Cover plates and devices customisation

Cover plates: customisation positions  
(see area in grey)



Example of customised cover plate



Controls and buttons: positions and features

Type	Customisation position*	Backlit customisation	Not backlit customisation
1-module controls and interchangeable buttons		NO	The entire button area can be customised
Lightable 1-module controls and interchangeable buttons 09021.N and 09021.N.CM		NO	positions 1 and 2
Lightable 1-module controls and interchangeable buttons 09021.G and 09021.G.CM		position 3	positions 1 and 2
2-module controls and interchangeable buttons		NO	The entire button area can be customised
Lightable 2-module controls and interchangeable buttons 09022.N and 09022.N.CM		NO	positions 1, 2 and 3

\* when position is not indicated, the customization is possible in the whole area of the button/control

Indications for customisation

- all devices, buttons and cover plates are customized depending on conditions described below;
- if the required customisation is including in the 'Library of standard symbols and wording', indicate the item code + symbol/wording code, **if the customisation is not included in the table check its feasibility with the sales network.**
- the **visible in darkness** customization is possible only in symbol engraved buttons and with diffuser (e. g. 09021.G and 09021.G.CM).

The few limits of technology

- it is not possible to reproduce coloured images.

What to supply

- an image in EPS or DXF format of the subject to be reproduced, minimum line width and minimum distance between lines: 0.5 mm.

How to proceed

- deliver all the documentation to your area wholesaler/distributor, who will then forward it to Vimar.

Example of customised controls and buttons



Neve Up - White: backlighting controls and interchangeable buttons



Neve Up - Carbon matt: backlighting controls and interchangeable buttons

Library of standard symbols and wording (♦ symbols already on product catalogue visible in darkness)

ACCESSES												
	♦ S14.001	S14.002	S14.003	♦ S14.117	S14.094	S14.095	S14.096	S14.097	S14.098	S14.099	S14.100	
LIGHTING												
	S14.004	S14.005	S14.006	S14.007	S14.008	S14.009	S14.010	S14.011	S14.012	S14.013	S14.014	S14.015
	S14.018	S14.019	S14.020	S14.021	S14.022	S14.023	S14.024	S14.025	S14.026	S14.027	S14.028	♦ S14.029
	S14.032	S14.033	S14.034	S14.035	S14.036	S14.037	S14.038	S14.039	S14.040	S14.041	S14.042	S14.043
	S14.032	S14.033	S14.034	S14.035	S14.036	S14.037	S14.038	S14.039	S14.040	S14.041	S14.042	S14.043
	S14.046	S14.047	S14.048	S14.049	S14.050	S14.051	S14.052	S14.053	S14.054	S14.055	S14.056	
ROLLER SHUTTERS												
	S14.057	S14.058	♦ S14.059	♦ S14.060	S14.061	S14.062	S14.063	S14.064	S14.065	S14.066	S14.067	S14.068
	S14.071	S14.072	S14.073	S14.074	S14.075	S14.076	S14.077	S14.078	S14.079	S14.080	S14.081	S14.082
	S14.085	S14.086	S14.087	S14.088	S14.089	S14.090	S14.091	S14.092	S14.093	S14.101	S14.102	S14.103
	S14.105	S14.106	S14.107	S14.108	S14.109	S14.110	S14.111	S14.112				
CLIMATE												
	♦ S14.125	S14.126	♦ S14.126B	S14.127	S14.162							
IRRIGATION												
	S14.119	S14.120	S14.121	S14.122	S14.123	S14.124						
SCENARIOS												
	S14.128	S14.129	S14.130	S14.131	S14.132	S14.133	S14.134	S14.135	S14.136	S14.137	S14.138	S14.139
	S14.141	S14.142	S14.143	S14.144	S14.145	S14.146	S14.147	S14.148				
MUSIC AND AUDIO												
	S14.149	S14.150	S14.151	S14.152	S14.153	S14.154	S14.155	S14.156	S14.157	S14.158	S14.159	S14.160
	S14.149	S14.150	S14.151	S14.152	S14.153	S14.154	S14.155	S14.156	S14.157	S14.158	S14.159	S14.160
NUMBERS AND TEXTS	0	1	2	3	4	5	6	7	8	9	make up room	do not disturb
	S14.176	S14.177	S14.178	S14.179	S14.180	S14.181	S14.182	S14.183	S14.184	S14.185	S14.186	S14.187
	S14.189.EN	S14.190.EN	S14.191.EN	S14.192.EN	S14.193.EN	S14.194.EN	S14.195.EN	S14.196.EN	S14.197.EN	S14.198.EN	S14.199.EN	S14.200.EN
	S14.202	S14.203.EN										
HOTEL												
	S14.163	S14.164	S14.165	S14.166	S14.167	S14.168	S14.169	S14.170	S14.171	S14.172	S14.173	S14.174
	S14.163	S14.164	S14.165	S14.166	S14.167	S14.168	S14.169	S14.170	S14.171	S14.172	S14.173	S14.174

Smart card customization

The rear of the card can be customised on request, by providing a digital image of the subject in eps, tiff or jpg format.







# Beauty. Energy. Life


Since 1945 our energy is driven by passion and are engaged in supporting the evolution of living styles. The heart of our company, where we create, design, manufacture and test all our products, is in the North East of Italy. We continue manufacturing here at Marostica: from materials to shapes, colour combinations to electronic processes, we are distinguished by quality, style and technology that speak our language all over the world. A long tradition and history of success, a culture based on solid and true values.

## Research. Technology. Simplicity

To ensure the best of technology and design, 6% of our annual turnover is invested in R&D. This has allowed us over the years to lodge more than 180 patents worldwide, reflecting the attention of the great innovation like the little details that make every day life more simple and comfortable. We firmly believe that new ideas are created to be shared.


## Taking care of the process

Our manufacturing cycle is characterized by low environmental impact. We recycle 60% of the plastic material waste and most of the metal. We only use water-based paints or UV curing. We are replacing the electroplating bath with the innovative and more environmentally friendly MSD process that eliminates any type of harmful emissions.

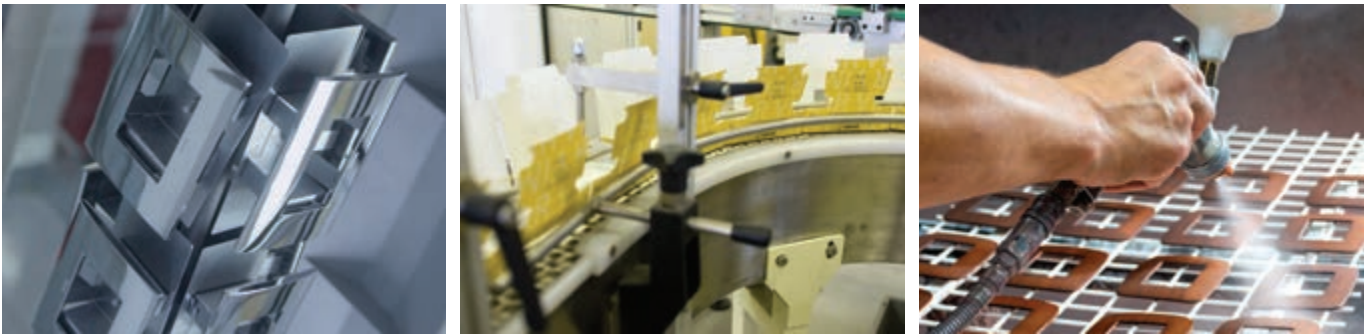

## SICURY patent

On 15 March 1968 we patented our idea for the SICURY shutter, an essential device for ensuring the safety of electrical systems and protecting sockets, by preventing users from making involuntary contact with live parts. And since we firmly believe that new ideas are created to be shared, we decided to grant all the operators in the industry the right to use our patent free of charge, making SICURY a market standard that has been making the lives of children and their parents a little safer for the past 50 years.

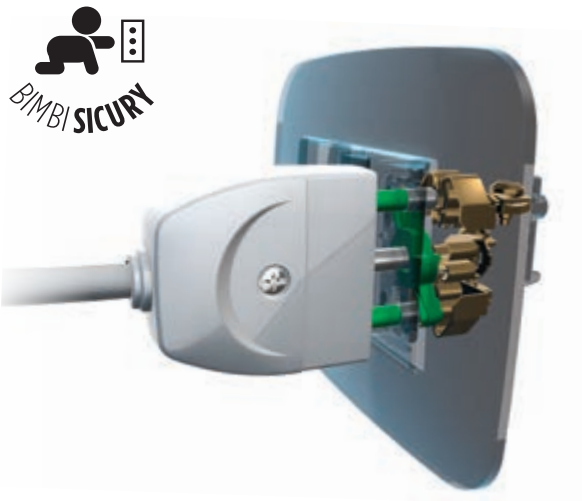





**Energia Positiva.** Insieme

