


SPC FLOORING

Waterproof Rigid Core Vinyl Tiles





OWNMANTM
GROUP OF COMPNIES

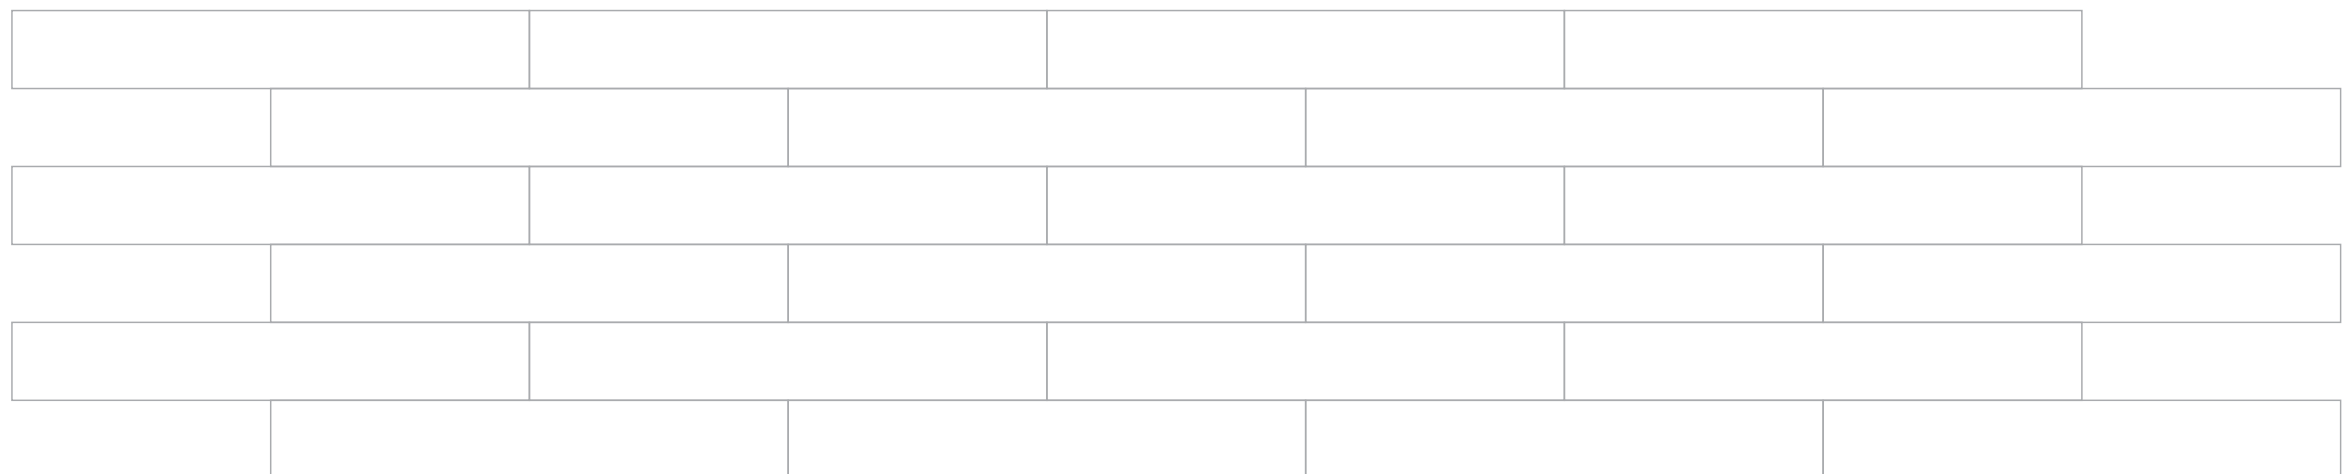


NEW COLLECTION 2026

Why OWNMAN SPC Flooring?

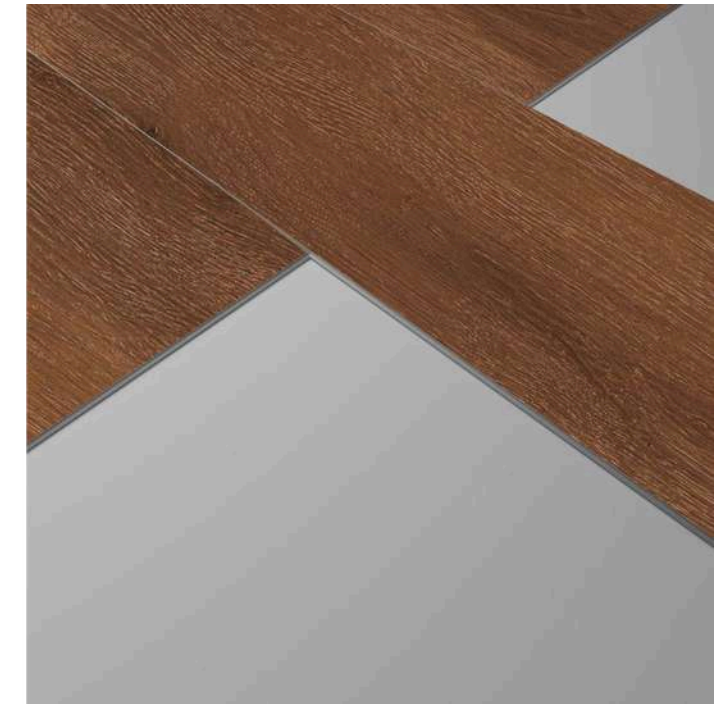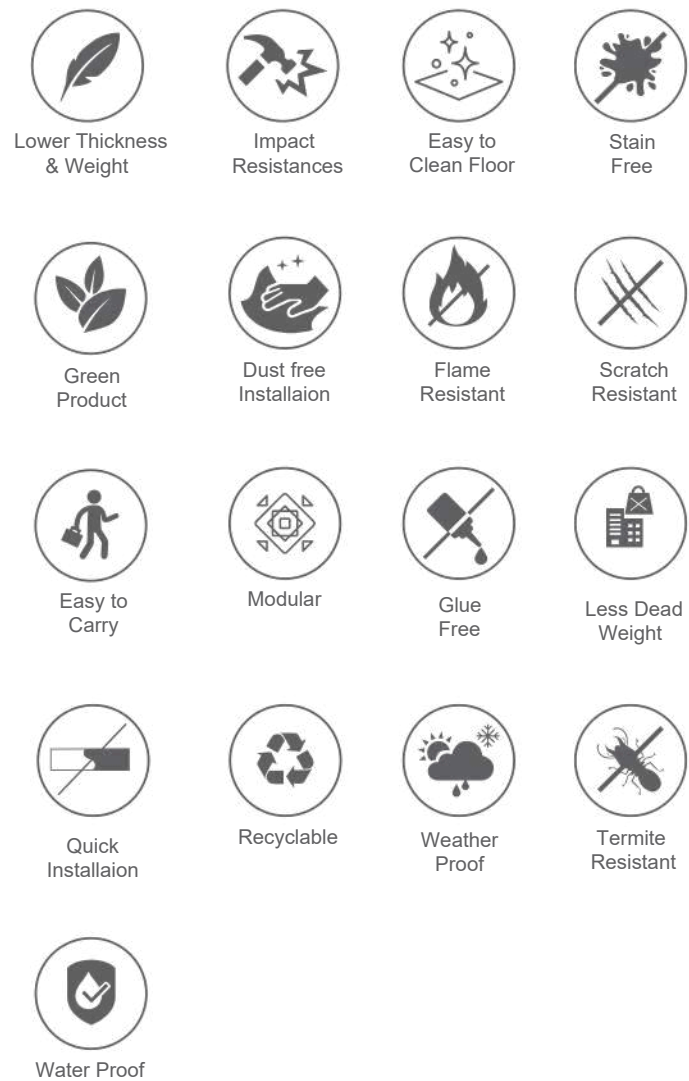


CLICK TILE

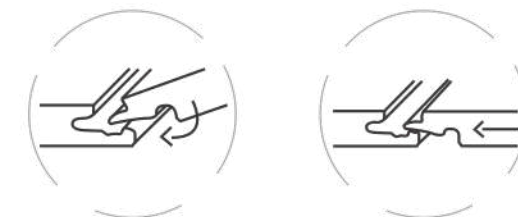

Easy & Hassle Free Installation



Structure

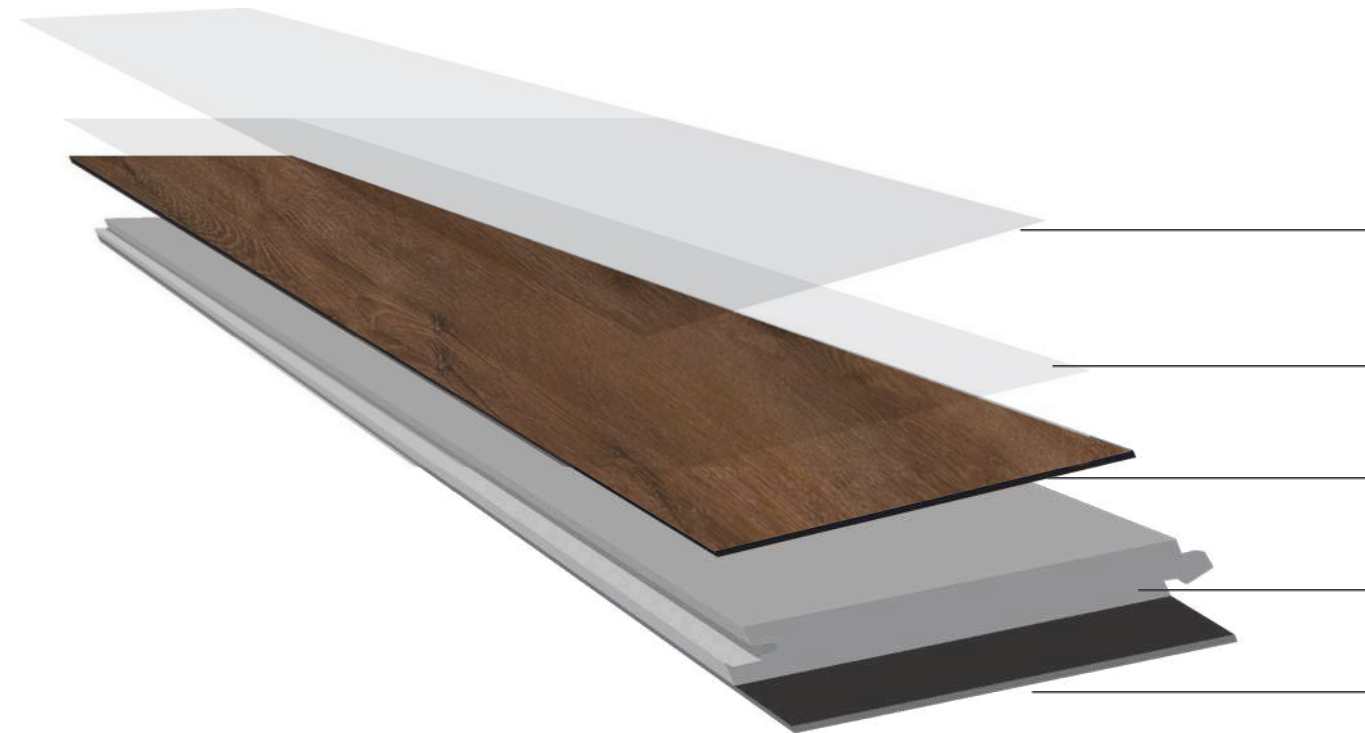

UV Coating
Reduce fading to sun light near window or any other indoor environment

Wear Layer
Strong wear-resistance for foot trac and make the surface scratch resistance.

Decor Film
A design layer of high-resolution photo of real wood that is reproduced with sophisticated printing techniques.

SPC Core Sheet
primary layer of the SPC structure

Underlayment
Effective sound reduction and cushioning incorporates a moisture barrier and mold repellent



ARTISAN



181x1220x5mm






Design :
ARTISAN

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

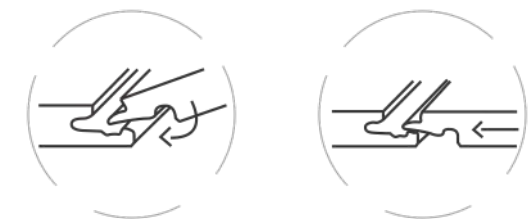

Easy & Hassle Free Installation







ASPEN



181x1220x5mm






Design :
ASPEN

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

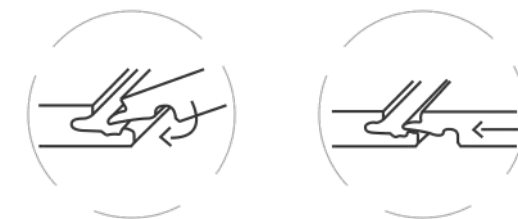

Easy & Hassle Free Installation







BALBOA



181x1220x5mm






Design :
BALBOA

Size :
181x1220mm


Thickness :
5mm



CLICK TILE

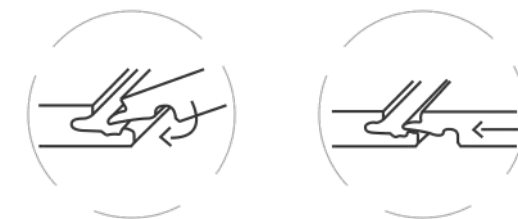

Easy & Hassle Free Installation

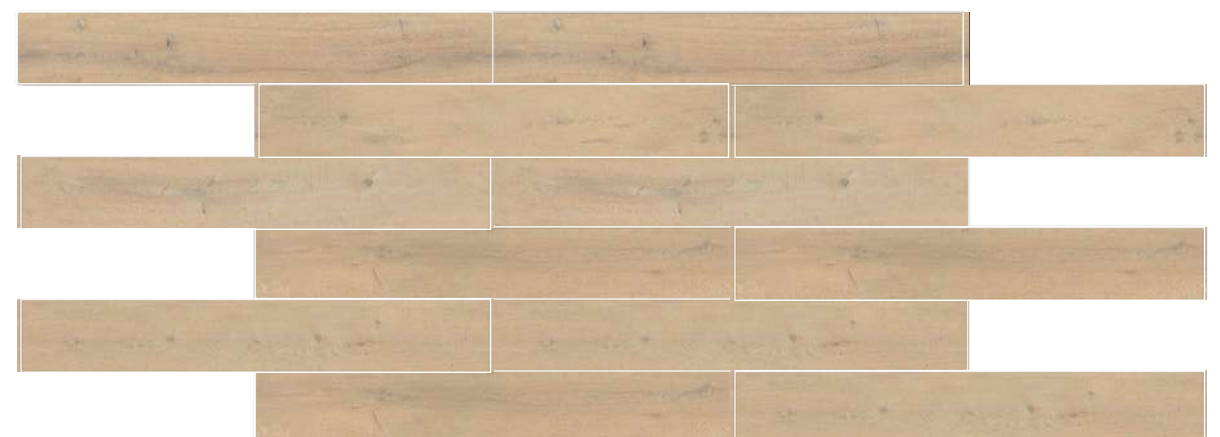





BARLEY



181x1220x5mm






Design :
BARLEY

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

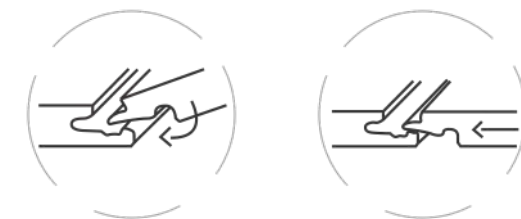

Easy & Hassle Free Installation








BERGAMO



181x1220x5mm

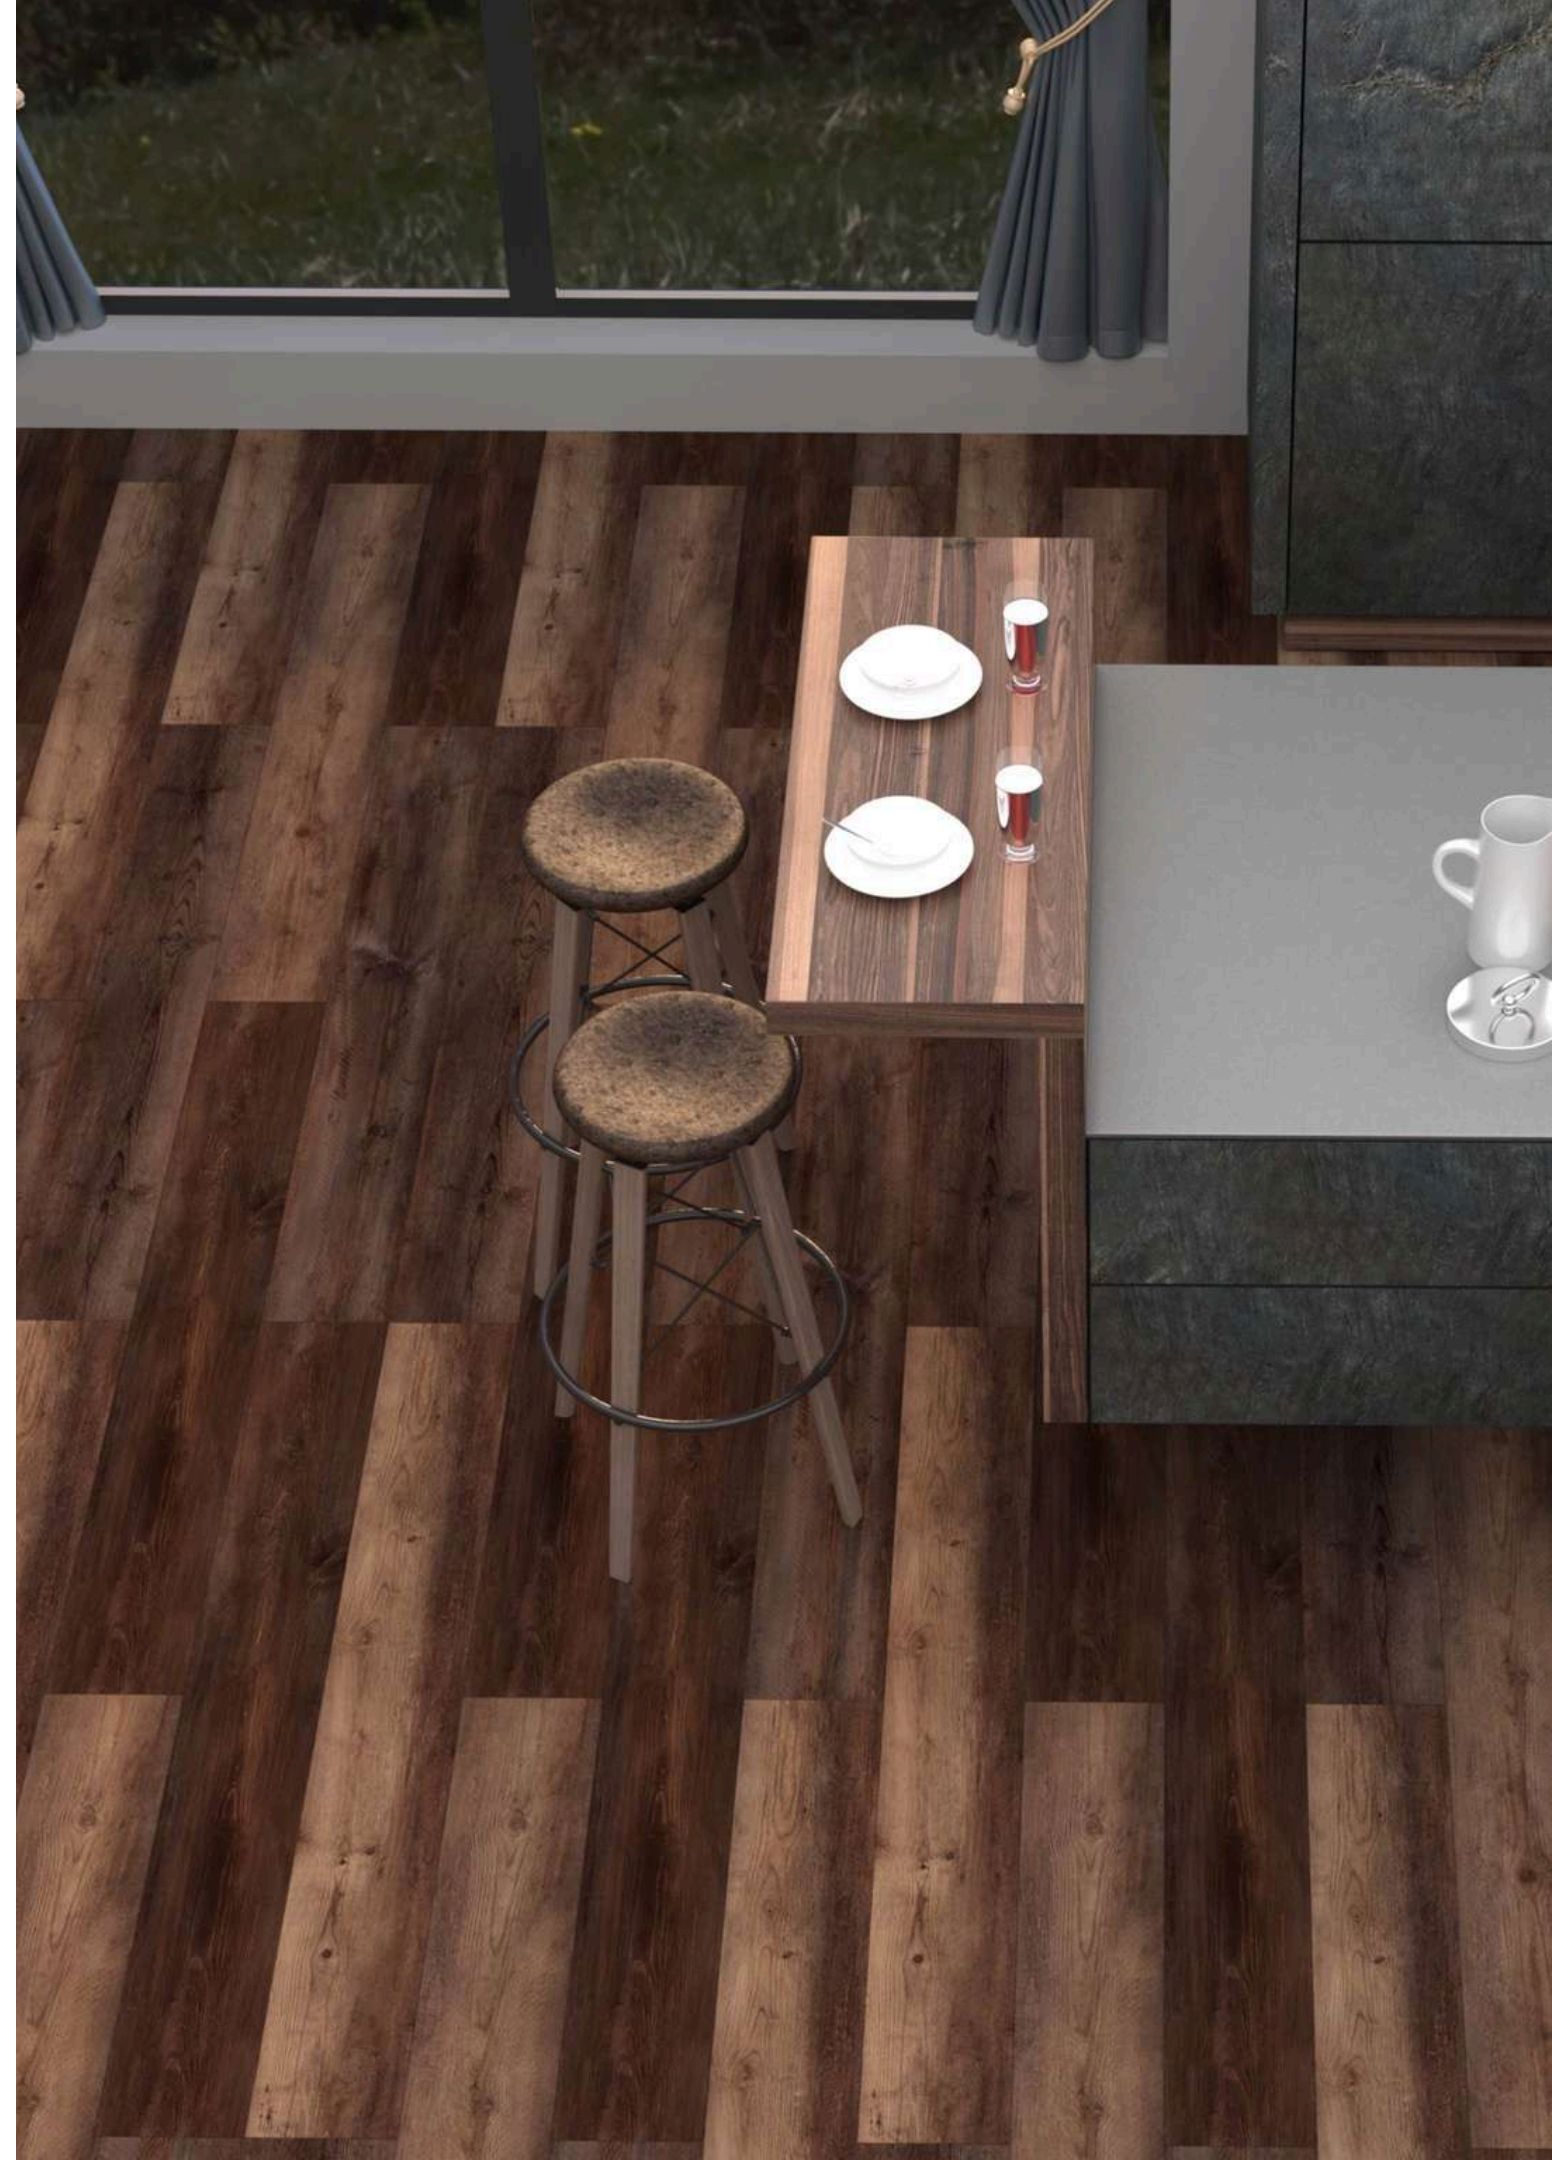




Design :
BERGAMO

Size :
181x1220mm


Thickness :
5mm



CLICK TILE

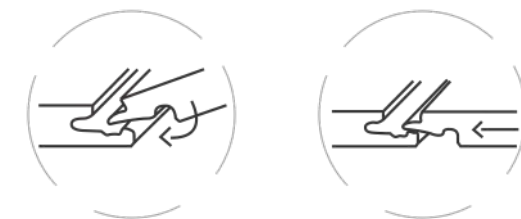

Easy & Hassle Free Installation

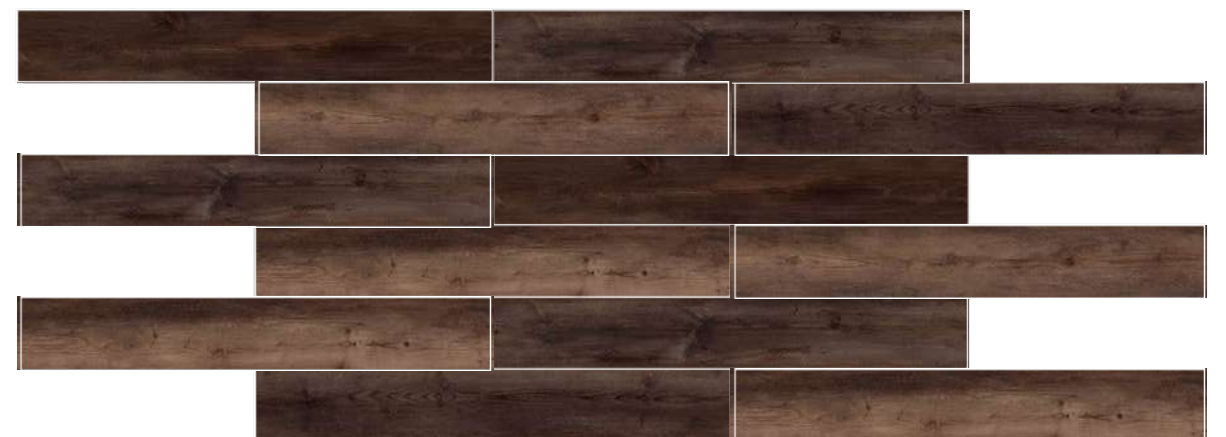



BIRCHWOOD



181x1220x5mm






Design :
BIRCHWOOD

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

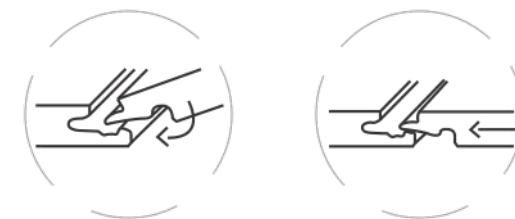

Easy & Hassle Free Installation







BLONDE



181x1220x5mm






Design :
BLONDE

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

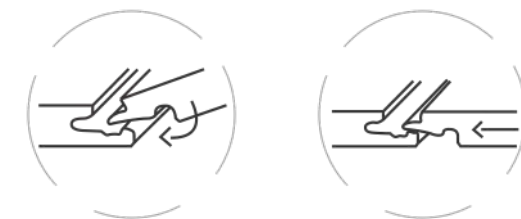

Easy & Hassle Free Installation







BRICOLA



181x1220x5mm






Design :
BRICOLA

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

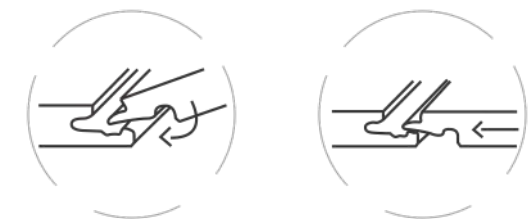

Easy & Hassle Free Installation







CAMBRIA



181x1220x5mm






Design :
CAMBRIA

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

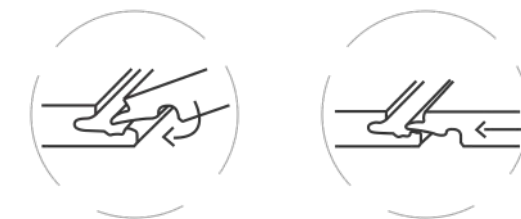

Easy & Hassle Free Installation







CASTLE



181x1220x5mm






Design :
CASTLE

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

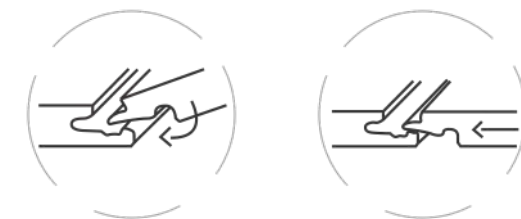

Easy & Hassle Free Installation







CENIZA



181x1220x5mm






Design :
CENIZA

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

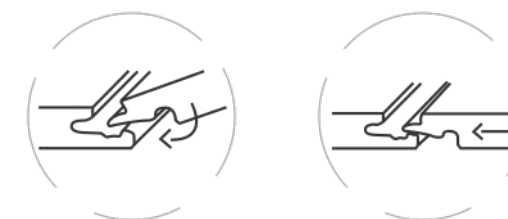

Easy & Hassle Free Installation







CEYLON



181x1220x5mm






Design :
CEYLON

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

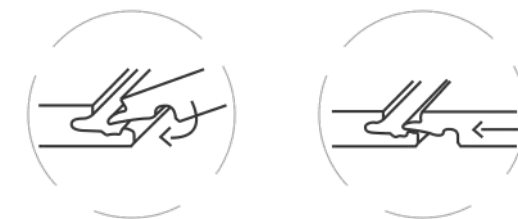

Easy & Hassle Free Installation





CONSTANO



181x1220x5mm






Design :
CONSTANO

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

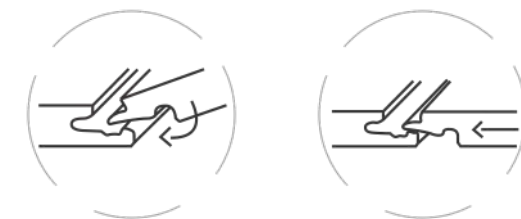

Easy & Hassle Free Installation







DOVER



181x1220x5mm






Design :
DOVER

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

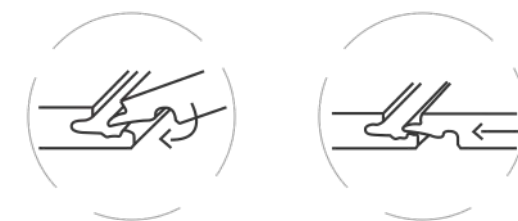

Easy & Hassle Free Installation







DRIFTWOOD



181x1220x5mm






Design :
DRIFTWOOD

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

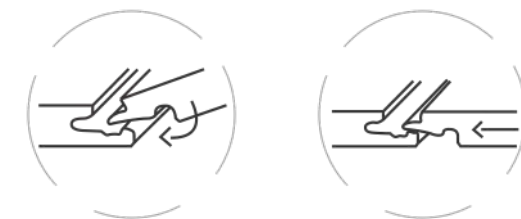

Easy & Hassle Free Installation







FOREST



181x1220x5mm






Design :
FOREST

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

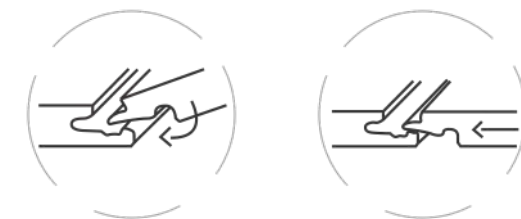

Easy & Hassle Free Installation







HABANA



181x1220x5mm






Design :
HABANA

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

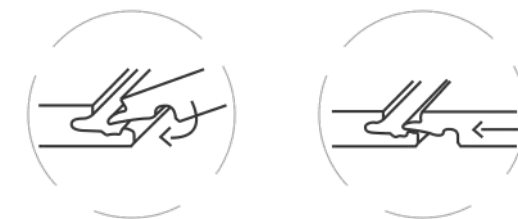

Easy & Hassle Free Installation







HICKORY



181x1220x5mm






Design :
HICKORY

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

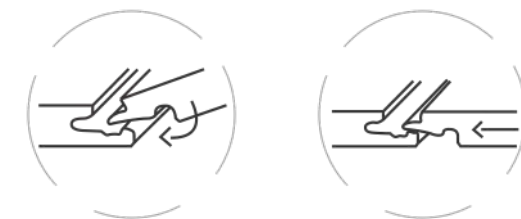

Easy & Hassle Free Installation







LEGNO



181x1220x5mm






Design :
LEGNO

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

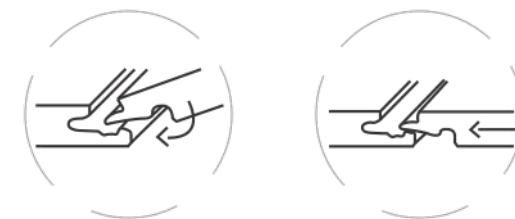

Easy & Hassle Free Installation







LYPTUS



181x1220x5mm






Design :
LYPTUS

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

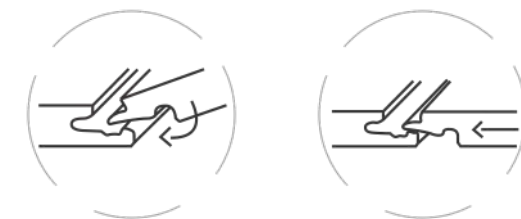

Easy & Hassle Free Installation





MAHOGANY



181x1220x5mm






Design :
MAHOGANY

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

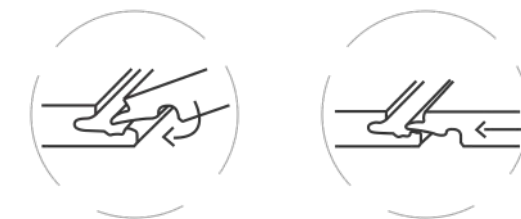

Easy & Hassle Free Installation







MINK



181x1220x5mm






Design :
MINK

Size :
181x1220mm


Thickness :
5mm



CLICK TILE

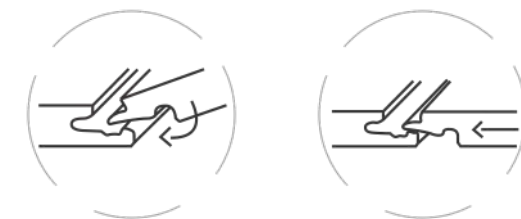

Easy & Hassle Free Installation

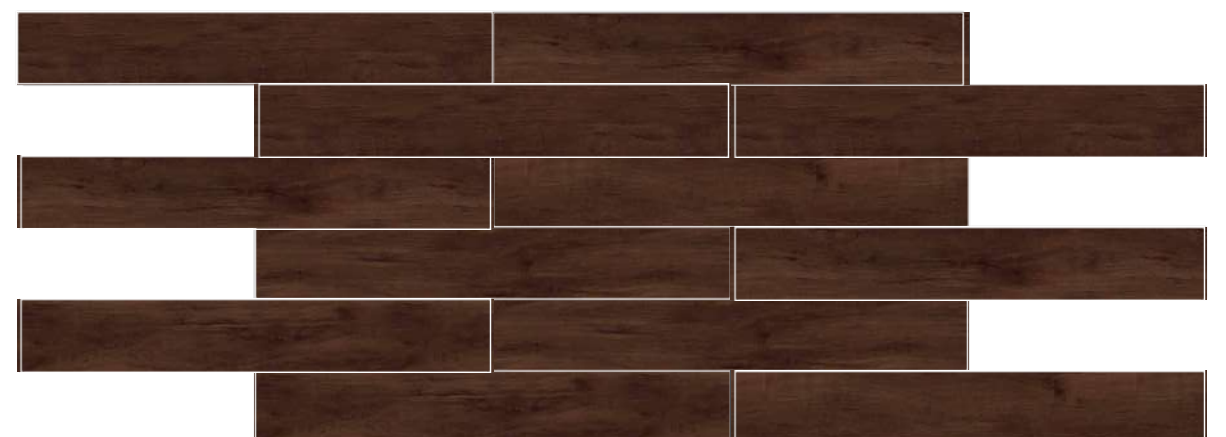





MISSOURI



181x1220x5mm






Design :
MISSOURI

Size :
181x1220mm


Thickness :
5mm



CLICK TILE

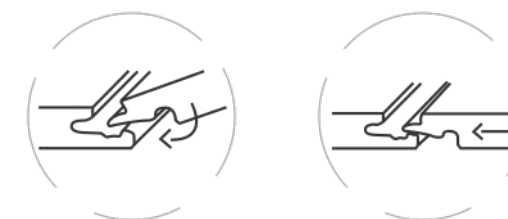

Easy & Hassle Free Installation

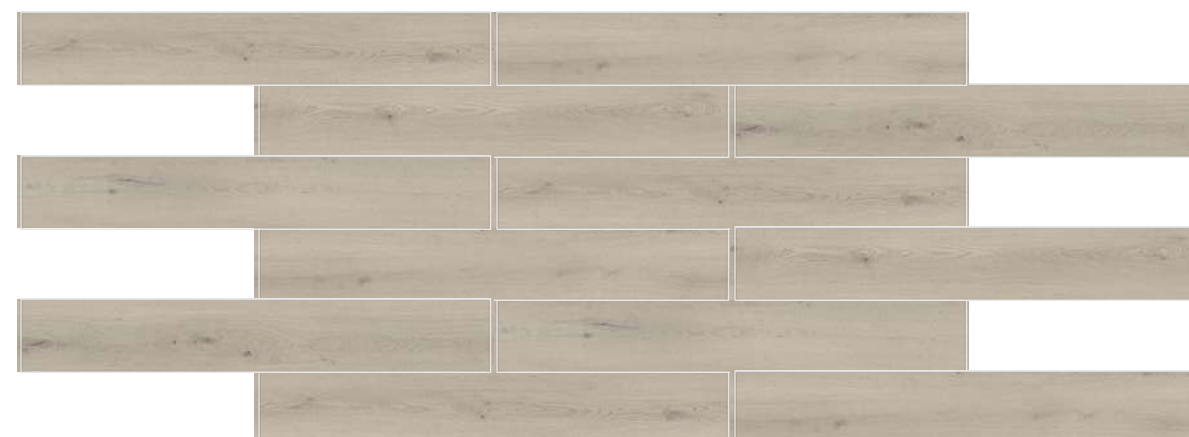





NORDIC



181x1220x5mm






Design :
NORDIC

Size :
181x1220mm


Thickness :
5mm



CLICK TILE

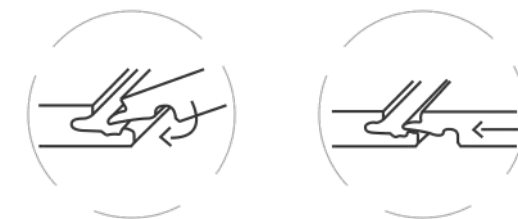

Easy & Hassle Free Installation

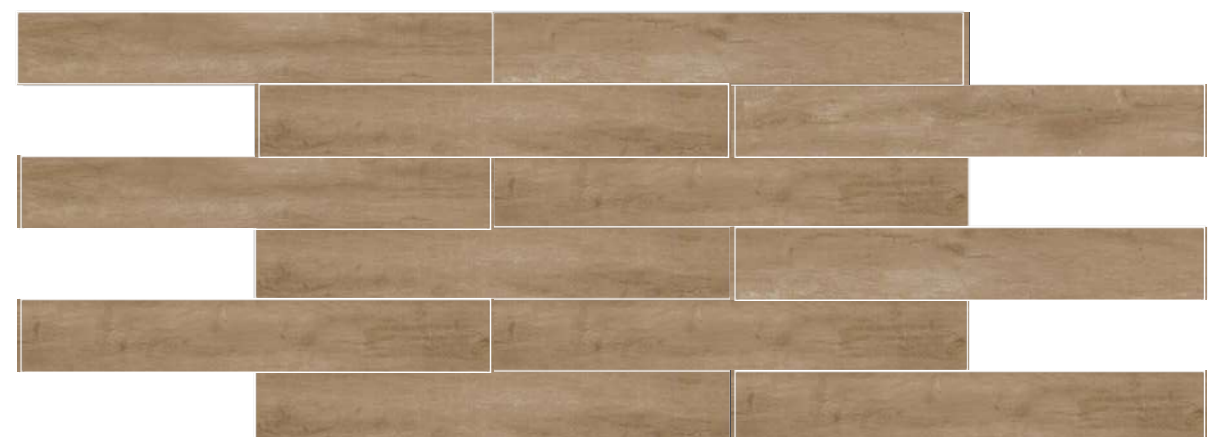





NOVELA



181x1220x5mm






Design :
NOVELA

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

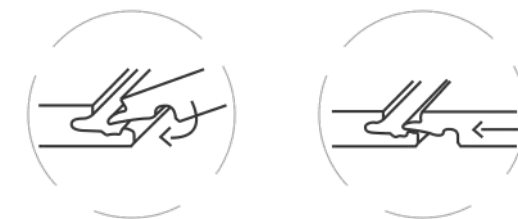

Easy & Hassle Free Installation








ROBLE



181x1220x5mm



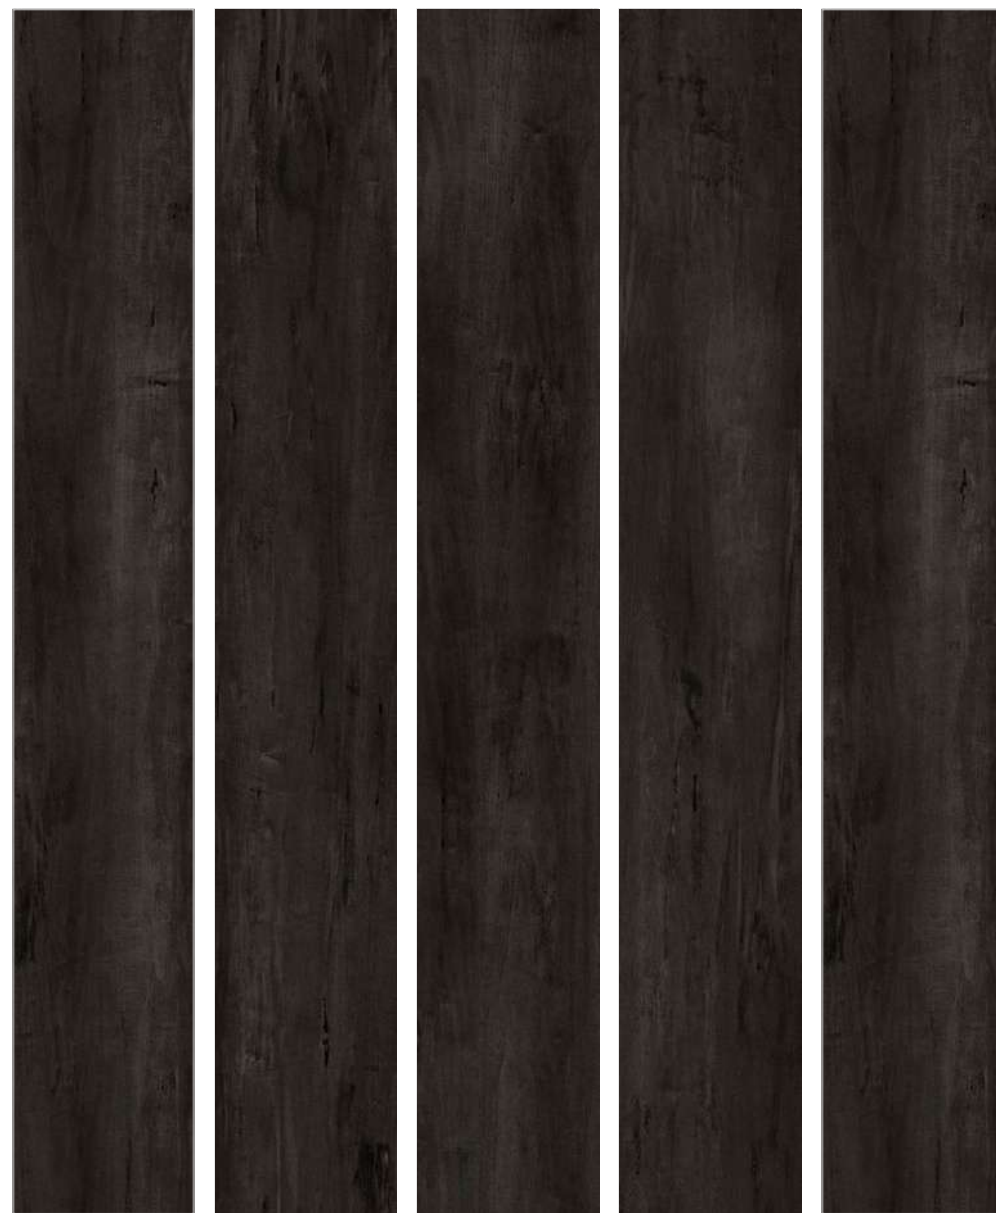


Design :
ROBLE

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

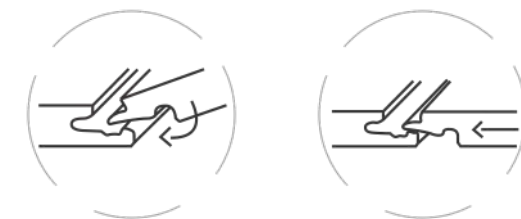

Easy & Hassle Free Installation







SANDLE



181x1220x5mm






Design :
SANDLE

Size :
181x1220mm


Thickness :
5mm



CLICK TILE

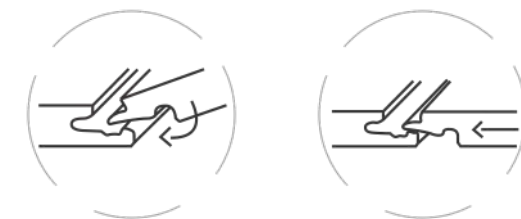

Easy & Hassle Free Installation

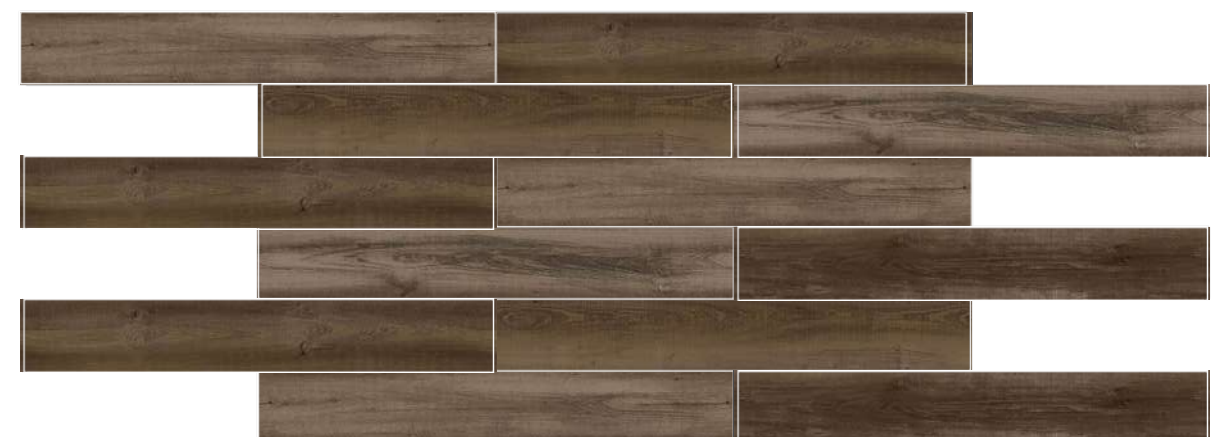





UMBER



181x1220x5mm






Design :
UMBER

Size :
181x1220mm


Thickness :
5mm



CLICK TILE

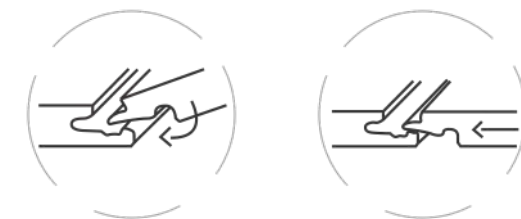

Easy & Hassle Free Installation

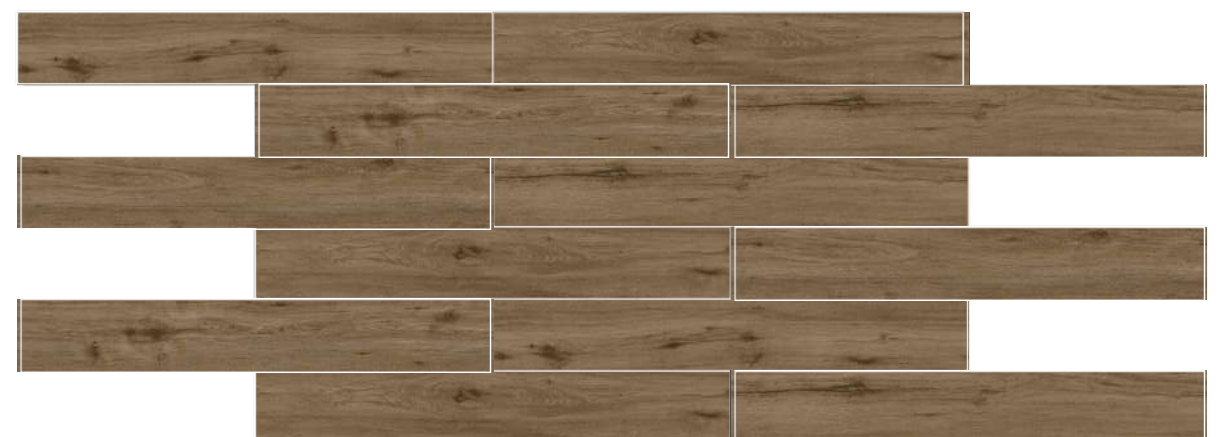





URBAN



181x1220x5mm






Design :
URBAN

Size :
181x1220mm


Thickness :
5mm



CLICK TILE

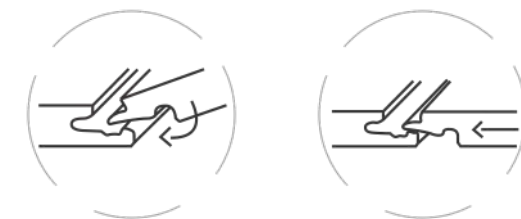

Easy & Hassle Free Installation

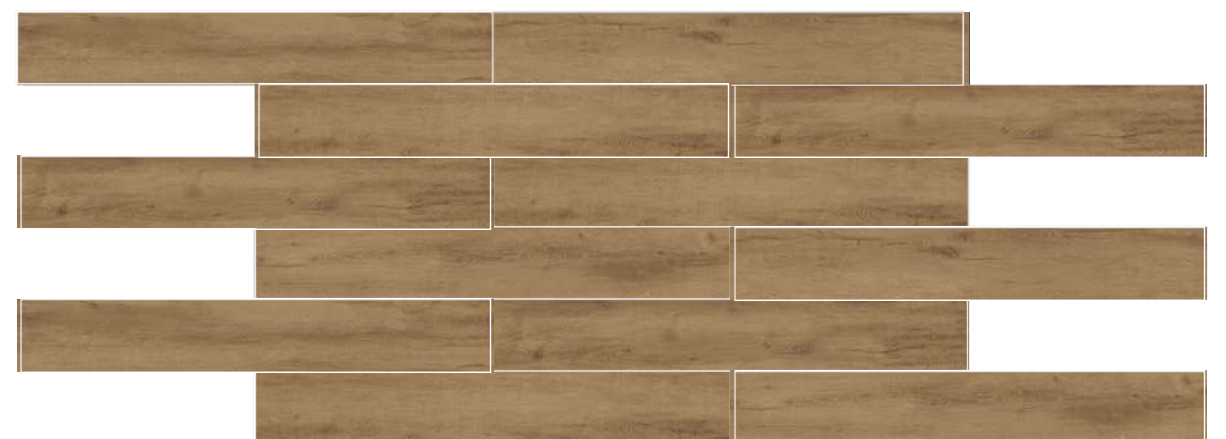



SPC Flooring Technical Data

CHARACTERISTICS	STANDARDS			
	EN	Result	ASTM	Result
Size	EN 427	Pass	ASTM F536	Pass
Overall Thickness	EN 428	Pass	ASTM F36	Pass
Wear Layer Thickness	EN 429	Pass	ASTM F410	Pass
Dimension Squareness and Straightness	EN 427	Pass Squareness:0.18mm Straightness:0.07mm		
Chemical Resistance	EN 423	Pass	ASTM F925, ASTM F1344	Pass
Colour Fastness to Artificial Light	EN20105:B02 Method A	Pass, ≥ Grade 6	ASTM F1515	Pass
Heat Stability by Color Change			ASTM F1514	Pass
Castor Chair Suitabiliy	EN 425	Pass		
Residual Indentation	EN 433	Pass,0.06mm	ASTM F1914, ASTM F970	Pass
Abrasion Group	EN 660-1/2	Group T	ASTM F510, ASTM D3384	Pass
Impact Resistance			ASTM F1265, ASTM D2632	Pass
Dimensional Stability	EN 434	Pass	ASTM F2199	Pass, 0.1%
Sound Reduction	ENIS0717-2(Δ Lw)	2 dB		
Flexibility	EN 435 Method A	Pass	ASTM F137	Pass
Slip Resistance	EN 13893	Class DS	ASTMD2047-93	Pass
Electrical Resistance	EN 1081 Method C	Pass	ASTM F150-06	Pass
Thermal Resistance	EN 12664	Pass		
Toxic Element Test	EN 71-3	Pass. Not toxic. Does not contain heavy metal and formaldehyde		
Behaviour to Fire	ENIS011925-2 EN13501-1 EN ISO 9239-1	Bf1-S1	ASTM E648-06	Pass/Class1
Smoke Density			ASTM E662	Pass,<450

Product Size & Packing Details


Size	1220 x 181 mm
SPC Core Thickness	4.00 mm to 6.00 mm
Wearlayer	0.30 mm (12mil) & 0.50 mm (20mil)
IXPE Underlayment	1 mm, 1.5 mm & 2 mm



OWNMAN GROUP OF COMPANIES

Corporate Head Office :
Office NO. 324, Shree Dariyalal Square,
Near Bhaktinagar Circle, Sanala Bypass,
Morbi 363641. Gujarat, India.

Email : info@ownmangroup.com | **Contact :** +91 9081231353

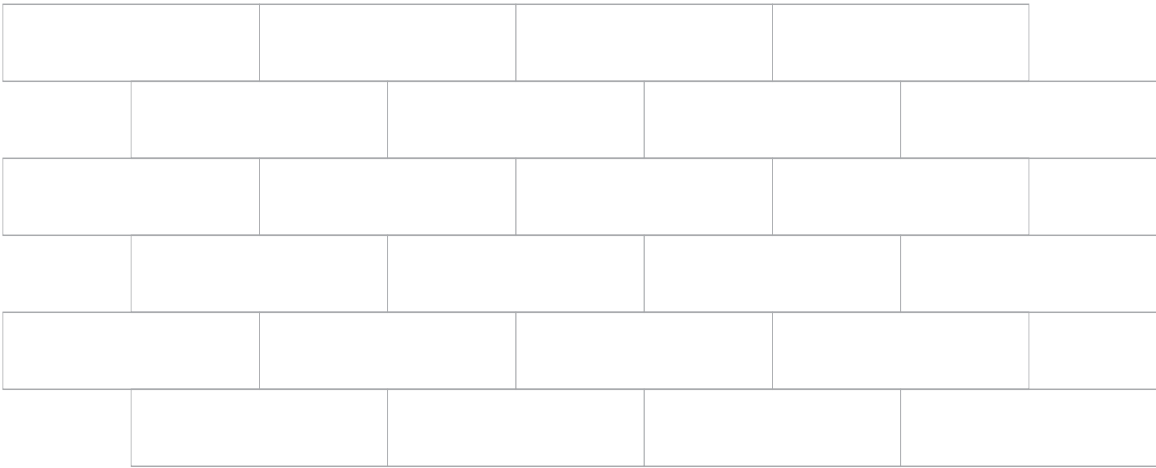

www.ownmangroup.com