



Accessories &gt; Screw &gt; Self Drilling Stitching Screw &gt; SFZ-08551

# SFZ-08551

-EPDM Bonded Sealing Washer-



## Application


Roofing / Flashing



## Technical parameters

Drive Type	Hex Washer Head	SW8
Screw Diameter	D (mm)	5.5
Drilling capacity	T (mm)	DP1 2x0.5 to 2x1.25
Material	Carbon Steel	
Thread Type	Full Thread	BSD-TPI (1.81 mm)
Surface	Zinc Plated	


## Technical drawings

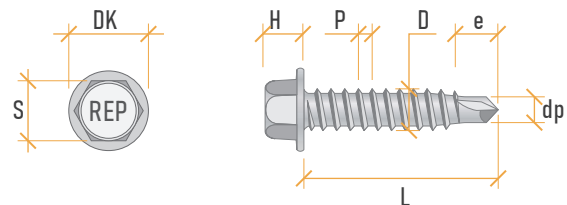

Hex Washer Head Stitching Screw	Head Diameter		Hex Width		Head Thickness		Thread Outer Diameter		Thread Pitch	Drill Point Diameter		Drill Point Length		Total Length	
	DK		S		H		D		P	dp		e		L	
	min	max	min	max	min	max	min	max	ref	min	max	min	max	min	max
M 5.5 x 25	10	11	7.78	8	4.8	5.4	5.35	5.55	1.81	3.3	3.4	4	5	24	26

## EPDM Bonded Sealing Washer

High-quality bonded washer with 1.0 mm Zinc Plated backing and 3.0 mm gray EPDM rubber layer, designed to provide excellent sealing performance, superior resistance to water, UV, ozone, and weather conditions, making it ideal for roofing, cladding, and steel structure applications.



Bonded Sealing Washer	Outer Diameter	Metal Part Material	Metal Thickness	Rubber Material	EPDM Color	EPDM Thickness	Weather / UV Resistance	Water Sealing
	Φ 19 mm	Zinc Plated	1 mm	EPDM	GREY	2.8 mm	Excellent	Excellent