

HDG-24T/HDG-36T

Gas Thermostatic Griddle



Features

- Key components have CSA / ETL certificate.
- 4" adjustable stainless steel legs can be removed when packing to reduce transportation cost.
- Equipped with regulator.
- Gas convert kit to exchange the gas type.
- Adjustable thermostat from 200°F-450°F.
- Medium Duty.

HDG-24T




Size(W*D*H): 609.8X738X334.5mm
 Size(W*D*H): 24.01"X29.06"X13.17"
 N.W. : 90.5kg G.W. : 110.5kg
 Gas consumption(m³/h):
 NG: 1.578 / LPG: 0.68

Quantity of Burners: 2
 Quantity of Controls: 2
 Cooking Surface: 23.86"X22.21"
 Plate Thickness: 1"
 Power(BTU): 30,000X2

HDG-36T

Size(W*D*H): 909.8X770.8X334.5mm
 Size(W*D*H): 35.82"X30.34"X13.17"
 N.W. : 129.5kg G.W. : 156kg
 Gas consumption(m³/h):
 NG: 2.367 / LPG: 1.02

Quantity of Burners: 3
 Quantity of Controls: 3
 Cooking Surface: 35.67"X22.21"
 Plate Thickness: 1"
 Power(BTU): 30,000X3

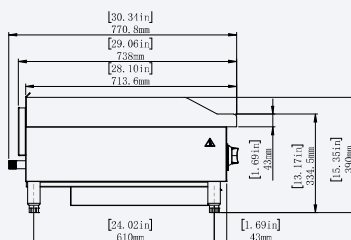

* All above parameters for reference only, take practicality as standard.