



HDG-48T/HDG-60T

Gas Thermostatic Griddle

Features

- Key components have CSA / ETL certificate.
- 4" adjustable stainless steel legs can be removed when packing to reduce transportation cost.
- Equipped with regulator.
- Gas convert kit to exchange the gas type.
- Adjustable thermostat from 200°F-450°F.
- Medium Duty.

HDG-48T




Size(W*D*H): 1210.4X738X334.5mm
 Size(W*D*H): 47.65"X29.06"X13.17"
 N.W. : 165kg G.W. : 196kg
 Gas consumption(m³/h):
 NG: 3.156 / LPG: 1.36

Quantity of Burners: 4
 Quantity of Controls: 4
 Cooking Surface: 47.48"X22.21"
 Plate Thickness: 1"
 Power(BTU): 30,000X4

HDG-60T

Size(W*D*H): 1510.4X770.8X334.5mm
 Size(W*D*H): 59.46"X30.34"X13.17"
 N.W. : 204.5kg G.W. : 242.5kg
 Gas consumption(m³/h):
 NG: 3.946 / LPG: 1.7

Quantity of Burners: 5
 Quantity of Controls: 5
 Cooking Surface: 59.29"X22.21"
 Plate Thickness: 1"
 Power(BTU): 30,000X5

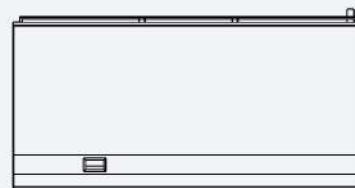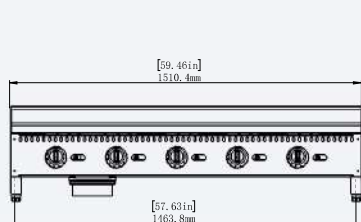

* All above parameters for reference only, take practicality as standard.