


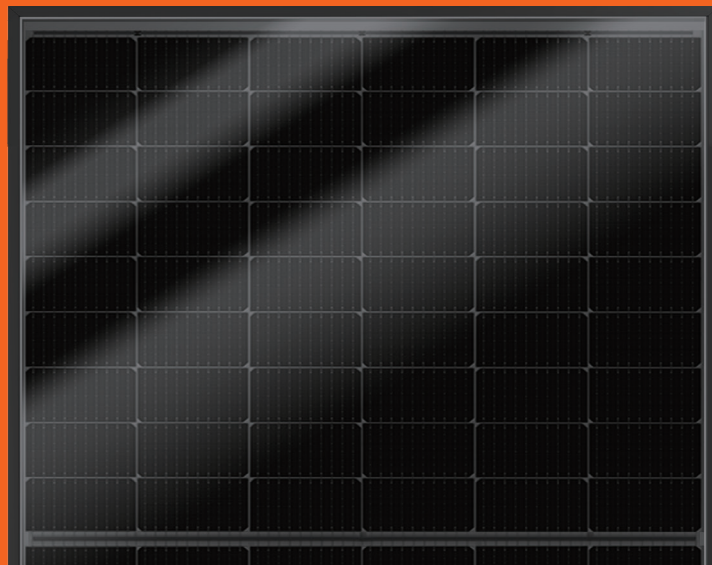

N-Type

LIGHTWEIGHT HIGH-STRENGTH FULL BLACK N Type SOLAR MODULE 420-440W

22.5%

Module efficiency up to

Features



Lightweight

5.5kg/m², 50% lighter than conventional glass module
Perfect for rooftops with limited load capacity



Excellence Durability

Meet IEC61215 standard requirements
Excellent performance in high temperature and humidity environment



High Efficiency

Excellent light transmission, 3% more power output compared to similar products with the same dimension



High Strength

Fully tempered glass of high strength on the first layer
Good hail resistance, UV resistance, corrosion resistance, capacity resistance performance



Safe and Reliable

Special frame structure Lowest microcracks and hot-spot effect, Higher LCOE



Easy Installation


Fast installation with support bracket
Easy to install and remove and replace

Reinsurance Coverage for 25 Years



Insured by LLOYD'S

LLOYD'S

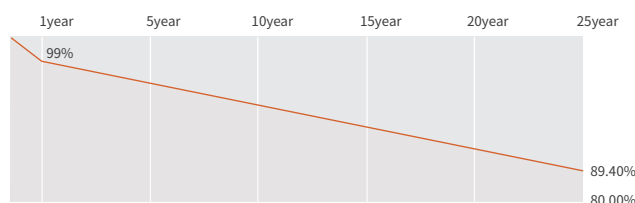

※Within the first year from the date of installation and normal operation, the output power shall not be less than 99% of the product's minimum output power as set forth in the specifications, Afterwards, maximum 0.4% output decrease per year. After 25 years, the product's output power shall not be less than 89.4% of its minimum output power as set forth in the specifications.

Comprehensive Qualifications & Certifications

★ ISO 9001: 2015 Quality Management System

★ ISO 14001: 2015 Environment Management System

★ ISO 45001: 2018 Occupation Health Safety Management System



Electrical Characteristics at Standard Test Conditions(STC)

Spec/Model	Unit	SST420AH5T	SST425AH5T	SST430AH5T	SST435AH5T	SST440AH5T
Max-Power(Pm)	W	420	425	430	435	440
Power Tolerance	W	0~+5				
Max-Power Voltage(Vm)	V	31.97	32.15	32.33	32.51	32.69
Max-Power Current(Im)	A	13.14	13.22	13.30	13.38	13.46
Open-Circuit Voltage(Voc)	V	38.46	38.59	38.72	38.85	38.98
Short-Circuit Current(Isc)	A	14.09	14.17	14.25	14.33	14.41
Effective Module Efficiency(ηm)	%	21.6	21.8	22.1	22.3	22.5
STC: AM=1.5, Irradiation 1000W/m², Module Temperature 25℃ Power Tolerance ±3%						

Electrical Characteristics at Nominal Module Operating Temperature (NMOT)

Spec/Model	Unit	SST420AH5T	SST425AH5T	SST430AH5T	SST435AH5T	SST440AH5T
Max-Power(Pm)	W	323	326	329	333	337
Max-Power Voltage(Vm)	V	30.00	30.10	30.20	30.40	30.50
Max-Power Current(Im)	A	10.75	10.82	10.89	10.96	11.04
Open-Circuit Voltage(Voc)	V	36.60	36.70	36.80	36.90	37.00
Short-Circuit Current(Isc)	A	11.35	11.42	11.49	11.55	11.62
NMOT: Irradiation 800W/m², Ambient temperature 20℃, Wind Speed 1m/s						

Temperature Coefficient

Nominal Module Operating Temperature	43±2℃
Temperature coefficient of Pmax	-0.35%/℃
Temperature coefficient of Voc	-0.26%/℃
Temperature coefficient of Isc	0.048%/℃

Operating Conditions

Max. system voltage	DC1500V(IEC)
Max. series fuse rating	25A
Operating temperature range	-40℃~+85℃

Mechanical Characteristics

Installation Module Dimension (L×W×H)	1720mm×1132mm×30mm
Weight	10.8 kg
Glass Type	High Transmittance Tempered Glass
Frame	Anodized Aluminum Alloy / Black
Cell (quantity / material / type / dimensions)	108(6x18) / N Type Mono/ 182*91mm
Junction box(protection degree)	IP68
Cable (length/cross-section area)	Customizable / 4mm²
Connector	MC4 Compatible
Max Load	+3600Pa/-2400Pa
Max Allowable Hail Load	φ25mm hail, speed at 23 m/s


Package

Transportation	Container Size	Quantity(pcs)	Quantity(per pallet)
Container	40'HQ	936	36
Platform Trailer	13m	1008	36
Platform Trailer	17.5m	1728	36

Module Size

I-V Curve

I-V Curves of SST435AH5T at different irradiance

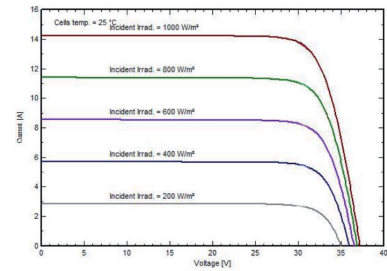

I-V Curves of SST435AH5T at different cell temperature

