





Bandes OptiTrack

Trains de Chenilles




Rubber Tracks for Large-Power Agricultural Machinery
大功率农机履带

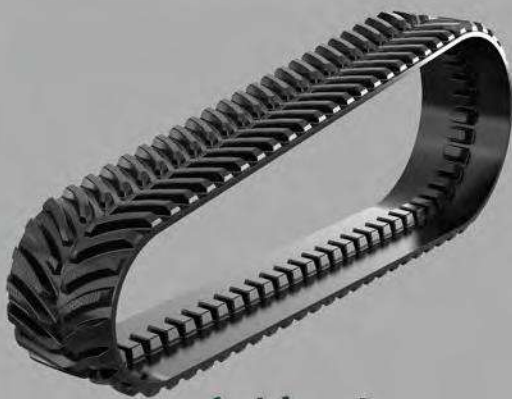

摩擦型/Friction

品牌 Brand	型号 Model	泰特代号 TAITE Partnumber	宽度 Width in (mm)	长度 Length in (mm)	节距 Pitch Length in	导向块数量 Guide Lug Qty	驱动类型 Driving type
CAT Challenger	35/45/55	T457A-M01P137	18"(457)	318"(8077)	6"	53	Friction
		T635A-M01P137	25"(635)				
		T762A-M01P137	30"(762)				
CAT Challenger	65/75/85/95	T635A-M02P137	25"(635)	342"(8687)	6"	57	Friction
		T762A-M02P137	30"(762)				
		T915A-M02P137	36"(915)				
AGCO	MT700 Series (MT735/ 745/755/765/775)	T457A-M03P137	18"(457)	348"(8839)	6"	58	Friction
		T635A-M03P137	25"(635)				
		T762A-M03P137	30"(762)				
AGCO (FENDT)	AGCO MT700 Series (MT738/740/743) FENDT VARIO MT900 Series (938/940/943MT)	T457A-M031P137	18"(457)	360"(9144)	6"	60	Friction
		T635A-M031P137	25"(635)				
		T762A-M031P137	30"(762)				
AGCO	MT800	T762A-M04P137	30"(762)	396"(10058)	6"	66	Friction
		T915A-M04P137	36"(915)				
John Deere	8000T	T457A-M05P137	18"(457)	324 "(8230)	6"	54	Friction
		T635A-M05P137	25"(635)				
		T762A-M05P137	30"(762)				
John Deere	8RT	T457A-M06P137	18"(457)	354"(8992)	6"	59	Friction
		T635A-M06P137	25"(635)				
		T762A-M06P137	30"(762)				
John Deere	9000T	T762A-M07P137	30"(762)	378"(9601)	6"	63	Friction
		T915A-M07P137	36"(915)				
John Deere	9 RT (9430T/9530T/ 9630T and all 9RT model)	TF762A-M08P137	30"(762)	390"(9906)	6"	65	Friction
		TF915A-M08P137	36"(915)				
Claas	Terra Track	T635A-M09P137	25"(635)	264"(6706)	6"	44	Friction
		T762A-M09P137	30"(762)				
		T890A-M09P137	35"(890)				

Rubber Tracks for Large-Power Agricultural Machinery
大功率农机履带

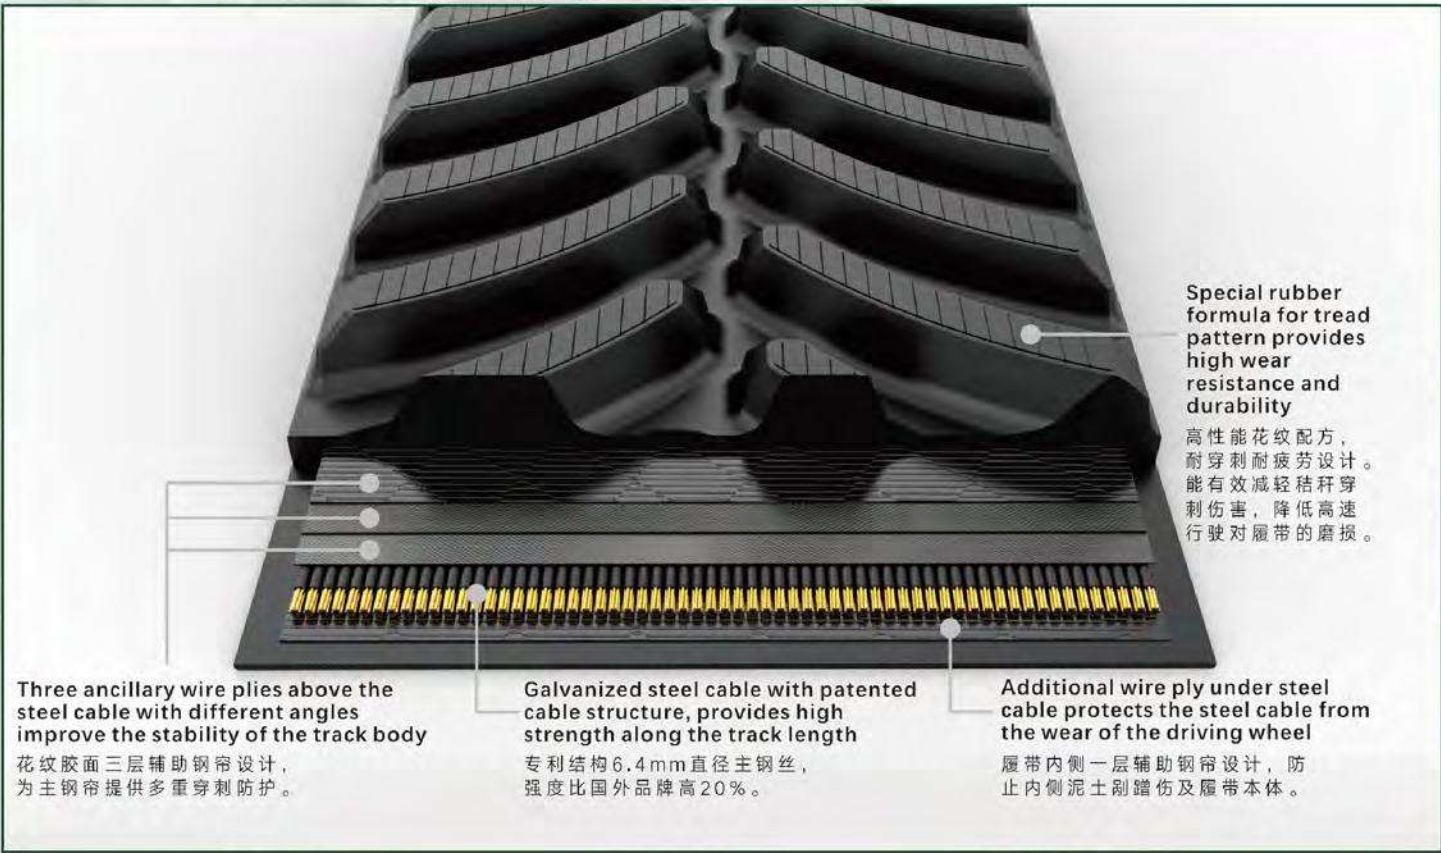

品牌 Brand	型号 Model	泰特代号 TAITE Partnumber	宽度 Width in (mm)	长度 Length in (mm)	节距 Pitch Length in	导向块数量 Guide Lug Qty	驱动类型 Driving type
CNH	Case STX Quadtrac/Axial Flow Combine	TP762xP1Ax42	30" (762)	252" (6401)	6"	42	Positive
CNH	Case STX Quadtrac/Axial Flow Combine	TP915xP1Ax42	36" (915)	252" (6401)	6"	42	Positive
CNH	9300 Series	TP762xP1Ax39	30" (762)	234" (5944)	6"	39	Positive
CNH	9300 Series	TP915xP1Ax39	36" (915)	234" (5944)	6"	39	Positive
CNH	Case Steiger/Magnum Rowtrac, New Holland T8 SmartTrax	TP457xP1Bx44	18" (457)	264" (6706)	6"	44	Positive
CNH	Case Steiger/Magnum Rowtrac, New Holland T8 SmartTrax	TP610xP1Bx44	24" (610)	264" (6706)	6"	44	Positive
CNH	Case Steiger/Magnum Rowtrac, New Holland T8 SmartTrax	TP762xP1Bx44	30" (762)	264" (6706)	6"	44	Positive
CNH	Case Axial Flow Combine/New Holland CR, CX Combine	TP610xP1Ax44	24" (610)	264" (6706)	6"	44	Positive
CNH	Case Axial Flow Combine/New Holland CR, CX Combine	TP762xP1Ax44	30" (762)	264" (6706)	6"	44	Positive
CNH	Case Axial Flow Combine/New Holland CR, CX Combine	TP915xP1Ax44	36" (915)	264" (6706)	6"	44	Positive
John Deere	9RX Wide	TP762xP1Cx45	30" (762)	270" (6858)	6"	45	Positive
John Deere	9RX Wide	TP915xP1Cx45	36" (915)	270" (6858)	6"	45	Positive
John Deere	9RX Narrow	TP457xP1Dx45	18" (457)	270" (6858)	6"	45	Positive
John Deere	9RX Narrow	TP610xP1Dx45	24" (610)	270" (6858)	6"	45	Positive
John Deere	8RX Front	TP457xP1Dx35	18" (457)	210" (5334)	6"	35	Positive
John Deere	8RX Front	TP610xP1Dx45	24" (610)	270" (6858)	6"	45	Positive
John Deere	8RX Rear	TP457xP1Dx45	18" (457)	270" (6858)	6"	45	Positive
John Deere	8RX Rear	TP610xP1Dx45	24" (610)	270" (6858)	6"	45	Positive
John Deere	8RX Rear	TP762xP1Dx45	30" (762)	270" (6858)	6"	45	Positive
Versatile	Delta-Track	TP762xP1Ex42	30" (762)	252" (6401)	6"	42	Positive
Versatile	Delta-Track	TP915xP1Ex42	36" (915)	252" (6401)	6"	42	Positive

橡胶半履带


Conversion Track System

泰特橡胶自研的UltimaTrack 橡胶半履带是专门匹配大型联合收割机和拖拉机的行走装置，具有如下特点：

- 大幅提高大型农业车辆在松软泥泞土壤下的通过性和牵引力；
- 降低接地比压，防止土地板结，保护耕地，间接降低平地整地的成本；
- 蓄能-液压组件，全包胶支重轮，支重轮仿地形摆动装置能有效减少振动，提高驾驶体验。

Taite's UltimaTrack Conversion Track System(CTS) is designed to maximize the performance of large-power agricultural vehicles (combines&tractors).

- Greatly improve the traction and passability of large agricultural vehicles in soft and muddy field.
- Prevent land compaction by reducing pressure of the vehicle. This also reduces the cost of land preparation.
- The hydraulic tensioner with accumulator, all rubber coated wheels and oscillating bogie wheel reduce vibration and provide good riding performance.

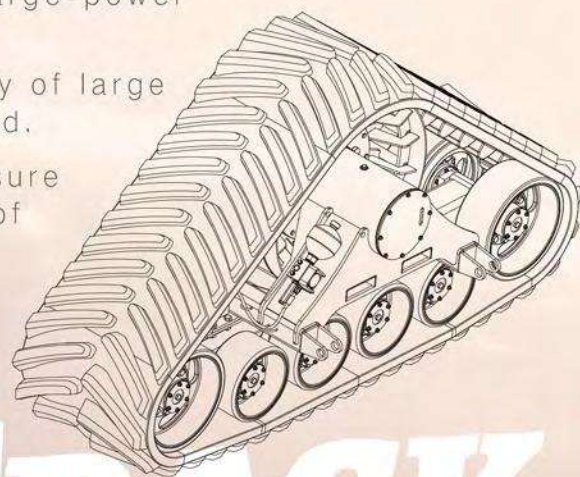

ULTIMATRACK®

极钛™ 底盘系统

液压蓄能张紧系统 Hydraulic Tensioner with Accumulator



* 液压蓄能张紧装置不仅为履带总成提供恒定的张紧力，且具有缓冲减震作用。在行驶过程中如遇较大障碍物，履带总成受到的冲击能通过油缸伸缩得到释放，减少震动的同时保护产品主体免受损害。

* The hydraulic tensioner with accumulator not only provides stable tension force for the track system, but also has the function of buffering and shock absorption. This reduces the vibration and protects the main body of the track system from damage.



一体式法兰轴 One-piece Forged Sprocket Shaft



- * 一体锻造加工成型法兰轴，经高频淬火、研磨等多道工序，比焊接成型的法兰轴具有更高强度。
- * High-strength sprocket shaft: The sprocket shaft is integrally forged and formed, then perform high-frequency quenching and grinding.

轮毂总成 Wheel Hub Assembly



- * 轮毂总成采用专利双层密封技术，有效隔绝泥土与水分，质量稳定，性能强劲。
- * The wheel hub assembly adopts Taite's patented double-layer sealing technology, which can effectively isolate the external mud and moisture, ensure the reliability of the track system.

全包胶支重轮 Rubber Coated Wheels




- * 全包胶支重轮组，提供更好的行驶质感。
- * All the wheels are rubber coated, provides good driving experience.

摆动式支重轮 Oscillating Bogie Wheels



- * 通过浮动支架的摆动，使橡胶半履带在行走过程中释放受到的冲击，减小因冲击对机体的影响，并提高驾驶体验。
- * The bogie wheel can oscillate on uneven terrain, which reduces vibration and improve riding performance.

CBL36AR3

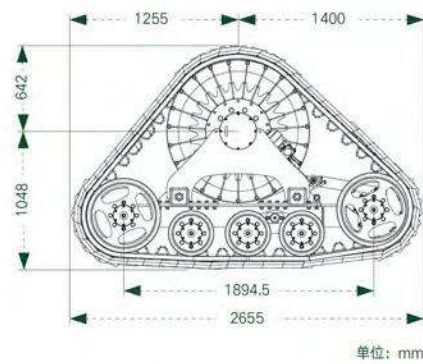

匹配机型: Applicable Vehicles

约翰迪尔: John Deere	S660 / S680 / S760 / S780 / 9670STS
凯斯: Case IH	6088 / 6130 / 6140 / 7130 / 7140
克拉斯: Claas	Tucano 470


型号: Model

CBL36AR3

外形尺寸: Dimensions	宽2655 x 高1690 (mm)
履带宽度: Track Width	915 (mm)
重量: Weight	2245 Kg (单个)
接地面积: Contact Area	1.8 m² (单个)



CBM25BR4

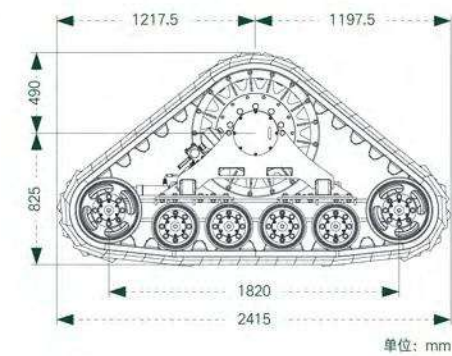

匹配机型: Applicable Vehicles

约翰迪尔: John Deere	R230 / 1075
凯斯: Case IH	4088
雷沃: Loyal	GK120


型号: Model

CBM25BR4

外形尺寸: Dimensions	宽2415 x 高1315 (mm)
履带宽度: Track Width	635 (mm)
重量: Weight	1411 kg (单个)
接地面积: Contact Area	1.2 m² (单个)



CBL36AR4

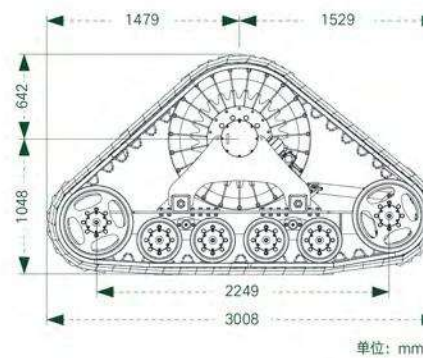

匹配机型: Applicable Vehicles

约翰迪尔: John Deere	S680 / S760 / S780
---------------------	--------------------

型号: Model

CBL36AR4

外形尺寸: Dimensions	宽3008 x 高1690 (mm)
履带宽度: Track Width	915 (mm)
重量: Weight	2505 Kg (单个)
接地面积: Contact Area	2.1 m² (单个)



LD
LEROCH
DISTRIBUTION