

BS 501


BRASS GATE VALVE

PN 16

Non-Rising stem - FXF

www.ecivalve.it

ECI EUROPEAN
CASTING
INDUSTRY

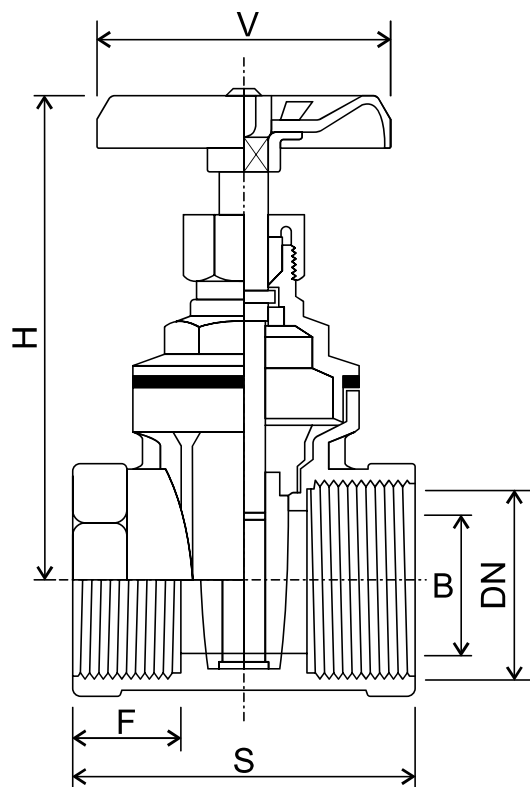

Specifications:

- PRESSURE RATING: PN16
- SUITABLE MEDIA: WATER, OIL & AIR
- WORKING TEMPERATURE: 0°C + 90°C
- ISO 288/1 THREAD FXF

Dimensions (mm)

DN	SIZE INCH	B	F	S	H	V	Weight(KGS)
15	1/2"	15	10	38	69	50	0,19
20	3/4"	19	11	44	77	50	0,26
25	1"	24	12	48	90	60	0,37
32	1.1/4"	32	13	51	97	60	0,53
40	1.1/2"	37	14	58	108	70	0,71
50	2"	47	15	63	131	80	1,16
65	2.1/2"	60	15	64	155	90	1,70
80	3"	72	18	75	183	100	2,47
100	4"	93	19	85	225	120	4,50

Materials

DESCRIPTION	MATERIAL
Body	CW617N - UNI EN 12165/98
Bonnet	CW617N - UNI EN 12165/98
Bonnet gasket	Heat resisting fiber
Stem	CW614N - UNI EN 12164/98
Wedge	CW617N - UNI EN 12165/98
Screwed ring	CW614N - UNI EN 12164/98
Packing	PTFE
Packing nut	CW614N - UNI EN 12164/98
Handwheel	Steel blue paint
Nut	Steel zinc plated

ECI EUROPEAN
CASTING
INDUSTRY

All data, descriptions and pictures contained in this leaflet may be subject to change without prior notice.
European Casting Industry Srl | Via Lazzaretto, 11 | 20124 Milan MI, Italia | P.Iva: 03228761205 | www.ecivalve.it | info@ecivalve.it