

BS155 SELLO MECÁNICO ESTÁNDAR

Parámetro

Temperatura: -20°C~200°C

Presión: $\leq 0.80\text{Mpa}$


Velocidad Lineal: $\leq 10\text{m/s}$

Cara Rotativa: CERÁMICA/SIC/SSIC/TC

Anillo Estacionario: Plástico CA/CARBON/SIC/SSIC/TC

Sellado Secundario: NBR/EPDM/VITON

Piezas Metálicas: 304/316

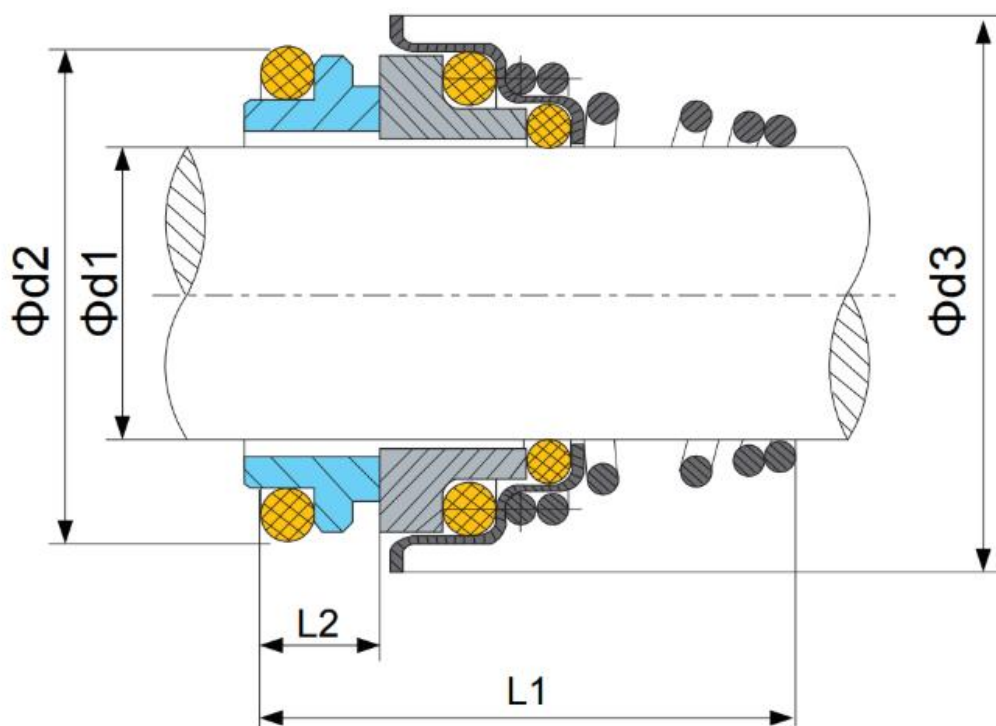

Model	d1	d3	d2	L1	L2
BS155-10	10	20	18.1	20.5	5.5
BS155-11	11	22	20.6	23.5	5.5
BS155-12	12	22	20.6	23.5	5.5
BS155-13	13	25	23.1	28	6
BS155-14	14	25	23.1	28	6
BS155-15	15	29	26.9	30	7
BS155-16	16	29	26.9	30	7
BS155-17	17	29	26.9	30	7
BS155-18	18	33	30.9	32	8
BS155-19	19	33	30.9	33	8
BS155-20	20	33	30.9	33	8
BS155-21	21	38	35.4	33	8
BS155-22	22	38	35.4	33	8
BS155-23	23	38	35.4	35	8
BS155-24	24	38	35.4	35	8
BS155-25	25	40	38.2	35.5	8.5
BS155-28	28	46	43.3	39	9
BS155-29	29	46	43.3	39	9
BS155-30	30	46	43.3	39	9
BS155-32	32	46	43.3	39	9
BS155-33	33	50	53.5	50.5	11.5
BS155-35	35	50	53.5	50.5	11.5
BS155-38	38	60.5	60.5	50.5	11.5
BS155-40	40	60.5	60.5	50.5	11.5