



LEOBUR PERÚ E.I.R.L.

LÍDER EN SELLADO DE FLUIDOS



BS2100 SELLO MECÁNICO ESTÁNDAR

Parámetro

Temperatura: -40°C~150°C

Presión: $\leq 1.2\text{Mpa}$


Velocidad Lineal: $\leq 13\text{m/s}$

Cara Rotativa: CARBON/SIC/TC

Anillo Estacionario: Cerámica/SIC/TC

Sellado Secundario: NBR/EPDM/VITON

Piezas Metálicas: 304/316

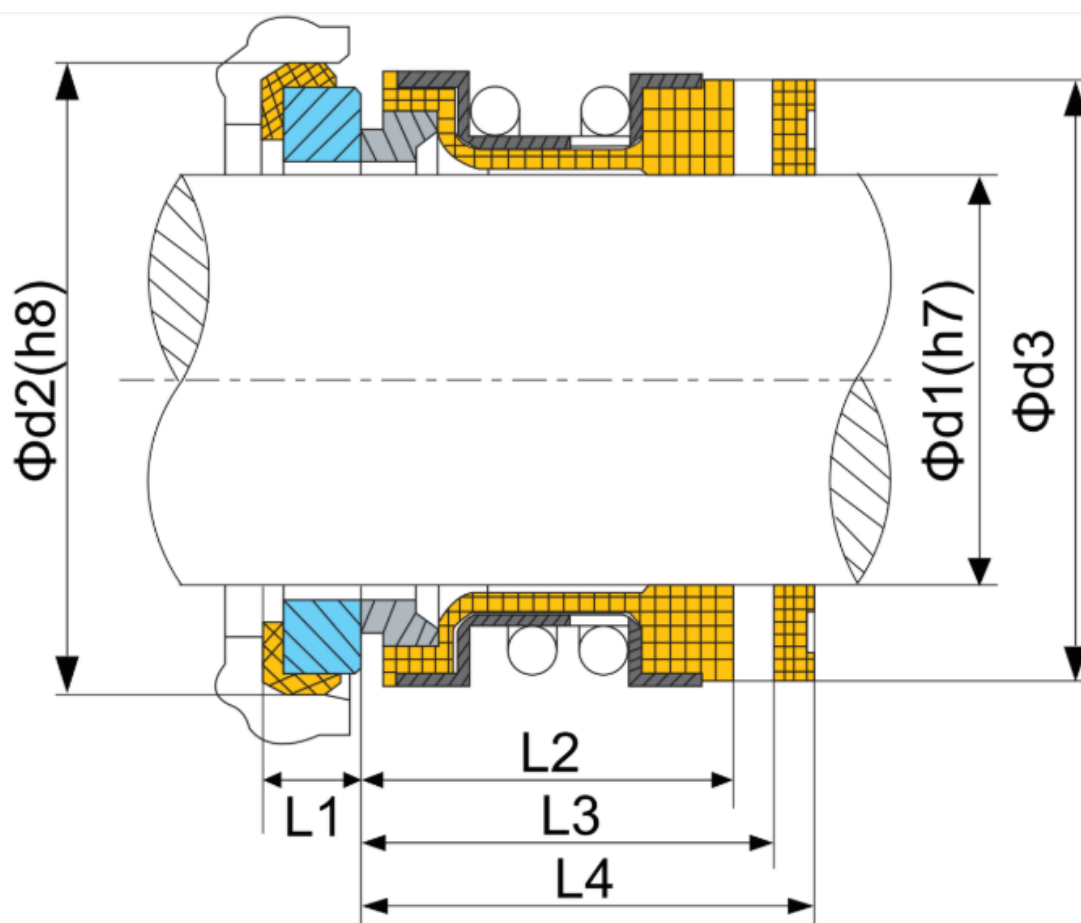

Model	d1	d3	d2	L1	L2	L3	L4
BS2100-10	10	20	21	5	15.2	27.7	35.2
BS2100-12	12	22	23	6	15.2	26.7	34.2
BS2100-14	14	24	25	6	15.2	29.2	34.2
BS2100-15	15	25	26	6	15.2	29.2	34.2
BS2100-16	16	26	27	6	15.2	29.2	34.2
BS2100-18	18	32	33	6	20.2	31.7	39.2
BS2100-20	20	34	35	6	20.2	31.7	39.2
BS2100-22	22	36	37	6	20.2	31.7	39.2
BS2100-24	24	38	39	6	20.2	34.2	44.2
BS2100-25	25	39	40	6	20.2	34.2	44.2
BS2100-28	28	42	43	6	26.2	36.7	44.2
BS2100-30	30	44	45	7	26.2	35.7	43.2
BS2100-32	32	46	48	7	26.2	35.7	48.2
BS2100-33	33	47	48	7	26.2	35.7	48.2
BS2100-35	35	49	50	8	26.2	34.7	47.2
BS2100-38	38	54	56	8	30.2	37.2	47.2
BS2100-40	40	56	58	8	30.2	37.2	47.2
BS2100-43	43	59	61	8	30.2	37.2	52.2
BS2100-45	45	61	63	8	30.2	37.2	52.2
BS2100-48	48	64	66	10	30.2	35.2	50.2
BS2100-50	50	66	70	10	30.2	37.7	50.2
BS2100-53	53	69	73	10	30.2	37.7	60.2
BS2100-55	55	71	75	10	30.2	37.7	60.2
BS2100-58	58	78	78	10	33.2	42.7	60.2
BS2100-60	60	80	80	12	33.2	40.7	58.2
BS2100-63	63	83	83	12	33.2	40.7	58.2
BS2100-65	65	85	85	12	33.2	40.7	68.2
BS2100-68	68	88	90	12	33.2	40.7	68.2
BS2100-70	70	90	92	12	33.2	48.2	68.2
BS2100-75	75	99	97	12	40.2	48.2	68.2
BS2100-80	80	104	105	14	40.2	47.7	77.7
BS2100-85	85	109	110	14	40.2	47.7	77.7
BS2100-90	90	114	115	14	40.2	52.7	77.7
BS2100-95	95	119	120	14	40.2	52.7	77.7
BS2100-100	100	124	125	14	40.2	52.7	77.7

Model	d1	d3	d2	L1	L2
BS2100-3/8	9.53	20	22.23	7.9	15.2
BS2100-1/2	12.70	24	25.40	7.9	15.2
BS2100-5/8	15.88	26	31.75	10.3	15.2
BS2100-3/4	19.05	32	34.93	10.3	20.2
BS2100-7/8	22.23	36	38.10	10.3	20.2
BS2100-1	25.40	39	41.28	11.1	20.2
BS2100-1 1/8	28.58	42	44.45	11.1	26.2
BS2100-1 1/4	31.75	46	47.63	11.1	26.2
BS2100-1 3/8	34.93	49	50.80	11.1	26.2
BS2100-1 1/2	38.10	54	53.98	11.1	30.2
BS2100-1 5/8	41.28	56	60.33	12.7	30.2
BS2100-1 3/4	44.45	61	63.50	12.7	30.2
BS2100-1 7/8	47.63	64	66.68	12.7	30.2
BS2100-2	50.80	66	69.85	12.7	30.2
BS2100-2 1/8	53.98	69	76.20	14.3	30.2
BS2100-2 1/4	57.15	77	79.38	14.3	33.2
BS2100-2 3/8	60.33	80	82.55	14.3	33.2
BS2100-2 1/2	63.50	83	85.73	14.3	33.2
BS2100-2 5/8	66.68	88	85.73	15.9	33.2
BS2100-2 3/4	69.85	89	88.90	15.9	33.2
BS2100-2 7/8	73.03	96	95.25	15.9	33.2
BS2100-3	76.20	99	98.43	15.9	40.2
BS2100-3 1/8	79.38	103	101.60	19.8	40.2
BS2100-3 1/4	82.55	104	104.78	19.8	40.2
BS2100-3 3/8	85.73	108	107.95	19.8	40.2
BS2100-3 1/2	88.90	112	111.13	19.8	40.2
BS2100-3 5/8	92.08	114	114.30	19.8	40.2
BS2100-3 3/4	95.25	118	117.48	19.8	40.2
BS2100-3 7/8	98.43	122	120.65	19.8	40.2
BS2100-4	101.60	124	123.83	19.8	40.2