

BSM3N SELLO MECÁNICO ESTÁNDAR

Parámetro

Temperatura: -30C~200°C

Presión: $\leq 1.0\text{Mpa}$


Velocidad Lineal: $\leq 10\text{m/s}$

Cara Rotativa: RESIN CA/ANTIMONIO CA/SIC/SSIC/TC

Anillo Estacionario: Cerámica/SIC/SSIC/TC

Sellado Secundario: NBR/EPDM/VITON/PTFE/FEP

Piezas Metálicas: 304/316

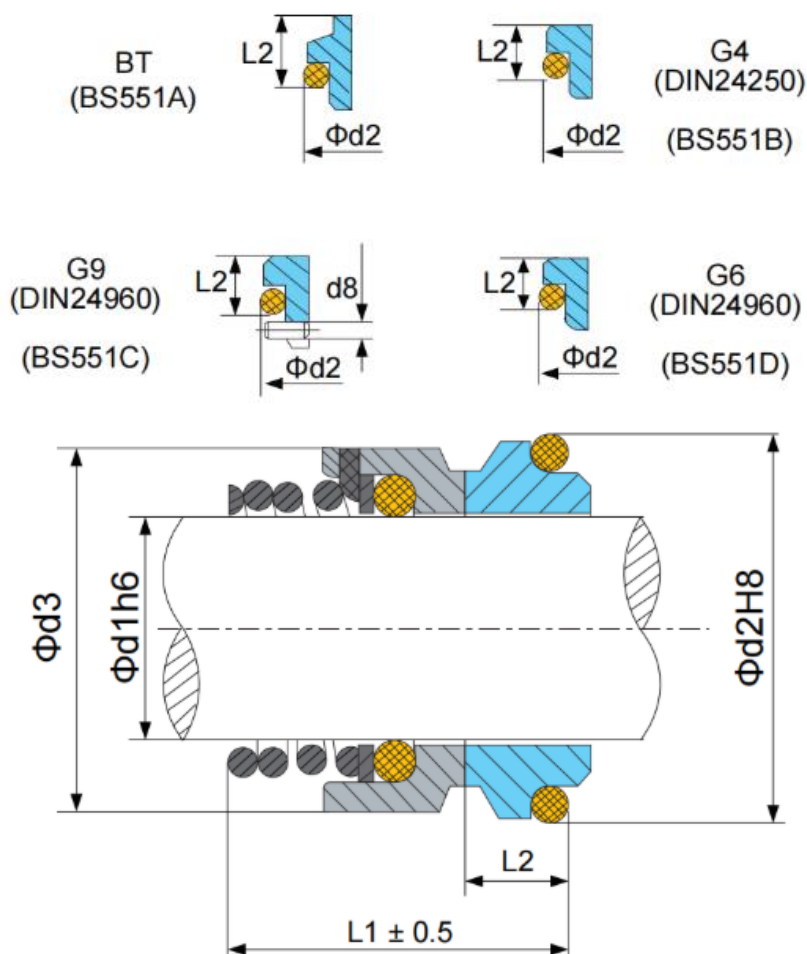

Model	d1	d3	BT			G4			G9				G6		
			d2	L1	L2	d2	L1	L2	d2	d8	L1	L2	d2	L1	L2
BSM3N-8	8	18	17.1	20.5	5.5	19.2	18.9	7							
BSM3N-10	10	19	18.1	20.5	5.5	19.2	22.1	6.6	21	3	25.5	10	21	22.1	6.6
BSM3N-11	11	20	20.6	23.5	5.5										
BSM3N-12	12	21	20.6	23.5	5.5	21.6	21.1	5.6	23	3	26	10	23	22.6	6.6
BSM3N-13	13	22	23.1	28	6										
BSM3N-14	14	23	23.1	28	6	24.6	21.1	5.6	25	3	26.5	10	25	23.1	6.6
BSM3N-15	15	24	26.9	29	7	24.6	24.1	6.6							
BSM3N-16	16	26	26.9	30	7	28	25	7.5	27	3	28	10	27	24.6	6.6
BSM3N-17	17	26	26.9	30	7										
BSM3N-18	18	29	30.9	32	8	30	26.5	8	33	3	31	11.5	33	27	7.5
BSM3N-19	19	31	30.9	33	8	35	27.5	7.5							
BSM3N-20	20	31	30.9	33	8	35	27.5	7.5	35	3	33.5	11.5	35	29.5	7.5
BSM3N-22	22	33	35.4	33	8	35	29	7.5	37	3	33	11.5	37	29	7.5
BSM3N-23	23	36	35.4	35	8										
BSM3N-24	24	35	35.4	35	8	38	30.5	7.5	39	3	35	11.5	39	31	7.5
BSM3N-25	25	36	38.2	35.5	8.5	38	32	7.5	40	3	38	11.5	40	34	7.5
BSM3N-26	26	39	38.2	35.5	8.5	40	32.5	8							
BSM3N-28	28	40	43.3	38	9	42	33.5	9	43	3	38	11.5	43	34	7.5
BSM3N-30	30	43	43.3	39	9	45	35	10.5	45	3	38	11.5	45	34	7.5
BSM3N-32	32	46	43.3	39	9	48	38.5	10.5	48	3	40	11.5	48	36	7.5
BSM3N-33	33	47	53.5	50.5	11.5										
BSM3N-34	34	48	53.5	50.5	11.5										
BSM3N-35	35	49	53.5	50.5	11.5	52	39	11	50	3	40	11.5	50	36	7.5
BSM3N-36	36	50	53.5	50.5	11.5										
BSM3N-38	38	53	60.5	50.5	11.5	55	41.3	10.3	56	4	47.5	14	56	42.5	9
BSM3N-40	40	56	60.5	50.5	11.5	58	44.8	10.8	58	4	50	14	58	45	9
BSM3N-42	42	59	60.5	50.5	11.5	62	47	12							
BSM3N-43	43	59	60.5	52.5	11.5	62	47	12	61	4	52.5	14	61	47.5	9
BSM3N-44	44	60	65.5	52.5	11.5										
BSM3N-45	45	61	65.5	52.5	11.5	64	48.1	11.6	63	4	53.5	14	63	48.5	9
BSM3N-48	48	64	65.5	52.5	11.5	68.4	53.6	11.6	66	4	60	14	66	55	9
BSM3N-50	50	66	72.5	56.5	11.5	69.3	54.6	11.6	70	4	60	15	70	54.5	9.5
BSM3N-53	53	69							73	4	62	15	73	58	11
BSM3N-55	55	71	72.5	58.5	11.5	75.4	60.3	13.3	75	4	64	15	75	60	11
BSM3N-58	58	76				78.4	63.3	13.3	78	4	70	15	78	66	11
BSM3N-60	60	78	79.3	60.5	11.5	80.4	64.3	13.3	80	4	70	15	80	66	11
BSM3N-63	63	83							83	4	70	15	83	66	11
BSM3N-65	65	84	84.5	62.5	11.5	85.4	65	13	85	4	70	15	85	66	11
BSM3N-68	68	88				91.5	66.7	13.7	90	4	73	18	90	66.3	11.3
BSM3N-70	70	90	89.5	62.5	11.5	92	67	13	92	4	75	18	92	68.3	11.3
BSM3N-75	75	98	94.5	68.5	11.5	99	69	14	97	4	80	18	97	73.3	11.3
BSM3N-80	80	100	99.5	70.5	11.5	104	73	15	105	4	80	18.2	105	73.8	12
BSM3N-85	85	110	105.5	72.7	13.5	109	74.2	15	110	4	77.4	18.2	110	73.2	14
BSM3N-90	90	117	115.5	75.7	13.5	114	77.2	15	115	4	80.4	18.2	115	76.2	14
BSM3N-95	95	122	116.5	75.7	13.5	120.3	78.2	16	120	4	79.4	17.2	120	76.2	14
BSM3N-100	100	127	119.5	88.7	13.5	123.3	91.2	16	125	4	92.4	17.2	125	89.2	14