

BSMG1/12/13/20 SELLO MECÁNICO ESTÁNDAR

Parámetro

Temperatura: -30C~200°C

Presión: $\leq 1.20\text{Mpa}$






Velocidad Lineal: $\leq 12\text{m/s}$

Cara Rotativa: RESIN CA/ANTIMONIO CA/SIC/SSIC/TC

Anillo Estacionario: Cerámica/SIC/SSIC/TC

Sellado Secundario: NBR/EPDM/VITON

Piezas Metálicas: 304/316

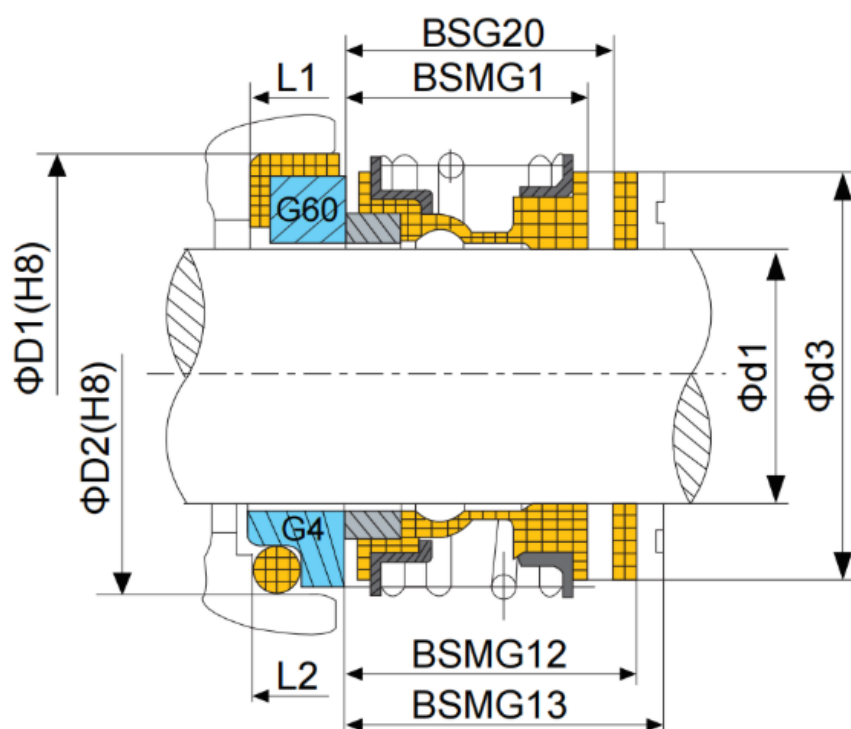

d1	BSMG1	BSMG12	BSMG13	BSMG20	d3	D1	D2	D3	L1	L2	L3	L4
10	14.7	26	33.5	25.5	22	21	19.2	24.6	6.5	6.5	9	10
12	15.2	26	33.5	33.5	24.5	23	21.6	27.8	6.5	5.5	9	10
14	17.2	28.5	33.5	25.5	28	25	24.6	30.95	6.5	5.5	10.5	10
15	17.2	28.5	33.5	25.5	28	27	24.6	30.95	6.5	6.5	10.5	10
16	17.2	28.5	33.5	25.5	28	27	28	30.95	6.5	7.5	10.5	10
18	19.7	30.1	37.7	25.5	31.5	33	30	34.15	7.5	8	10.5	11.4
19	21.7	30.1	37.7	25.5	36.5	35	35	34.15	7.5	7.5	10.5	11.4
20	21.7	30.1	37.7	25.5	36.5	35	35	35.7	7.5	7.5	10.5	11.4
22	21.7	30.1	37.7	25.5	36.5	37	35	37.3	7.5	7.5	10.5	11.4
24	22.7	32.7	42.7	25.5	42	39	38	40.5	7.5	7.5	10.5	11.4
25	23.2	32.7	42.7	25.5	42	40	38	40.5	7.5	7.5	10.5	11.4
28	26.7	35.2	42.7	33.5	48.5	43	42	46.65	7.5	9	12	11.4
30	26.7	35.2	42.7	33.5	48.5	45	45	50.8	7.5	10.5	12	11.4
32	27.7	35.2	47.7	33.5	53	48	48	50.8	7.5	10.5	12	11.4
33	27.7	35.2	47.7	33.5	53	48	50	54	7.5	11	12	11.4
35	28.7	35.2	47.7	33.5	56.5	50	52	54	7.5	11	12	11.4
38	30.2	36.2	46.2	33.5	58.5	56	55	57.15	9	10.5	12	14
40	30.2	36.2	46.2	33.5	61.5	58	58	60.35	9	10.8	12	14
42	30.2	36.2	51.2	41.5	65	61	62	63.5	9	12	12	14
43	30.2	36.2	51.2	41.5	65	61	62	63.5	9	12	12	14
45	30.2	36.2	51.2	41.5	67.5	63	64	63.5	9	11.5	12	14
48	30.7	36.2	51.2	41.5	70	66	68.4	66.7	9	11.5	12	14
50	30.7	38.2	50.7	41.5	73.5	70	69.3	69.85	9.5	11.5	13.5	15
53	33.2	36.7	59.2	41.5	78	73	72.3	73.05	11	12.5	13.5	15
55	35.2	36.7	59.2	41.5	80.5	75	75.4	76.2	11	13.5	13.5	15
58	37.2	41.7	59.2	41.5	85	78	78.4	79.4	11	13.5	13.5	15
60	38.2	41.7	59.2	41.5	88	80	80.4	79.4	11	13.5	13.5	15
65	40.2	41.7	69.2	49.5	93	85	85.4	92.1	11	13	16	15
68	40.2	41.3	69	49.5	96	90	91.5	95.25	11.5	13.7	16	18
70	40.2	49	69	49.5	99	92	92	95.25	11.5	13	16	18
75	40.2	49	69	52.5	106.5	97	99	101.6	11.5	14	16	18
80	40.2	48.2	78.2	56.5	111.5	105	104	114.3	12	15	20	18.3
85	41.2	46.2	76.2	56.5	119.5	110	109	117.5	14	15	20	18.3
90	45.2	51.2	76.2	59.5	126.5	115	114	123.85	14	15	20	18.3
95	46.2	51.2	76.2	59.5	131.5	120	120.3	127	14	16	20	17.3
100	47.2	51.2	76.2	62.5	136.5	125	123.3	133.35	14	16	20	17.3