



# ELITE SALES

ONE LINK TO | WIRE ROPE | CHAIN | HARDWARE

WIRE ROPE • CHAIN • HARDWARE

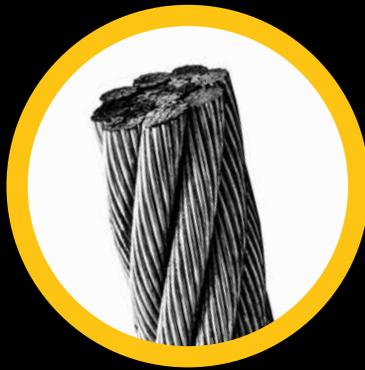

[www.elitesalesinc.com](http://www.elitesalesinc.com)



Established in 1973

The logo features the word "ELITE" in white, "SALES" in white, and "ANNIVERSARY" in white. A large "50" is prominently displayed in yellow, with a stylized "S" inside the zero. A small "TH" is positioned above the zero.

**ELITE** 50<sup>TH</sup>  
**SALES** ANNIVERSARY

A black and white photograph of an industrial facility, possibly an oil rig or refinery, at night. The structure is illuminated by various lights, creating a complex silhouette against a dark sky. A crane is visible on the left side of the structure.

**Elite Sales can meet your needs with our four  
strategically placed U.S. warehouses.**

**Houston, TX • Tampa, FL • Dyer, IN • Reno, NV**

[www.elitesalesinc.com](http://www.elitesalesinc.com)

## Company

Locations	5
Affiliations	6

## Wire Rope

Bright 6x19	8
Bright 6x26	10
Bright 6x36	11
Galvanized 6x19	13
Galvanized 6x25	14
Galvanized 6x36	15
Rotation Resistant	16
Compacted 19x19	17
Compacted 35x7	18
Drill Lines	19
Trawl Ropes	20
Sand Line	21
Stainless Steel 6x19	22
Stainless Steel 6x36	23

## Cable

Galvanized Aircraft Cable	26
Galvanized Coated Aircraft Cable	27
Galvanized Strand	28
Stainless Steel Aircraft Cable	29
Stainless Steel Coated Aircraft Cable	30
Stainless Steel Strand	31

## Chain

Grade 30 Proof Coil Chain	34
Grade 43 High Test Chain	36
Binding and Boomer Chains	37
Grade 70 Transport Chain	38
Grade 80 Alloy Chain	39
Grade 100 Alloy Chain	40
Grade 43 Stainless Steel Chain	41
Grade 43 ISO Windlass Anchor Chain	42

## Hardware

Drop Forged Wire Rope Clips	44
Malleable Wire Rope Clips	45
Fist Grip Clips	46
Heavy Duty Thimbles	47
Regular Duty Thimbles	48
Hawser Thimbles	49
Eye & Eye Turnbuckles	50
Hook & Eye Turnbuckles	51
Hook & Hook Turnbuckles	52
Jaw & Eye Turnbuckles	53
Jaw & Jaw Turnbuckles	54
Turnbuckles – Body Only	55
Locknuts (Jam Nuts)	56
Steamboat / River Ratchets	57
Screw Pin Anchor Shackles	58
Screw Pin Chain Shackles	59
Bolt Type Anchor Safety Shackles	60
Bolt Type Chain Safety Shackles	61
Regular Nut Eye Bolts	62
Shoulder Nut Eye Bolts	63
Machinery Eye Bolts	64
Eye Nuts	65
Grade 43 Clevis Hooks	66
Grade 43 Eye Grab Hooks	67
Grade 43 Pear Shaped Sling Links	68
Grade 70 Clevis Hooks	69
Grade 80 Clevis Hooks	70
Grade 80 Eye Hoist Hooks	71
Grade 80 Swivel Eye Hoist Hooks	72
Grade 80 Alloy Sliding Choker Hooks	73
Grade 80 Coupling/Connecting Links	74
Grade 80 Oblong Master Links	75
Grade 100 Alloy Self-Locking Swivel Hooks	76
Grade 100 Alloy Clevis Sling Hooks	77
Grade 100 Alloy Clevis Type Self-Locking Hooks	78
Grade 100 Alloy Clevis Grab Hooks with Cradle	79
Grade 100 Alloy Coupling/Connecting Links	80
Grade 100 Alloy Oblong Master Links	81
Spring Snap Hooks	82

WIRE ROPE

CABLE

CHAIN

HARDWARE

TIE DOWN

MISCELLANEOUS

WIRE ROPE

Lanyards Hooks / S Hooks	83
Sorting Hooks and Snap Hooks	84
Quick/Rapid Links	85
Missing Links	86
Twin Clevis Links	87
Double Clevis Links	88
Carbon Steel Sleeves	89
Hourglass/Duplex Sleeves	90
Eye & Eye Chain Swivels	91
Jaw & Eye Chain Swivels	92
Dead End Brace Grips	93
Alloy Steel Snatch Blocks	94
Wire Rope Blocks	95
Open Spelter Sockets	96
Closed Spelter Sockets	97
Hand Swaging Tools	98

CABLE

CHAIN

<b>Stainless Steel Hardware</b>	
Stainless Steel Wire Rope Clips	100
Stainless Steel Regular Duty Thimbles	101
Stainless Steel Heavy Duty Thimbles	102
Screw Pin Anchor Shackles	103
Bolt Type Anchor Shackles (Safety)	104
Screw Pin Chain Shackles	105
Eye and Eye Turnbuckles	106
Jaw and Jaw Turnbuckles	107
Jaw and Eye Turnbuckles	108
Shoulder Type Machinery Eye Bolts	109
Shoulder Eye Bolts	110
Spring Snap Hooks	111
Stainless Steel Clevis Hooks	112
Stainless Steel Eye Hooks	113
S Hooks	114
Oblong Master Links	115
Stainless Steel Oval Swage Sleeves	116
Swivels	117

HARDWARE

TIE DOWN

MISCELLANEOUS

## Tie Down

Tie Down Hooks	120
Flat Hooks	121
Long J-Hooks	122
Cluster Hooks	123
Weld On D-Rings	124
Ratchet Buckles	125
Ratchet Strap Assembly w/ Hooks	126
Tie Down Webbing	127
Grade 43 High Test Binding Chains w/ Hooks	128
Grade 70 Transport Binding Chains w/ Hooks	128
Ratchet Load Binders	129
Alloy Ratchet Load Binders	130



## MIAMI HEADQUARTERS

**Miami Executive Offices**  
**9445 S.W. 40th Street • Second Floor**  
**Miami, Florida 33165 • (800) 458-6659 Tel**



### Tampa Distribution Center

603 North 19th Street  
Tampa, Florida 33605  
(800) 458-6659 Tel



### Houston Distribution Center

6247 Navigation  
Boulevard  
Houston, Texas 77011  
(800) 458-6659 Tel



### Dyer Distribution Center

412 Matteson Street,  
Dyer, Indiana 46311  
(800) 458-6659 Tel



### Reno Distribution Center

7795 Security Cir  
Reno, NV 89506  
(800) 458-6659 Tel




# WIRE ROPE




**ELITE** **50**<sup>TH</sup>  
**SALES** ANNIVERSARY

[www.elitesalesinc.com](http://www.elitesalesinc.com)

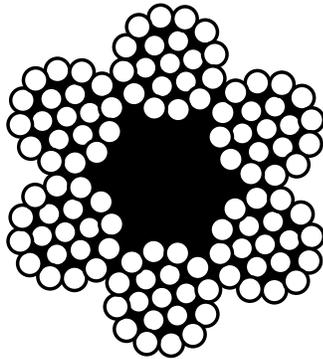

**Bright 6×19 Fiber Core**  
**Right Regular Lay, I.P.S. Grade**  
**To Federal Specification RR-W-410**


Diameter in	Weight Per Foot	Breaking Strength
inches	in LBS	in Tons
1/4	0.11	2.74
5/16	0.16	4.26
3/8	0.24	6.10
7/16	0.32	8.27
1/2	0.42	10.70
9/16	0.53	13.50
5/8	0.66	16.70
3/4	0.95	23.80
7/8	1.29	32.20
1	1.68	41.80

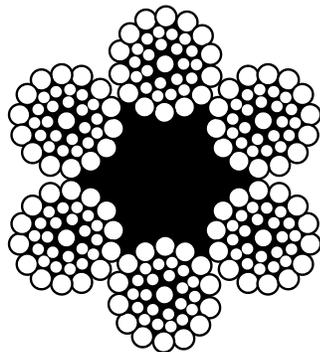

**Bright 6×37 Fiber Core**  
**Right Regular Lay, I.P.S. Grade**  
**To Federal Specification RR-W-410**


Diameter in	Weight Per Foot	Breaking Strength
inches	in LBS	in Tons
1/4	0.11	2.74
5/16	0.16	4.26
3/8	0.24	6.10
7/16	0.32	8.27
1/2	0.42	10.70
9/16	0.53	13.50
5/8	0.66	16.70
3/4	0.95	23.80
7/8	1.29	32.20
1	1.68	41.80

\*Some sizes available in E.I.P.S.

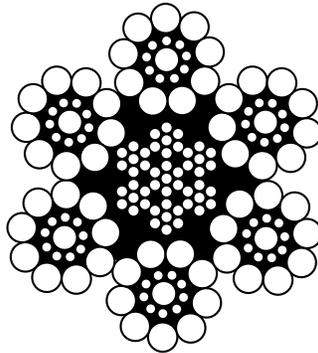

**Bright 6×19 I.W.R.C.  
 Right Regular Lay, E.I.P.S. Grade  
 To Federal Specification RR-W-410**


Diameter in	Weight Per Foot	Breaking Strength
inches	in LBS	in Tons
1/4	0.12	3.40
5/16	0.18	5.27
3/8	0.26	7.55
7/16	0.35	10.20
1/2	0.46	13.30
9/16	0.59	16.80
5/8	0.72	20.60
3/4	1.04	29.40
7/8	1.42	39.80
1	1.85	51.70

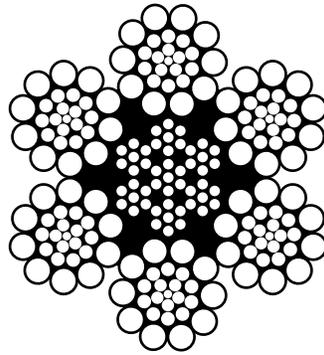

## Bright 6×26(WS) I.W.R.C. Right Regular Lay, E.I.P.S. Grade To Federal Specification RR-W-410

Diameter in	Weight Per Foot	Breaking Strength
inches	in LBS	in Tons
1/4	0.12	3.40
5/16	0.18	5.27
3/8	0.26	7.55
7/16	0.35	10.20
1/2	0.46	13.30
9/16	0.59	16.80
5/8	0.72	20.60
3/4	1.04	29.40
7/8	1.42	39.80
1	1.85	51.70
1-1/8	2.34	65.00
1-1/4	2.89	79.90
1-3/8	3.50	96.00
1-1/2	4.16	114.00
1-5/8	4.88	132.00
1-3/4	5.67	153.00
2	7.39	198.00
2-1/4	9.36	247.00
2-3/8	10.40	274.00
2-1/2	11.60	302.00
2-3/4	14.00	361.00
3	16.60	425.00


\*Some sizes available in E.E.I.P.S.

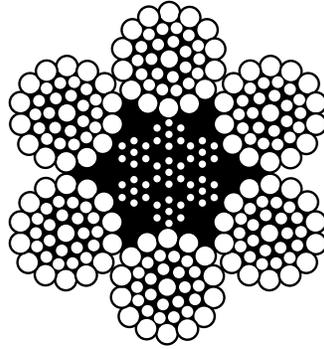

**Bright 6x36(WS) I.W.R.C.  
Right Regular Lay, E.I.P.S. Grade  
To Federal Specification RR-W-410**


Diameter in	Weight Per Foot	Breaking Strength
inches	in LBS	in Tons
1/4	0.12	3.40
5/16	0.18	5.27
3/8	0.26	7.55
7/16	0.35	10.20
1/2	0.46	13.30
9/16	0.59	16.80
5/8	0.72	20.60
3/4	1.04	29.40
7/8	1.42	39.80
1	1.85	51.70
1-1/8	2.34	65.00
1-1/4	2.89	79.90
1-3/8	3.50	96.00
1-1/2	4.16	114.00
1-5/8	4.88	132.00
1-3/4	5.67	153.00
2	7.39	198.00
2-1/4	9.36	247.00
2-1/2	11.60	302.00
2-3/4	14.00	361.00
3	16.60	425.00

\*Some sizes available in E.E.I.P.S.

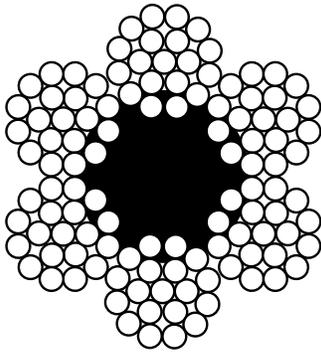


**Galvanized 6x19 Fiber Core  
Right Regular Lay, I.P.S. Grade  
To Federal Specification RR-W-410**

Diameter in	Weight Per Foot	Breaking Strength
inches	in LBS	in Tons
1/4	0.11	2.47
5/16	0.16	3.83
3/8	0.24	5.49
7/16	0.32	7.44
1/2	0.42	9.63
9/16	0.53	12.15
5/8	0.66	15.00
3/4	0.95	21.40
7/8	1.29	29.00
1	1.68	37.60

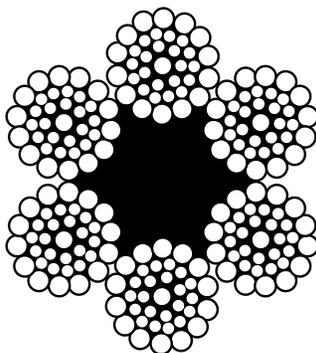


**Galvanized 6x37 Fiber Core  
Right Regular Lay, I.P.S. Grade  
To Federal Specification RR-W-410**

Diameter in	Weight Per Foot	Breaking Strength
inches	in LBS	in Tons
1/4	0.11	2.47
5/16	0.16	3.83
3/8	0.24	5.49
7/16	0.32	7.44
1/2	0.42	9.63
9/16	0.53	12.15
5/8	0.66	15.00
3/4	0.95	21.40
7/8	1.29	29.00
1	1.68	37.60

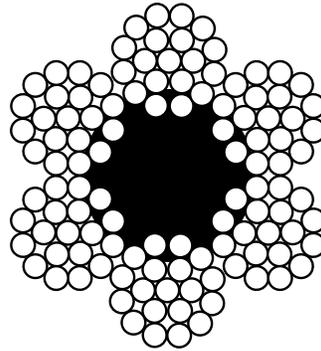

**Galvanized I.W.R.C. 6x19  
Right Regular Lay, I.P.S. Grade  
To Federal Specification RR-W-410**


Diameter in	Weight Per Foot	Breaking Strength
inches	in LBS	in Tons
1/4	0.12	2.65
5/16	0.18	4.12
3/8	0.26	5.90
7/16	0.35	8.00
1/2	0.46	10.35
9/16	0.59	13.05
5/8	0.72	16.10
3/4	1.04	23.00
7/8	1.42	31.10
1	1.85	40.40
1-1/8	2.43	50.90
1-1/4	2.89	62.50

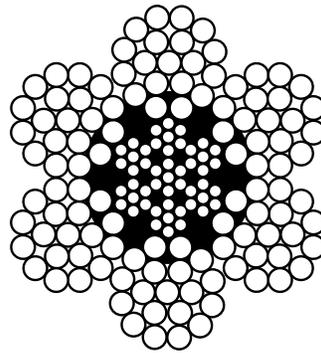

**Galvanized I.W.R.C. 6x25**  
**Right Regular Lay, E.I.P.S Grade**  
**To Federal Specification RR-W-410**

Diameter in	Weight Per Foot	Breaking Strength
inches	in LBS	in Tons
1/4	0.12	3.40
5/16	0.18	5.27
3/8	0.26	7.55
7/16	0.35	10.20
1/2	0.46	13.30
9/16	0.59	16.80
5/8	0.72	20.60
3/4	1.04	29.40
7/8	1.42	39.80
1	1.85	51.70
1 1/8	2.43	65.00
1 1/4	2.89	79.90
1 3/8	3.50	96.00
1 1/2	4.16	114.00
1 5/8	4.88	132.00
1 3/4	5.67	153.00
2	7.39	198.00


\*Some sizes available in E.E.I.P.S

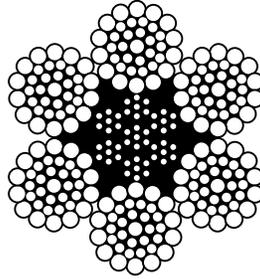

**Galvanized I.W.R.C 6x36**  
**Right Regular Lay, E.I.P.S. Grade**  
**To Federal Specification RR-W-410**

Diameter in	Weight Per Foot	Breaking Strength
inches	in LBS	in Tons
1/4	0.12	3.40
5/16	0.18	5.27
3/8	0.26	7.55
7/16	0.35	10.20
1/2	0.46	13.30
9/16	0.59	16.80
5/8	0.72	20.60
3/4	1.04	29.40
7/8	1.42	39.80
1	1.85	51.70
1 1/8	2.34	65.00
1 1/4	2.89	79.90
1 3/8	3.50	96.00
1 1/2	4.16	114.00
1 5/8	4.88	132.00
1 3/4	5.67	153.00
2	7.39	198.00
2 1/4	9.36	247.00
2 1/2	11.60	302.00
2 3/4	14.00	361.00
3	16.60	425.00
3 1/2	22.71	564.00
4	29.57	720.00
4 1/2	37.34	889.00


\*Some sizes available in E.E.I.P.S.

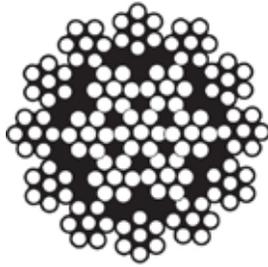

## Bright 19x7 I.W.R.C.

Right Regular Lay, E.I.P.S. Grade  
Rotation Resistant Wire Rope  
To Federal Specification RR-W-410


Diameter in	Weight Per Foot	Breaking Strength
inches	in LBS	in Tons
1/4	0.11	2.77
5/16	0.18	4.30
3/8	0.25	6.15
7/16	0.35	8.33
1/2	0.45	10.80
9/16	0.58	13.60
5/8	0.71	16.80
3/4	1.02	24.00
7/8	1.39	32.50
1	1.82	42.20
1-1/8	2.30	53.10
1-1/4	2.85	65.10

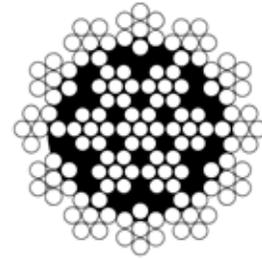

## Drawn Galvanized 19x7 I.W.R.C.

Right Regular Lay, E.I.P.S. Grade  
Rotation Resistant Wire Rope  
To Federal Specification RR-W-410


Diameter in	Weight Per Foot	Breaking Strength
inches	in LBS	in Tons
1/4	0.11	2.77
5/16	0.18	4.30
3/8	0.25	6.15
7/16	0.35	8.33
1/2	0.45	10.80
9/16	0.58	13.60
5/8	0.71	16.80
3/4	1.02	24.00
7/8	1.39	32.50
1	1.82	42.20
1-1/8	2.30	53.10
1-1/4	2.85	65.10



## Bright 8x25 I.W.R.C.


Right Regular Lay, E.I.P.S. Grade  
Rotation Resistant Wire Rope  
To Federal Specification RR-W-410

Diameter in	Weight Per Foot	Breaking Strength
inches	in LBS	in Tons
3/8	0.26	6.63
1/2	0.47	11.60
9/16	0.60	14.70
5/8	0.73	18.10
3/4	1.06	25.90

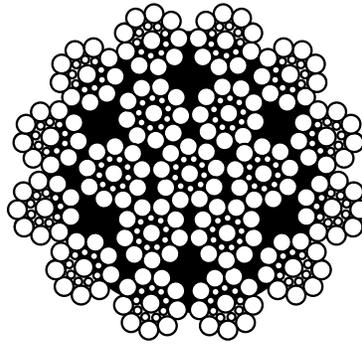

**Bright 19x19(S) I.W.R.C.**  
**Right Regular Lay, E.E.I.P.S. Grade**  
**Rotation Resistant, Compacted with C-Lubrication**  
**To Federal Specification RR-W-410 & ASTM A1023/1023W**



Diameter in	Construction	Weight Per Foot	Breaking Strength
inches		in LBS	in Tons
1/2	19x19(S)	0.54	14.60
9/16	19x19(S)	0.69	18.50
5/8	19x19(S)	0.85	22.70
3/4	19x19(S)	1.25	32.40
7/8	19x19(S)	1.68	43.80
1	19x19(S)	2.17	56.90
1-1/8	19x19(S)	2.75	71.90
1-1/4	19x19(S)	3.45	87.90

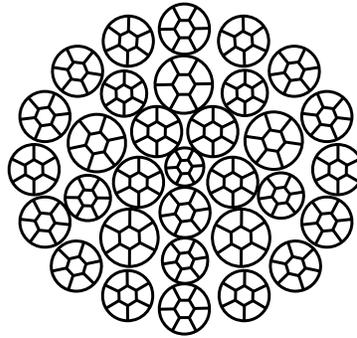

**Drawn Galvanized 35×7 I.W.R.C.  
Right Hand Lang Lay, 2160 Grade  
Compacted & Rotation Resistant  
To Federal Specification RR-W-410**

Size in	Weight Per Foot	Breaking Strength
mm	in LBS	kN(Kilonewton)
10	0.33	105
12	0.47	150
13	0.54	162
16	0.80	251
18	1.01	308
19	1.14	344
20	1.29	382
22	1.56	466
24	1.85	555
25.4	2.10	628
26	2.16	660
28	2.55	758
32	3.31	980
34	3.73	1,134
36	4.19	1,232

\*1 kN(Kilonewton) = 224.809 LBS

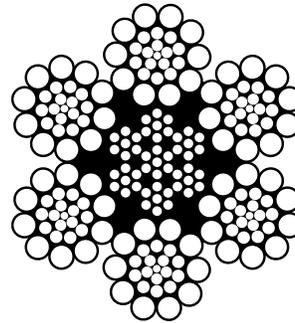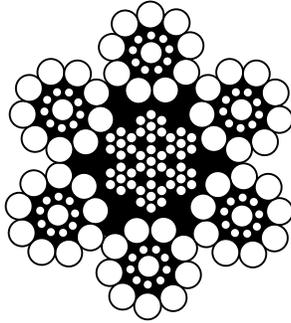


**Bright 6×19(S) & 6×26(WS) I.W.R.C.**

**Right Regular Lay, E.I.P.S. Grade**

**Rotary/Standard Drill Line with C-Lubrication**

**To Federal Specification RR-W-410, ASTM A1023/1023W & API-9A**

Diameter in	Construction	Weight Per Foot	Breaking Strength
inches		in LBS	in LBS
7/8	6x26(WS)	1.42	79,600
1	6x26(WS)	1.85	103,400
1-1/4	6x19(S)	2.89	159,800
1-3/8	6x19(S)	3.50	192,000
1-1/2	6x19(S)	4.16	228,000

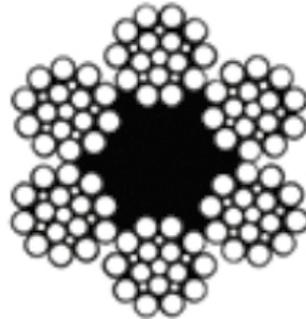



**Bright 6×21 Fiber Core**

**Left Regular Lay, E.I.P.S. Grade**

**Cable Tool Rig Drill Line**


**To Federal Specification RR-W-410, ASTM A1023/1023W & API-9A**

Diameter in	Construction	Weight Per Foot	Breaking Strength
inches		in LBS	in LBS
3/4	6x21	0.95	52,400
7/8	6x21	1.29	70,800

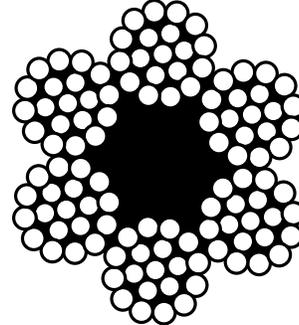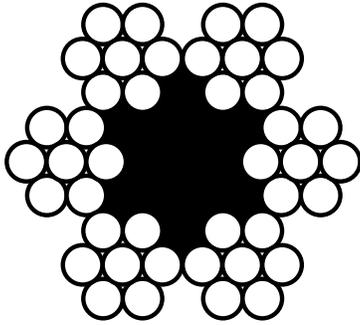


## Galvanized 6x7 & 6x19 Fiber Core Right Regular Lay, I.P.S. Grade Heavy D-Lubrication (Asphalt Based) To Federal Specification RR-W-410

Diameter in	Construction	Weight Per Foot	Breaking Strength
inches		in LBS	in LBS
5/16	6x7	0.15	7,380
3/8	6x7	0.21	10,540
7/16	6x7	0.29	14,280
1/2	6x7	0.38	18,540
9/16	6x7	0.48	23,400
5/8	6x7	0.66	28,600
5/8	6x19	0.66	28,600
3/4	6x19	0.95	42,800

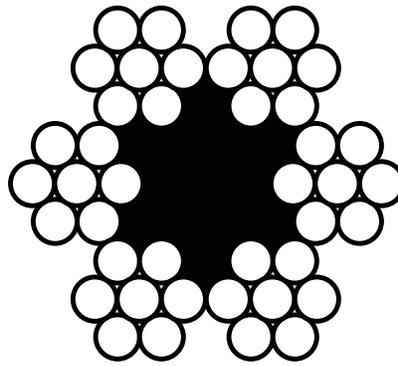

**Bright 6x7 Fiber Core(P.P.C.)  
Right Regular Lay, I.P.S. Grade  
Sand Line with B-Lubrication  
To Federal Specification RR-W-410**


Diameter in	Construction	Weight Per Foot	Breaking Strength
inches		in LBS	in LBS
1/2	6x7	1.42	20,600
9/16	6x7	1.85	28,600
5/8	6x7	2.89	31,800

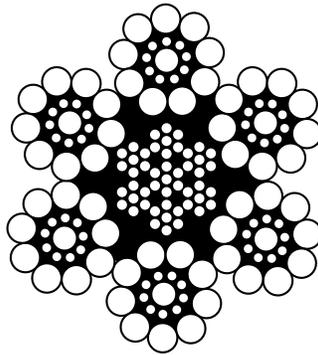

**Stainless Steel 6x19 I.W.R.C.  
Right Regular Lay  
Type 304 and 316  
To Federal Specification RR-W-410**

Diameter in	Weight Per Foot	Breaking Strength Type 304	Breaking Strength Type 316
Inches	in LBS	in LBS	in LBS
7/16	0.35	16,300	15,000
1/2	0.46	22,800	20,500
9/16	0.59	28,500	24,300
5/8	0.72	35,000	31,150
3/4	1.04	49,600	44,144

\*Some sizes available in a 6x25.

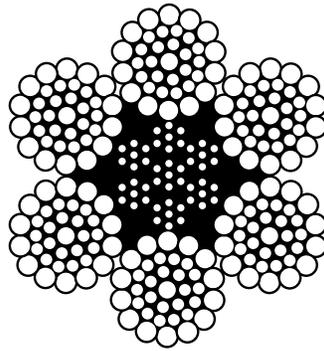

**Stainless Steel 6x36 I.W.R.C.  
Right Regular Lay  
Type 304 and 316  
To Federal Specification RR-W-410**

Diameter in	Weight Per Foot	Breaking Strength Type 304	Breaking Strength Type 316
Inches	in LBS	in LBS	in LBS
5/16	0.18	8,300	-
3/8	0.24	11,700	-
7/16	0.35	16,300	-
1/2	0.46	22,800	18,360
9/16	0.59	28,500	21,760
5/8	0.72	35,000	28,260
3/4	1.04	49,600	39,960
7/8	1.42	66,500	53,730
1	1.85	85,400	69,570
1-1/8	2.34	106,400	82,110
1-1/4	2.89	129,400	100,640

[www.elitesalesinc.com](http://www.elitesalesinc.com)



The logo features a large white '5' and a yellow '0' with a white rope-like texture inside. A 'TH' is positioned to the upper right of the '0'. Below the '50' is the word 'ANNIVERSARY' in white. To the left of the '50' is the word 'ELITE' in yellow and 'SALES' in white, stacked vertically.

**ELITE**  
**SALES** **50**<sup>TH</sup>  
**ANNIVERSARY**

Established in 1973

# CABLE




**ELITE** **50**<sup>TH</sup>  
**SALES** ANNIVERSARY

[www.elitesalesinc.com](http://www.elitesalesinc.com)

## Hot Dipped Galvanized 7×7


To Federal Specification RRW-410  
& Specification MIL-W-83420

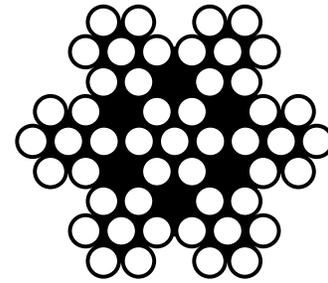

Diameter in	Weight Per Thousand Feet	Breaking Strength
Inches	in LBS	in LBS
1/16	7	480
5/64	11	650
3/32	16	920
1/8	28	1,700
5/32	43	2,600
3/16	62	3,700
1/4	106	6,100

## Hot Dipped Galvanized 7×19

To Federal Specification RRW-410  
& Specification MIL-W-83420

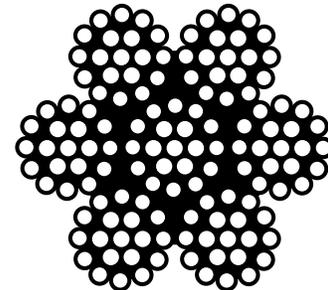


Diameter in	Weight Per Thousand Feet	Breaking Strength
Inches	in LBS	in LBS
3/32	17	1,000
1/8	29	2,000
5/32	45	2,800
3/16	65	4,200
7/32	86	5,600
1/4	110	7,000
5/16	173	9,800
3/8	243	14,400

CABLE

## Hot Dipped Galvanized 7×7

Vinyl(PVC) Coated Cable  
To Federal Specification RRW-410  
& Specification MIL-W-83420

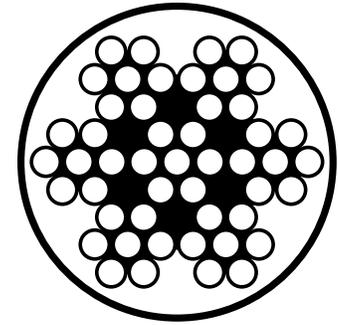


Wire Diameter	Coated To	Weight per Thousand Feet	Breaking Strength
inches	inches	in LBS	in LBS
1/16	3/32	9	480
1/16	1/8	12	480
3/32	1/8	18	920
3/32	3/16	26	920
1/8	3/16	36	1,700


CABLE

## Hot Dipped Galvanized 7×19

Vinyl(PVC) Coated Cable  
To Federal Specification RRW-410  
& Specification MIL-W-83420

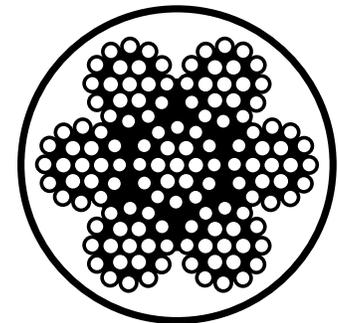


Wire Diameter	Coated To	Weight per Thousand Feet	Breaking Strength
inches	inches	in LBS	in LBS
3/32	1/8	20	1,000
1/8	3/16	36	2,000
3/16	1/4	78	4,200
3/16	5/16	78	4,200
1/4	5/16	123	7,000
5/16	3/8	197	9,800
3/8	7/16	270	14,400

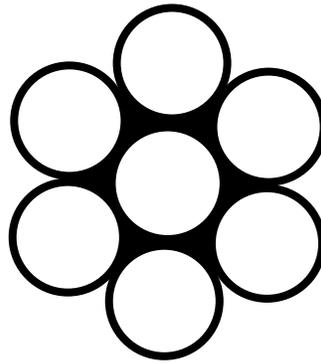

**Hot Dipped Galvanized 1x7 Steel Strand**  
Left Regular Lay, E.H.S.(Extra High Strength Grade)  
To ASTM A 475 & MIL-DTL-87161

Diameter in	Weight per Thousand Feet	Breaking Strength	Part No.
inches	in LBS	in LBS	
3/16	73	3,990	316GS17-C
1/4	121	6,650	14GS17-C
5/16	205	11,200	516GS17-C
3/8	273	15,400	38GS17-C
7/16	399	20,800	716GS17-C
1/2	520	26,900	12GS17-C

“Also known as guy wire tension cable & commonly used for structural support”

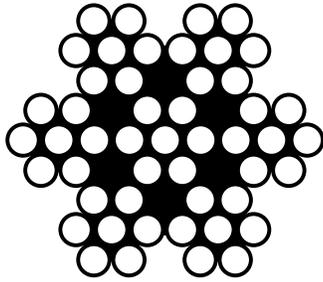


## 7 x 7 Stainless Steel Cable

Type 304 and 316  
Federal Specification RR-W-410 & MIL-W-83420

Diameter in	Weight Per Thousand Feet	Breaking Strength Type 304	Breaking Strength Type 316
Inches	in LBS	in LBS	in LBS
3/64	4	270	-
1/16	7	480	335
5/64	5	650	-
3/32	16	920	700
1/8	28	1,760	1,360
3/16	60	3,700	3,350
1/4	106	6,100	5,600


CABLE

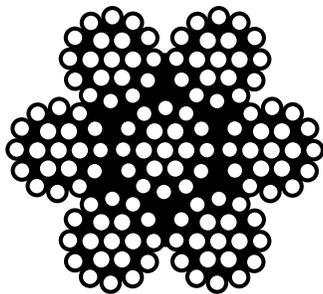

## 7 x 19 Stainless Steel Cable

Type 304 and 316  
Federal Specification RR-W-410 & MIL-W-83420


Diameter in	Weight Per Thousand Feet	Breaking Strength Type 304	Breaking Strength Type 316
Inches	in LBS	in LBS	in LBS
3/32	17	920	806
1/8	29	1,760	1,300
5/32	45	2,400	2,000
3/16	65	3,700	2,900
7/32	86	5,000	4,410
1/4	110	6,000	4,900
5/16	173	9,000	7,600
3/8	243	12,000	11,000

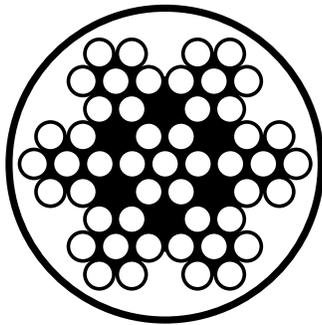

## Stainless Steel 7x7 Type 304

Vinyl(PVC) Coated Cable  
To Federal Specification RRW-410  
& Specification MIL-W-83420

Wire Diameter	Coated To	Weight per Thousand Feet	Breaking Strength
inches	inches	in LBS	in LBS
1/16	1/8	9	480
1/16	3/32	12	480
3/32	1/8	19	920
1/8	3/16	35	1,700
3/16	1/4	78	3,700
1/4	3/8	123	6,100

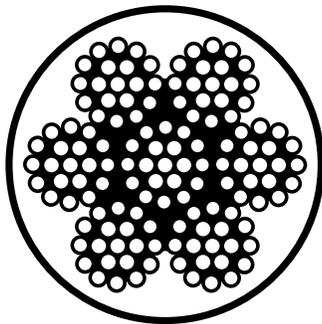


## Stainless Steel 7x19 Type 304

Vinyl(PVC) Coated Cable  
To Federal Specification RRW-410  
& Specification MIL-W-83420

Wire Diameter	Coated To	Weight per Thousand Feet	Breaking Strength
inches	inches	in LBS	in LBS
1/8	3/16	36	2,000
3/16	1/4	78	3,700
1/4	5/16	123	6,400
5/16	3/8	197	9,000
3/8	7/16	270	12,000

CABLE

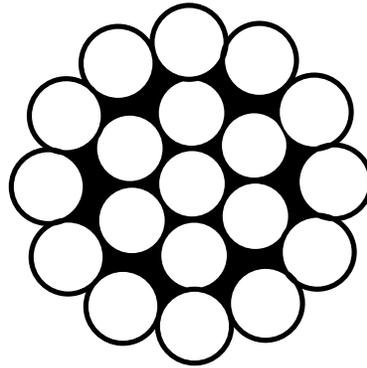

## Stainless Steel 1×19 Steel Strand

Left Regular Lay, Type 316  
To MIL-DTL-87161

Diameter in	Breaking Strength	Weight per Thousand Feet	Part No.
inches	in LBS	in Pounds	
1/8	1,780	35	18S1916-K
5/32	2,800	55	532S1916-K
3/16	4,000	77	316S1916-K
7/32	5,350	102	732S1916-K
1/4	8,200	135	14S1916-K
5/16	12,500	210	516S1916-K
3/8	17,500	294	38S1916-K

“Commonly used for cable railing systems due to it’s strength & low flexibility”



**ELITE** 50<sup>TH</sup>  
**SALES** ANNIVERSARY

Established in 1973

[www.elitesalesinc.com](http://www.elitesalesinc.com)

# CHAIN



**ELITE** **50**<sup>TH</sup>  
**SALES** ANNIVERSARY

[www.elitesalesinc.com](http://www.elitesalesinc.com)



## Grade 30 Proof Coil Chain

Manufactured to NACM (Standard Link)

Comes in Self Colored, Zinc Plated & Hot Dipped Galvanized Finishes

Chain Diameter	Working Load Limit	Proof Load Test	Minimum Breaking Load	Inside Length (MAX.)	Inside Width (MIN.)	Weight Per Foot
in	LBS	LBS	LBS	in	in	LBS
1/8	400	800	1,600	0.94	0.25	0.17
3/16	800	1,600	3,200	0.98	0.30	0.33
1/4	1,300	2,600	5,200	1.24	0.38	0.63
5/16	1,900	3,800	7,600	1.29	0.44	0.93
3/8	2,650	5,300	10,600	1.38	0.55	1.41
1/2	4,500	9,000	18,000	1.79	0.72	2.40
5/8	6,900	13,800	27,600	2.20	0.79	3.58
3/4	10,600	21,200	42,400	2.76	0.98	5.48
7/8	12,800	25,600	51,200	3.03	1.08	7.31
1	17,900	35,800	71,600	3.58	1.25	9.41

CHAIN

## Long Link Chain – Hot Galvanized

Grade 30 Proof Coil Chain

Manufactured to Long Link Specification

Size	Working Load Limit	Footage Per Drum	Inside Length	Inside Width	Weight Per Foot	Part No.
in.	lbs.	ft.	in.	in.	lbs.	
1/2	4,500	200	3.50	0.798	2.22	12HG28LL
5/8	6,900	100	3.75	1.00	3.41	58HG28LL
3/4	10,600	100	3.75	1.125	4.20	34HG28LL
1	17,900	100	4.125	1.375	10.10	1HG28LL



## Grade 30 Proof Coil Chain

Size	Length Per Full Drum	Length Per Half Drum	Length Per 5 Gallon Pail	Weight Per Foot	Part No. (Full Drum)		
					Self Colored	Zinc Plated	Hot Galvanized
in.	ft.	ft.	ft.	lbs.			
1/8	1000	n/a	n/a	0.17	n/a	n/a	18HG28
3/16	1500	750	250	0.33	316SC28	316EG28	316HG28
1/4	800	400	141	0.63	14SC28	14EG28	14HG28
5/16	550	275	92	0.93	516SC28	516EG28	516HG28
3/8	400	200	63	1.41	38SC28	38EG28	38HG28
1/2	200	100	35	2.40	12SC28	12EG28	12HG28
5/8	150	n/a	n/a	3.58	58SC28	n/a	58HG28
3/4	100	n/a	n/a	5.48	34SC28	n/a	34HG28
7/8	80	n/a	n/a	7.31	n/a	n/a	78HG28
1	60	n/a	n/a	9.41	n/a	n/a	1HG28

Part No. (Half Drum)		
Self Colored	Zinc Plated	Hot Galvanized
316SC28/	316EG28/	316HG28/
14SC228/	14EG28/	14HG28/
516SC28/	516EG28/	516HG28/
n/a	38EG28/	38HG28/
n/a	12EG28/	12HG28/

Part No. (5 Gallon Pails)	
Zinc Plated	Hot Galvanized
14EG28PP	14HG28PP
516EG28PP	516HG28PP
38EG28PP	38HG28PP
12EG28PP	12HG28PP



## Grade 43 High Test Chain

Self-Colored & Hot Dipped Galvanized  
Manufactured to NACM (Standard Link) Specifications

Size	Working Load Limit	Self Colored	Hot Galvanized
in.	LBS	Full Drums	Full Drums
1/4	2,600	14SC43	14HG43
5/16	3,900	516SC43	516HG43
3/8	5,400	38SC43	38HG43
1/2	9,200	12SC43	12HG43
5/8	13,000	58SC43	58HG43
3/4	20,200	34SC43	34HG43

\*Both Self-Colored & Hot Dipped Galvanized chains have the same load limits.

## Grade 43 High Test Chain

Manufactured to NACM (Standard Link) Specifications

Nominal Chain Size	Working Load Limit	Proof Load Test	Minimum Breaking Load	Inside Length	Inside Width	Weight Per Foot
in	LBS	LBS	LBS	in	in	LBS
1/4	2,600	3,900	7,800	1.24	0.38	0.63
5/16	3,900	5,850	11,700	1.29	0.44	0.93
3/8	5,400	8,100	16,200	1.38	0.55	1.41
1/2	9,200	13,800	27,600	1.79	0.72	2.40
5/8	13,000	19,500	39,000	2.20	0.79	3.58
3/4	20,200	30,300	60,600	2.76	0.98	5.48



**Grade 43 Binding Chains**  
20' Binding w/ Clevis Grab Hooks at each end

Size	Working Load Limit	Weight Per Piece	Part No.
in.	lbs.	lbs.	
1/4" x 20ft.	2,600	13.50	14SC43BC20
5/16" x 20ft	3,900	20.00	516C43BC20
3/8" x 20ft.	5,400	30.50	38C43BC20



**Grade 70 Binding Chains**

20' Binding/Boomer Chains w/ Clevis Grab Hooks at each end  
Chain & Hooks in Yellow Chromate finish

Size	Working Load Limit	Weight per Piece	Part No.
	LBS	LBS	
5/16 X 20'	4,700	20	516SCG70BC20
3/8 X 20'	6,600	31	38SCG70BC20
1/2 X 20'	11,300	57	12SCG70BC20



## Grade 70 Transport Chain Yellow Chromate Finish Manufactured to NACM (Standard Link) Specifications

Nominal Chain Size	Working Load Limit	Proof Load Test	Minimum Breaking Load	Inside Length	Inside Width	Weight Per Foot
in	LBS	LBS	LBS	in	in	LBS
1/4	3,150	6,300	12,600	1.24	0.38	0.63
5/16	4,700	9,400	18,800	1.29	0.44	0.93
3/8	6,600	13,200	26,400	1.38	0.55	1.41
1/2	11,300	22,600	45,200	1.79	0.72	2.40
5/8	15,800	31,600	63,200	2.20	0.79	3.75

## Yellow Zinc Chromate Manufactured to NACM (Standard Link) Specifications

Size	Working Load Limit	Length Per Full Drum	Part No.
	lbs.	ft.	Full Drum
1/4	3,150	800	14SCG70C
5/16	4,700	550	516SCG70C
3/8	6,600	400	38SCG70C
1/2	11,300	200	12SCG70C
5/8	15,800	150	58SCG70C



## Grade 80 Alloy Chain (for Overhead Lifting)

**Black Laquer Finish**

**Manufactured to NACM(Standard Link) Specifications**

Size	Working Load Limit	Minimum Breaking Load	Inside Length	Inside Width	Minimum Weight Per Foot	Part No.
	LBS	LBS	in	in	LBS	
9/32	3,500	14,000	0.90	0.430	0.71	932G80CH
5/16	4,500	18,000	1.04	0.500	0.92	516G80CH
3/8	7,100	28,400	1.26	0.600	1.44	38G80CH/
1/2	12,000	48,000	1.64	0.768	2.36	12G80CH/
5/8	18,100	72,400	2.02	0.945	3.76	58G80CH
3/4	28,300	113,200	2.52	1.180	5.50	34G80CH
7/8	34,200	136,800	2.77	1.300	7.12	78G80CH
1	47,700	190,800	3.28	1.540	9.65	1G80CH

CHAIN



## Grade 100 Blue Chain

Manufactured to NACM(Standard Link) Specifications

Size	Working Load Limit	Material Diameter	Inside Length	Inside Width	Weight Per 100 ft
in	lbs	in	in	in	Lbs.
7/32	2,700	0.218	0.68	0.31	44
9/32	4,300	0.275	0.68	0.41	77
3/8	8,800	0.397	1.22	0.57	151
1/2	15,000	0.520	1.56	0.75	266
5/8	22,600	0.630	1.93	0.92	360
3/4	35,300	0.787	2.39	1.07	580



**Stainless Steel Chain - Grade 43 High Test**  
**Type 304 & 316**  
**Manufactured to NACM(Standard Link) Specifications**

Size	Working Load Limit	Length Per Drum	Weight Per Foot	Part No.	
	LBS	ft.	LBS	Type 304	Type 316
1/8	620	1,000	0.17	18SSC304	18SSC316
3/16	1,200	1,500	0.38	316SSC304	316SSC316
1/4	2,600	800	0.61	14SSC304	14SSC316
5/16	3,900	550	0.84	516SSC304	516SSC316
3/8	5,400	400	1.40	38SSC304	38SSC316
1/2	9,200	200	2.34	12SSC304	12SSC316
5/8	13,000	150	3.58	58SSC304	58SSC316
3/4	20,200	100	5.51	34SSC304	34SSC316
1	23,250	60	9.41	1SSC304	1SSC316

\*Not for overhead lifting



## Windlass Anchor Chain - Grade 43 High Test

**Stainless Steel**

**Manufactured to ISO-Short Link Specification**

Size in	Inside Length in	Inside Width in	Weight Per Foot in LBS	Working Load Limit LBS	Stainless Steel	Galvanized
1/4	.845	0.40	0.74	2,600	14SSG40	14HG43ISO
5/16	1.03	0.50	1.06	3,900	516SSG40	516HG43ISO
3/8	1.22	0.60	1.49	5,400	38SSG40	38HG43ISO
1/2	1.59	0.77	2.53	9,200	12SSG40	12HG43ISO

**\*Galvanized & Stainless have identical break strengths**

**\*These chains are manufactured to be used on windlass chain anchor systems.**

**\*These are not BBB chains.**

CHAIN

# HARDWARE



**ELITE** **50**<sup>TH</sup>  
**SALES** ANNIVERSARY

[www.elitesalesinc.com](http://www.elitesalesinc.com)





## Drop Forged Wire Rope Clips Hot Dipped Galvanized To Federal Specification FF-C-450, Type 1, Class 1

Rope Size	Weight Per Piece in	Dimensions (in)								Part No.
		A	B	C	D	E	F	G	H	
in	lbs									
1/8	0.06	0.22	0.72	0.44	0.47	0.37	0.38	0.81	0.99	DFC18
3/16	0.10	0.25	0.97	0.56	0.59	0.50	0.44	0.94	1.18	DFC316
1/4	0.19	0.31	1.03	0.50	0.75	0.66	0.56	1.19	1.43	DFC14
5/16	0.28	0.38	1.38	0.75	0.88	0.73	0.69	1.31	1.66	DFC516
3/8	0.48	0.44	1.50	0.75	1.00	0.91	0.75	1.63	1.94	DFC38
7/16	0.78	0.50	1.88	1.00	1.19	1.13	0.88	1.91	2.28	DFC716
1/2	0.80	0.50	1.88	1.00	1.19	1.13	0.88	1.91	2.28	DFC12
9/16	1.09	0.56	2.25	1.25	1.31	1.34	0.94	2.06	2.50	DFC916
5/8	1.10	0.56	2.25	1.25	1.31	1.34	0.94	2.06	2.50	DFC58
3/4	1.42	0.62	2.75	1.44	1.50	1.39	1.06	2.25	2.84	DFC34
7/8	2.12	0.75	3.12	1.62	1.75	1.58	1.25	2.44	3.16	DFC78
1	2.52	0.75	3.50	1.81	1.88	1.77	1.25	2.63	3.47	DFC1
1-1/8	2.83	0.75	3.88	2.00	2.00	1.91	1.25	2.81	3.59	DFC118
1-1/4	4.38	0.88	4.44	2.22	2.31	2.17	1.44	3.13	4.13	DFC114
1-3/8	4.42	0.88	4.44	2.22	2.38	2.31	1.44	3.13	4.19	DFC138
1-1/2	5.44	0.88	4.94	2.38	2.59	2.44	1.44	3.41	4.44	DFC112
1-5/8	7.04	1.00	5.31	2.62	2.75	2.66	1.63	3.63	4.75	DFC158
1-3/4	9.34	1.13	5.75	2.75	3.06	2.92	1.81	3.81	5.24	DFC134
2	13.00	1.25	6.44	3.00	3.38	3.28	2.00	4.44	5.88	DFC2
2-1/4	16.00	1.25	7.13	3.19	3.88	3.19	2.00	4.56	6.38	DFC214
2-1/2	19.00	1.25	7.69	3.44	4.13	3.69	2.00	4.69	6.63	DFC212

\*Complete clip is HDG. (U-Bolt, Saddle & Nuts)

Warning: Dimensions may vary

HARDWARE

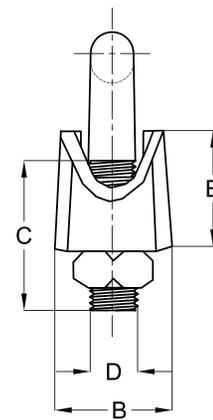
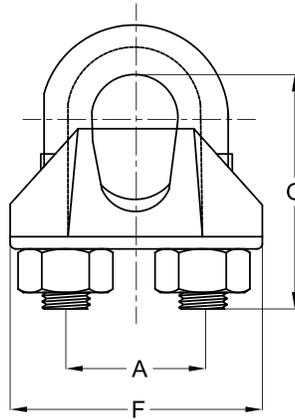


## Malleable Wire Rope Clips

Electro Galvanized/Zinc Plated  
To Federal Specification FF-C-450 Type 1, Class 2

Size in	Weight Per Piece in lbs	Dimensions (in)							Part No.
		A	B	C	D	E	F	G	
1/16	0.03	1/16	0.45	0.45	0.15	0.38	0.69	0.65	EGC116
1/8	0.04	1/8	0.55	0.55	0.18	0.42	0.87	0.79	EGC18
3/16	0.063	3/16	0.59	0.63	0.25	0.51	1.02	0.94	EGC316
1/4	0.13	1/4	0.73	0.79	0.31	0.59	1.25	1.24	EGC14
5/16	0.15	5/16	0.79	0.87	0.31	0.63	1.38	1.34	EGC516
3/8	0.21	3/8	0.87	1.06	0.38	0.87	1.59	1.65	EGC38
7/16	0.37	7/16	0.91	1.18	0.44	0.87	1.70	1.69	EGC716
1/2	0.37	1/2	1.02	1.38	0.44	0.92	1.93	2.12	EGC12
9/16	0.59	9/16	1.04	1.58	0.50	1.06	2.07	2.15	EGC916
5/8	0.59	5/8	1.12	1.58	0.50	1.10	2.26	2.33	EGC58
3/4	0.84	3/4	1.26	1.65	0.56	1.33	2.40	2.70	EGC34
7/8	1.25	7/8	1.46	1.81	0.63	1.50	2.80	3.08	EGC78
1	1.66	1	1.65	2.20	0.63	1.69	3.05	3.44	EGC1
1 1/8	2.43	1 1/8	2.06	2.75	0.75	2.19	3.38	4.00	EGC118

Warning: Dimensions may vary

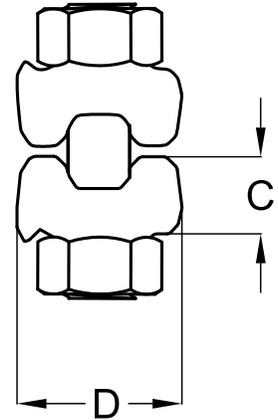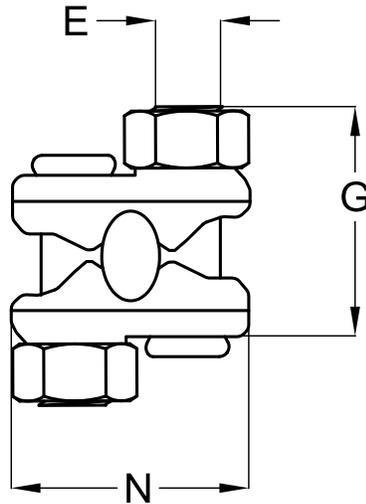


HARDWARE

## Drop Forged Fist Grip Wire Rope Clips

Hot Dipped Galvanized  
To Federal Specification FF-C-450 Type 3, Class 1

Size	Weight Per Piece in	Dimensions (in)					Part No.
		C	D	E	G	N	
in	lbs						
5/16	0.28	0.47	1.06	0.38	1.50	1.54	DF516FG
3/8	0.40	0.51	1.06	0.44	1.84	1.78	DF38FG
7/16-1/2	0.62	0.59	1.25	0.50	2.21	2.15	DF12FG
9/16-5/8	1.03	0.72	1.50	0.63	2.72	2.57	DF58FG
3/4	1.75	0.86	1.81	0.75	2.94	2.67	DF34FG
7/8	2.25	0.97	2.12	0.75	3.31	2.86	DF78FG
1	3.00	1.13	2.25	0.75	3.72	3.06	DF1FG



Warning: Dimensions may vary

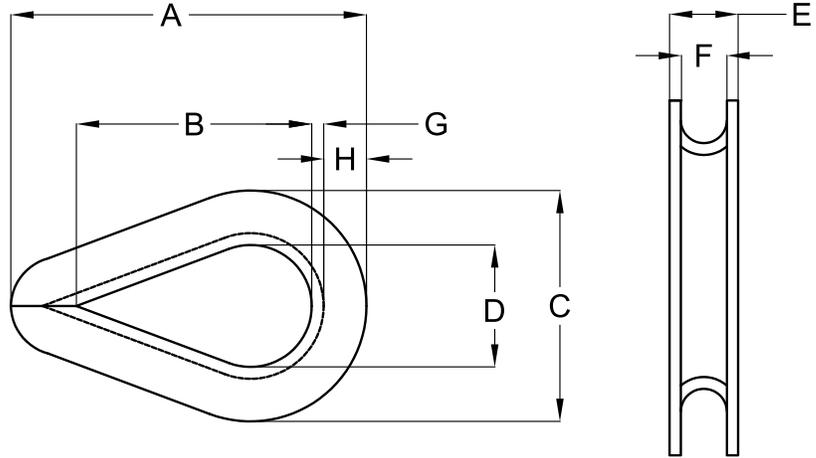

**Heavy Duty Wire Rope Thimbles**  
**Hot Dipped Galvanized**  
**To Federal Specification FF-T-276 Type 3**

Size	Weight Per Piece in lbs	Dimensions (in)								Part No.
		A	B	C	D	E	F	G	H	
1/4	0.07	2.19	1.62	1.50	0.88	0.41	0.28	0.06	0.25	HDT14
5/16	0.12	2.50	1.88	1.81	1.06	0.50	0.34	0.08	0.30	HDT516
3/8	0.22	2.88	2.12	2.12	1.12	0.63	0.41	0.11	0.39	HDT38
7/16	0.35	3.25	2.38	2.38	1.25	0.72	0.47	0.12	0.45	HDT716
1/2	0.51	3.54	2.60	2.63	1.46	0.84	0.53	0.15	0.48	HDT12
9/16	0.51	3.54	2.60	2.63	1.46	0.89	0.59	0.15	0.48	HDT916
5/8	0.76	4.25	3.25	3.12	1.75	1.00	0.66	0.16	0.53	HDT58
3/4	1.58	5.00	3.75	3.81	2.00	1.22	0.78	0.22	0.69	HDT34
7/8	1.78	5.50	4.25	4.25	2.25	1.38	0.94	0.22	0.78	HDT78
1	3.14	6.12	4.50	4.75	2.50	1.56	1.06	0.25	0.88	HDT1
1-1/8-1-1/4	4.00	7.00	5.12	5.88	2.88	1.88	1.31	0.25	1.25	HDT118
1-1/4-1-3/8	8.86	9.08	6.50	6.81	3.50	2.25	1.44	0.37	1.29	HDT114
1-3/8-1-1/2	12.95	9.00	6.25	7.12	3.50	2.62	1.56	0.50	1.31	HDT138
1 5/8	17.00	11.25	8.00	8.12	4.00	3.00	1.72	0.50	1.38	HDT158
1 3/4	17.75	12.19	9.00	8.50	4.50	3.06	1.84	0.50	1.50	HDT134
1-7/8 - 2	27.75	15.12	12.00	10.38	6.00	3.38	2.09	0.50	1.69	HDT178
2-1/4	39.50	17.50	14.00	11.88	7.00	3.88	2.38	0.62	1.82	HDT214
2-1/2	63.50	22.25	17.50	12.75	8.00	4.38	2.65	0.62	2.50	HDT212

Warning: Dimensions may vary

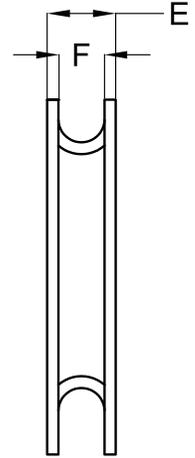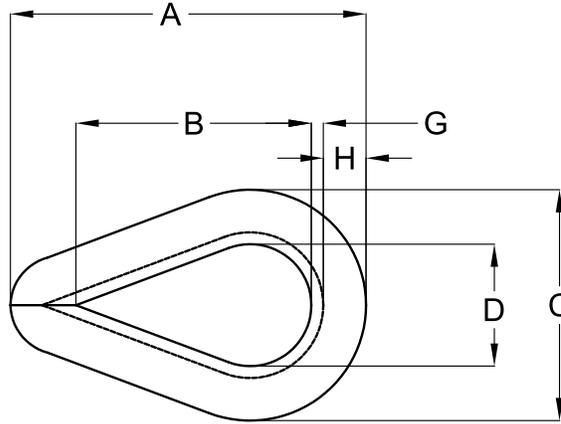


## Regular Duty Wire Rope Thimbles Hot Dipped Galvanized To Federal Specification FF-T-276 Type 2

Size	Weight Per Piece in	Dimensions (in)						Part No.
		A	B	C	D	E	F	
in	lbs							
1/8	0.04	1.90	1.10	1.37	0.71	0.28	0.05	RDT18
3/16	0.04	1.90	1.10	1.37	0.71	0.33	0.05	RDT316
1/4	0.04	1.90	1.10	1.37	0.71	0.37	0.05	RDT14
5/16	0.04	2.10	1.20	1.60	0.81	0.43	0.05	RDT516
3/8	0.07	2.32	1.45	1.70	0.94	0.55	0.06	RDT38
1/2	0.13	2.71	1.73	1.93	1.14	0.69	0.08	RDT12
5/8	0.35	3.39	2.36	2.24	1.45	0.92	0.11	RDT58
3/4	0.47	3.70	2.48	2.48	1.57	1.10	0.15	RDT34
7/8	0.85	4.89	3.42	3.54	2.20	1.32	0.15	RDT78
1	0.98	5.60	3.93	4.01	2.51	1.46	0.15	RDT1

Warning: Dimensions may vary

HARDWARE

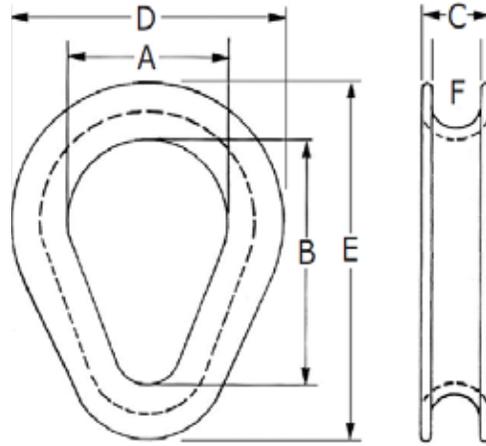


**Hawser Thimbles**  
**Hot Dipped Galvanized**  
**To Federal Specification FF-T-276 Type 3**

Size in	A	B	C	D	E	Approx. Weight in LBS	Part. No.
5/8 - 3/4	6-7/8	4-1/2	5	3	1-3/16	3.5	HGHT58K
7/8 / 2001	8-5/8	5-3/4	6-1/4	3-3/4	1-7/16	6.0	HGHT78K
1-1/8 - 1-1/4	10	6-5/8	7-1/8	4-3/16	1-11/16	8.5	HGHT118K
1-3/8 - 1-1/2	12-1/8	CO	8-3/4	5	2-3/16	18.5	HGHT138K
1-5/8 - 1-3/4	12-3/4	CO	9-1/4	5	2-7/16	24	HGHT158K
1-7 / 8-2	14-3/4	9-1/2	10-3/4	6	2-11/16	30.5	HGHT178K
2-1/8 - 2-1/4	17-1/8	11	12-1/2	7	3-1/8	56	HGHT218K
2-3/8 - 2-1/2	19-1/4	12-3/4	14-1/4	8-1/4	3-7/8	95	HGHT238K
2-3 / 4-3	2-4-1/2	15	17	9-3/8	4-15/16	135	HGHT234K

Warning: Dimensions may vary

HARDWARE

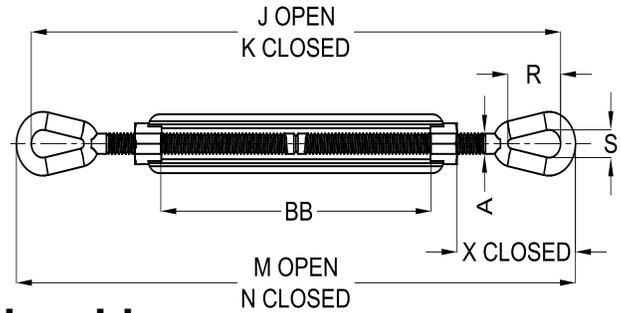


## Eye & Eye Turnbuckles

Drop Forged, Hot Dipped Galvanized

To Federal Specification FF-T791, Type 1, Form 1, Class 4 & ASTM F-1145

Thread Dia & Take Up	Working Load Limit	Weight Per Piece in	Dimensions (in)										Part No.
			A	J	K	M	N	R	S	X	BB		
in	lbs	lbs		Open	Closed	Open	Closed				Closed		
1/4x4	500	0.30	0.25	11.80	7.80	12.25	8.25	0.78	0.34	1.75	4.07	HG14X4EE	
5/16x4-1/2	800	0.47	0.31	13.56	9.06	14.12	9.62	0.94	0.44	2.09	4.58	HG516X412EE	
5/16x6	1,200	0.75	0.38	17.47	11.47	18.16	12.16	1.12	0.53	2.52	6.10	HG38X6EE	
1/2x6	2,200	1.60	0.50	19.08	13.08	19.96	13.96	1.44	0.72	3.23	6.03	HG12X6EE	
1/2X9	2,200	1.83	0.50	25.08	16.08	25.96	16.96	1.44	0.72	3.23	9.00	HG12X9EE	
1/2x12	2,200	2.08	0.50	31.08	19.08	31.96	19.96	1.44	0.72	3.23	12.36	HG12X12EE	
5/8x6	3,500	2.75	0.63	20.68	14.68	21.68	15.68	1.75	0.88	3.90	6.03	HG58X6EE	
5/8x9	3,500	3.13	0.63	26.68	17.68	27.68	18.68	1.75	0.88	3.90	3.90	HG58X9EE	
5/8x12	3,500	3.50	0.63	32.68	20.68	33.68	21.68	1.75	0.88	3.90	12.39	HG58X12EE	
3/4x6	5,200	3.89	0.75	22.38	16.38	23.62	17.62	2.09	1.00	4.69	6.13	HG34X6EE	
3/4X9	5,200	4.61	0.75	28.38	19.38	29.62	20.62	2.09	1.00	4.69	6.00	HG34X9EE	
3/4x12	5,200	5.43	0.75	34.38	22.38	35.62	23.62	2.09	1.00	4.69	12.59	HG34X12EE	
3/4x18	5,200	7.25	0.75	46.38	28.38	47.62	29.62	2.09	1.00	4.69	18.53	HG34X18EE	
7/8x12	7,200	8.10	0.88	35.32	23.32	36.82	24.82	2.38	1.25	5.10	12.16	HG78X12EE	
7/8X18	7,200	9.95	0.88	47.32	29.32	48.82	30.82	2.38	1.25	5.10	18.63	HG78X18EE	
1X6	10,000	9.33	1.00	25.97	19.97	27.72	21.72	3.00	1.44	6.36	6.18	HG1X6EE	
1X12	10,000	11.93	1.00	37.97	25.97	39.97	27.72	3.00	1.44	6.36	12.18	HG1X12EE	
1X18	10,000	14.00	1.00	49.97	31.97	51.72	33.72	3.00	1.44	6.36	18.18	HG1X18EE	
1X24	10,000	17.25	1.00	61.97	37.97	63.72	39.72	3.00	1.44	6.36	24.84	HG1X24EE	
1-1/4x12	15,200	19.00	1.25	40.31	28.31	42.56	30.56	3.56	1.81	7.72	12.06	HG114X12EE	
1-1/4x18	15,200	23.00	1.25	52.31	34.31	54.56	36.56	3.56	1.81	7.72	18.06	HG114X18EE	
1-1/4x24	15,200	27.00	1.25	64.31	40.31	66.56	42.56	3.56	1.81	7.72	24.62	HG114X24EE	
1-1/2x12	21,400	27.50	1.50	42.50	30.50	45.00	33.00	4.06	2.12	8.62	12.32	HG112X12EE	
1-1/2x18	21,400	31.00	1.50	54.50	36.50	57.00	39.00	4.06	2.12	8.62	18.32	HG112X18EE	
1-1/2x24	21,400	37.50	1.50	66.50	42.50	69.00	45.00	4.06	2.12	8.62	24.94	HG112X24EE	
1-3/4x18	28,000	52.50	1.75	57.38	39.38	60.38	42.38	4.62	2.38	10.00	18.37	HG134X18EE	
1-3/4x24	28,000	58.00	1.75	69.38	45.38	72.38	48.38	4.62	2.38	10.00	24.37	HG134X24EE	
2x24	37,000	85.25	2.00	75.69	51.69	79.19	55.19	5.57	2.69	13.09	24.48	HG2X24EE	
2-1/2x24	60,000	149.00	2.50	79.18	55.18	83.18	59.18	6.49	3.12	13.76	24.60	HG212X24EE	
2-3/4x24	75,000	174.00	2.75	81.34	57.34	85.34	61.84	7.00	3.25	15.09	24.65	HG234X24EE	

Warning: Dimensions may vary

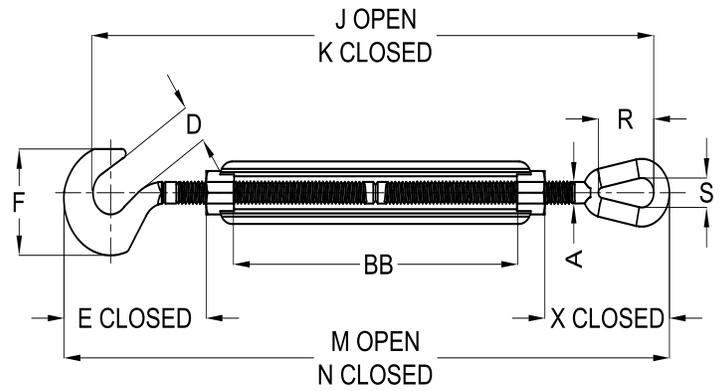


## Hook & Eye Turnbuckles

Drop Forged, Hot Dipped Galvanized

To Federal Specification FF-T791, Type 1, Form 1, Class 6 & ASTM F-1145

Thread Dia & Take Up	Working Load Limit	Weight Per Piece in	Dimensions (in)										Part No.
			A	B	C	D	E	F	G	H	K	P	
in	lbs	lbs			Closed	Closed	Closed					Closed	
1/4 x 4	400	0.30	0.25	0.45	1.59	11.94	7.94	1.27	4.00	0.78	0.34	1.75	HG14X4HE
5/16 x 4 1/2	700	0.47	0.31	0.50	1.94	13.81	9.31	1.50	4.50	0.94	0.44	2.09	HG516X412HE
3/8 x 6	1,000	0.75	0.38	0.56	2.30	17.72	11.72	1.77	6.00	1.12	0.53	2.52	HG38X6HE
1/2 x 6	1,500	1.60	0.50	0.66	2.94	19.38	13.38	2.28	6.00	1.44	0.72	3.23	HG12X6HE
1/2 x 9	1,500	1.83	0.50	0.66	2.94	25.38	16.38	2.28	9.00	1.44	0.72	3.23	HG12X9HE
1/2 x 12	1,500	2.08	0.50	0.66	2.94	31.38	19.38	2.28	12.00	1.44	0.72	3.23	HG12X12HE
5/8 x 6	2,250	2.75	0.63	0.84	3.69	21.25	15.25	2.81	6.00	1.75	0.88	3.90	HG58X6HE
5/8 x 9	2,250	3.13	0.63	0.84	3.69	27.25	18.25	2.81	9.00	1.75	0.88	3.90	HG58X9HE
5/8 x 12	2,250	3.50	0.63	0.84	3.69	33.25	21.25	2.81	12.00	1.75	0.88	3.90	HG58X12HE
3/4 x 6	3,000	3.89	0.75	0.98	4.52	23.28	17.28	3.33	6.00	2.09	1.00	4.69	HG34X6HE
3/4 x 9	3,000	4.61	0.75	0.98	4.52	29.28	20.28	3.33	9.00	2.09	1.00	4.69	HG34X9HE
3/4 x 12	3,000	5.43	0.75	0.98	4.52	35.28	23.28	3.33	12.00	2.09	1.00	4.69	HG34X12HE
3/4 x 18	3,000	7.25	0.75	0.98	4.52	47.28	29.28	3.33	18.00	2.09	1.00	4.69	HG34X18HE
7/8 x 12	4,000	8.10	0.88	1.13	5.19	37.00	25.00	3.78	12.00	2.38	1.25	5.10	HG78X12HE
1 x 6	5,000	9.33	1.00	1.25	5.84	26.69	20.69	4.25	6.00	3.00	1.44	6.36	HG1X6HE
1 x 12	5,000	11.93	1.00	1.25	5.84	38.69	26.69	4.25	12.00	3.00	1.44	6.36	HG1X12HE

Warning: Dimensions may vary

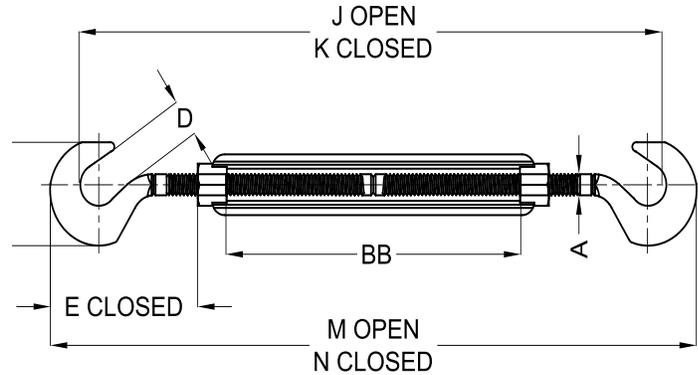

## Hook & Hook Turnbuckles


Drop Forged, Hot Dipped Galvanized

To Federal Specification FF-T791, Type 1, Form 1, Class 5 & ASTM F-1145

Thread Dia & Take Up	Working Load Limit	Weight Per Piece in	Dimensions (in)							Part No.
			A	B	C	D	E	F	G	
in	lbs	lbs			Closed	Open	Closed			
1/4 x 4	400	0.30	0.25	0.45	1.59	11.94	7.94	1.27	4.00	HG14X4HH
5/16 x 4 1/2	700	0.47	0.31	0.50	1.94	13.81	9.31	1.50	4.50	HG516X412HH
3/8 x 6	1,000	0.75	0.38	0.56	2.30	17.72	11.72	1.77	6.00	HG38X6HH
1/2 x 6	1,500	1.60	0.50	0.66	2.94	19.38	13.38	2.28	6.00	HG12X6HH
1/2 x 9	1,500	1.83	0.50	0.66	2.94	25.38	16.38	2.28	9.00	HG12X9HH
1/2 x 12	1,500	2.08	0.50	0.66	2.94	31.38	19.38	2.28	12.00	HG12X12HH
5/8 x 6	2,250	2.75	0.63	0.84	3.69	21.25	15.25	2.81	6.00	HG58X6HH
5/8 x 9	2,250	3.13	0.63	0.84	3.69	27.25	18.25	2.81	9.00	HG58X9HH
5/8 x 12	2,250	3.50	0.63	0.84	3.69	33.25	21.25	2.81	12.00	HG58X12HH
3/4 x 6	3,000	3.89	0.75	0.98	4.52	23.28	17.28	3.33	6.00	HG34X6HH
3/4 x 9	3,000	4.61	0.75	0.98	4.52	29.28	20.28	3.33	9.00	HG34X9HH
3/4 x 12	3,000	5.43	0.75	0.98	4.52	35.28	23.28	3.33	12.00	HG34X12HH
7/8 x 12	4,000	8.10	0.88	1.13	5.19	37.00	25.00	3.78	12.00	HG78X12HH
7/8 x 18	4,000	9.95	0.88	1.13	5.19	49.00	31.00	3.78	18.00	HG78X18HH
1 x 6	5,000	9.33	1.00	1.25	5.84	26.69	20.69	4.25	6.00	HG1X6HH
1 x 12	5,000	11.93	1.00	1.25	5.84	38.69	26.69	4.25	12.00	HG1X12HH

Hot dip galvanized • End fittings are quenched and tempered, bodies are normalized

**Warning: Dimensions may vary**

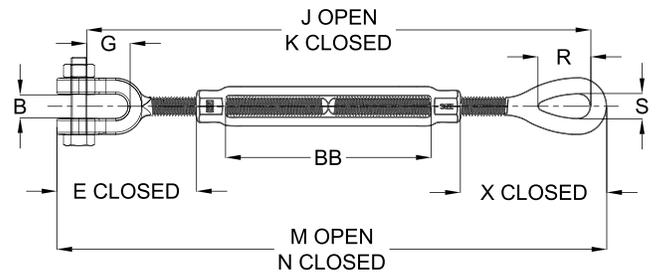

## Jaw & Eye Turnbuckles


Drop Forged, Hot Dipped Galvanized

To Federal Specification FF-T791, Type 1, Form 1, Class 8 & ASTM F-1145

Thread Dia & Take Up	Working Load Limit	Weight Per Piece in	Dimensions (in)												Part No.
			A	B	E	G	J	K	M	N	R	S	X	BB	
in	lbs	lbs			Closed		Open	Closed	Open				Closed		
1/4x4	500	0.32	0.25	0.45	1.58	0.62	11.35	7.35	12.07	8.07	0.78	0.34	1.75	4.00	HG14X4JE
5/16x4-1/2	800	0.47	0.31	0.50	1.98	0.87	13.71	8.71	14.01	9.51	0.94	0.44	2.09	4.50	HG516X412JE
3/8x6	1,200	0.76	0.38	0.54	2.12	0.87	16.81	10.81	17.77	11.77	1.12	0.53	2.52	6.00	HG38X6JE
1/2x6	2,200	1.53	0.50	0.68	2.75	1.06	18.29	12.29	19.48	13.48	1.44	0.72	3.23	6.00	HG12X6JE
1/2x9	2,200	1.71	0.50	0.68	2.75	1.06	24.29	15.29	25.48	16.48	1.44	0.72	3.23	9.00	HG12X9JE
1/2x12	2,200	2.06	0.50	0.68	2.75	1.06	30.29	18.29	31.48	19.48	1.44	0.72	3.23	12.00	HG12X12JE
5/8x6	3,500	2.35	0.63	0.82	3.50	1.31	19.74	13.74	21.28	15.28	1.75	0.88	3.90	6.00	HG58X6JE
5/8x9	3,500	3.06	0.63	0.82	3.50	1.31	25.74	16.74	27.28	18.28	1.75	0.88	3.90	9.00	HG58X9JE
5/8x12	3,500	3.78	0.63	0.82	3.50	1.31	31.74	19.74	33.28	21.28	1.75	0.88	3.90	12.00	HG58X12JE
3/4x6	5,200	4.00	0.75	1.03	4.18	1.50	21.19	15.19	23.11	17.11	2.09	1.00	4.69	6.00	HG34X6JE
3/4x9	5,200	4.75	0.75	1.03	4.18	1.50	27.19	18.19	29.11	20.11	2.09	1.00	4.69	9.00	HG34X9JE
3/4x12	5,200	5.36	0.75	1.03	4.18	1.50	33.19	21.19	35.11	23.11	2.09	1.00	4.69	12.00	HG34X12JE
3/4x18	5,200	7.00	0.75	1.03	4.18	1.50	45.19	27.19	47.11	29.11	2.09	1.00	4.69	18.00	HG34X18JE
7/8x12	7,200	8.00	0.88	1.23	4.85	1.75	34.34	22.34	36.57	24.57	2.38	1.25	5.10	12.00	HG78X12JE
7/8x18	7,200	9.75	0.88	1.23	4.85	1.75	46.34	28.34	48.57	30.57	2.38	1.25	5.10	18.00	HG78X18JE
1x6	10,000	8.92	1.00	1.31	5.53	2.06	24.34	18.34	26.89	20.89	3.00	1.44	6.36	6.00	HG1X6JE
1x12	10,000	11.20	1.00	1.31	5.53	2.06	36.34	24.34	38.89	26.89	3.00	1.44	6.36	12.00	HG1X12JE
1x18	10,000	13.30	1.00	1.31	5.53	2.06	48.34	30.34	50.89	32.89	3.00	1.44	6.36	18.00	HG1X18JE
1x24	10,000	17.00	1.00	1.31	5.53	2.06	60.34	36.34	62.89	38.89	3.00	1.44	6.36	24.00	HG1X24JE
1-1/4x12	15,200	20.00	1.25	1.86	7.21	2.81	38.82	26.82	42.05	30.05	3.56	1.81	7.72	12.00	HG114X12JE
1-1/4x18	15,200	24.18	1.25	1.86	7.21	2.81	50.82	32.82	54.05	36.05	3.56	1.81	7.72	18.00	HG114X18JE
1-1/4x24	15,200	28.50	1.25	1.86	7.21	2.81	62.82	38.82	66.05	42.05	3.56	1.81	7.72	24.00	HG114X24JE
1-1/2x12	21,400	28.99	1.50	2.25	7.88	2.81	40.50	28.50	44.25	32.25	4.06	2.12	8.62	12.00	HG112X12JE
1-1/2x18	21,400	35.00	1.50	2.25	7.88	2.81	52.50	34.50	56.25	38.25	4.06	2.12	8.62	18.00	HG112X18JE
1-1/2x24	21,400	39.18	1.50	2.25	7.88	2.81	64.50	40.50	68.25	44.25	4.06	2.12	8.62	24.00	HG112X24JE
1-3/4x18	28,000	53.75	1.75	2.60	9.40	3.38	55.38	37.38	59.78	41.78	4.62	2.38	10.00	18.00	HG134X18JE
1-3/4x24	28,000	60.68	1.75	2.60	9.40	3.38	67.38	43.38	71.78	47.78	4.62	2.38	10.00	24.00	HG134X24JE
2x24	37,000	89.00	2.00	2.62	11.86	3.69	72.62	48.62	77.95	53.95	5.75	2.69	13.09	24.00	HG2X24JE

Hot dip galvanized • End fittings are quenched and tempered, bodies are normalized

Warning: Dimensions may vary

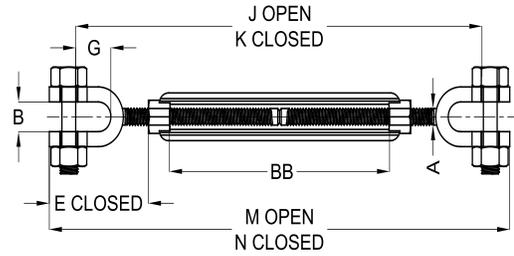


## Jaw & Jaw Turnbuckles

Drop Forged, Hot Dipped Galvanized

To Federal Specification FF-T791, Type 1, Form 1, Class 7 & ASTM F-1145

Thread Dia & Take Up	Working Load Limit	Weight Per Piece in	Dimensions (in)									Part No.
			A	B	E	G	J	K	M	N	BB	
in	lbs	lbs		Open		Open	Closed	Open				
1/4x4	500	0.36	0.25	0.45	1.58	0.62	10.90	6.90	11.90	7.90	4.00	HG14X4JJ
5/16x4-1/2	800	0.52	0.31	0.50	1.98	0.87	12.36	8.36	13.90	9.40	4.50	HG516X412JJ
3/8x6	1,200	0.81	0.38	0.54	2.12	0.87	16.14	10.14	17.38	11.38	6.00	HG38X6JJ
1/2x6	2,200	1.50	0.50	0.68	2.75	1.06	17.50	11.50	19.00	13.00	6.00	HG12X6JJ
1/2X9	2,200	1.74	0.50	0.68	2.75	1.06	23.50	14.50	25.00	16.00	9.00	HG12X9JJ
1/2x12	2,200	2.40	0.50	0.68	2.75	1.06	29.50	17.50	31.00	19.00	12.00	HG12X12JJ
5/8x6	3,500	2.72	0.63	0.82	3.50	1.31	18.80	12.80	20.88	14.88	6.00	HG58X6JJ
5/8X9	3,500	3.24	0.63	0.82	3.50	1.31	24.80	15.80	26.88	17.88	9.00	HG58X9JJ
5/8x12	3,500	3.74	0.63	0.82	3.50	1.31	30.80	18.80	32.88	20.88	12.00	HG58X12JJ
3/4x6	5,200	4.11	0.75	1.03	4.18	1.50	20.00	14.00	22.60	16.60	6.00	HG34X6JJ
3/4X9	5,200	5.10	0.75	1.03	4.18	1.50	26.00	17.00	28.60	19.60	9.00	HG34X9JJ
3/4x12	5,200	5.65	0.75	1.03	4.18	1.50	32.00	20.00	34.60	22.60	12.00	HG34X12JJ
3/4x18	5,200	7.00	0.75	1.03	4.18	1.50	44.00	26.00	46.60	28.60	18.00	HG34X18JJ
7/8x12	7,200	8.17	0.88	1.23	4.85	1.75	33.36	21.36	36.32	24.32	12.00	HG78X12JJ
7/8X18	7,200	9.96	0.88	1.23	4.85	1.75	45.36	27.36	48.32	30.32	18.00	HG78X18JJ
1X6	10,000	8.50	1.00	1.31	5.53	2.06	22.72	16.72	26.06	20.06	6.00	HG1X6JJ
1x12	10,000	12.00	1.00	1.31	5.53	2.06	34.72	22.72	38.06	26.06	12.00	HG1X12JJ
1X18	10,000	14.00	1.00	1.31	5.53	2.06	46.72	28.72	50.06	32.06	18.00	HG1X18JJ
1X24	10,000	17.00	1.00	1.31	5.53	2.06	58.72	34.72	62.06	38.06	24.00	HG1X24JJ
1-1/4X12	15,200	21.50	1.25	1.86	7.21	2.81	37.34	25.34	41.54	29.54	12.00	HG114X12JJ
1-1/4x18	15,200	24.25	1.25	1.86	7.21	2.81	49.34	31.34	53.54	35.54	18.00	HG114X18JJ
1-1/4x24	15,200	28.00	1.25	1.86	7.21	2.81	61.34	37.34	65.54	41.54	24.00	HG114X24JJ
1-1/2x12	21,400	30.50	1.50	2.25	7.88	2.81	38.50	26.50	43.50	31.50	12.00	HG12X12JJ
1-1/2x18	21,400	36.75	1.50	2.25	7.88	2.81	50.50	32.50	55.50	37.50	18.00	HG12X18JJ
1-1/2x24	21,400	40.67	1.50	2.25	7.88	2.81	62.50	38.50	67.50	43.50	24.00	HG112X24JJ
1-3/4x18	28,000	55.04	1.75	2.60	9.40	3.38	53.38	35.38	59.18	41.18	18.00	HG134X18JJ
1-3/4x24	28,000	63.36	1.75	2.60	9.40	3.38	65.38	41.38	71.18	47.18	24.00	HG134X24JJ
2x24	37,000	94.25	2.00	2.62	11.86	3.69	69.54	45.54	76.72	52.72	24.00	HG2X24JJ
2-1/2x24	75,000	198.00	2.75	3.68	15.22	4.19	74.75	50.75	85.50	61.50	24.00	HG212X24JJ


Warning: Dimensions may vary

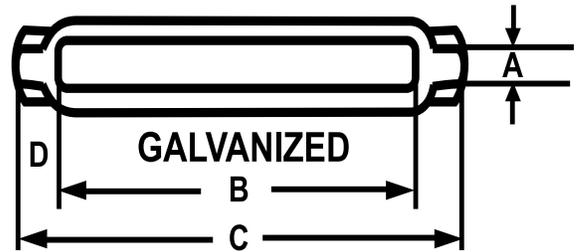

**Turnbuckles – Body Only**  
**Drop Forged, Hot Dipped Galvanized**  
**To Federal Specifications FF-T-791b, Type 1, Form 1, Class 2**

Thread Dia & Take Up	Working Load Limit	Weight Per Piece in	Dimensions (in)								Part No.
			AA	BB	CC	DD	EE	GG	HH	JJ	
in	lbs	lbs		Open		Open	Closed	Open			
1/2x6	2,200	0.70	7.70	6.03	0.84	1.19	0.68	0.81	0.63	0.28	HG12X6TBB
1/2x9	2,200	1.03	11.03	9.36	0.84	1.19	0.68	0.81	0.63	0.28	HG12X9TBB
1/2x12	2,200	1.27	14.03	12.36	0.84	1.19	0.68	0.81	0.63	0.28	HG12X12TBB
5/8x6	3,500	1.11	8.02	6.03	1.00	1.43	0.83	1.00	0.75	0.34	HG58X6TBB
5/8x9	3,500	1.59	11.38	9.36	1.00	1.43	0.83	1.00	0.75	0.34	HG58X9TBB
5/8x12	3,500	1.96	14.38	12.39	1.00	1.43	0.83	1.00	0.75	0.34	HG58X12TBB
3/4x6	5,200	1.50	8.26	6.13	1.07	1.74	0.94	1.13	0.94	0.40	HG34X6TBB
3/4x9	5,200	2.17	11.72	9.59	1.07	1.74	0.94	1.13	0.94	0.40	HG34X9TBB
3/4x12	5,200	2.66	14.72	12.59	1.07	1.74	0.94	1.13	0.94	0.40	HG34X12TBB
3/4x18	5,200	3.63	20.66	18.56	1.07	1.74	0.94	1.13	0.94	0.40	HG34X18TBB
7/8x12	7,200	3.61	14.62	12.16	1.23	2.00	1.13	1.31	1.06	0.47	HG78X12TBB
7/8x18	7,200	5.27	21.09	18.63	1.23	2.00	1.13	1.31	1.06	0.47	HG78X18TBB
1x6	10,000	3.32	9.00	6.18	1.41	2.45	1.25	1.50	1.25	0.60	HG1X6TBB
1x12	10,000	5.34	15.00	12.18	1.41	2.45	1.25	1.50	1.25	0.60	HG1X12TBB
1x18	10,000	7.35	21.00	18.18	1.41	2.45	1.25	1.50	1.25	0.60	HG1X18TBB
1x24	10,000	9.85	27.66	24.84	1.41	2.45	1.25	1.50	1.25	0.60	HG1X24TBB

Warning: Dimensions may vary

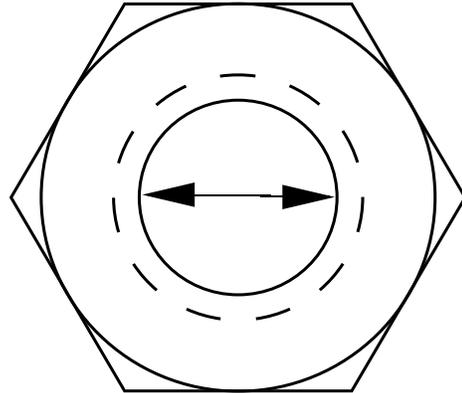


## Locknuts (Jam Nuts)

For Hot Dipped Galvanized Rod (Turnbuckles)

Size in	NC Threads Per Inch	Width Across Flat (A) in Inches	Weight Per Piece lbs	Part No.
1	8.00	1.50	0.18	HG1LN
1.25	7.00	1.81	0.37	HG114LN
1.5	6.00	2.19	0.60	HG112LN
1.75	5.00	2.56	1.02	HG134LN
2	4.50	2.94	2.25	HG2LN
2.5	4.00	3.75	3.13	HG212LN
2.75	4.00	4.13	3.30	HG234LN

Hot Dipped Galvanized  
Sold in L/R Pairs Only

Warning: Dimensions may vary


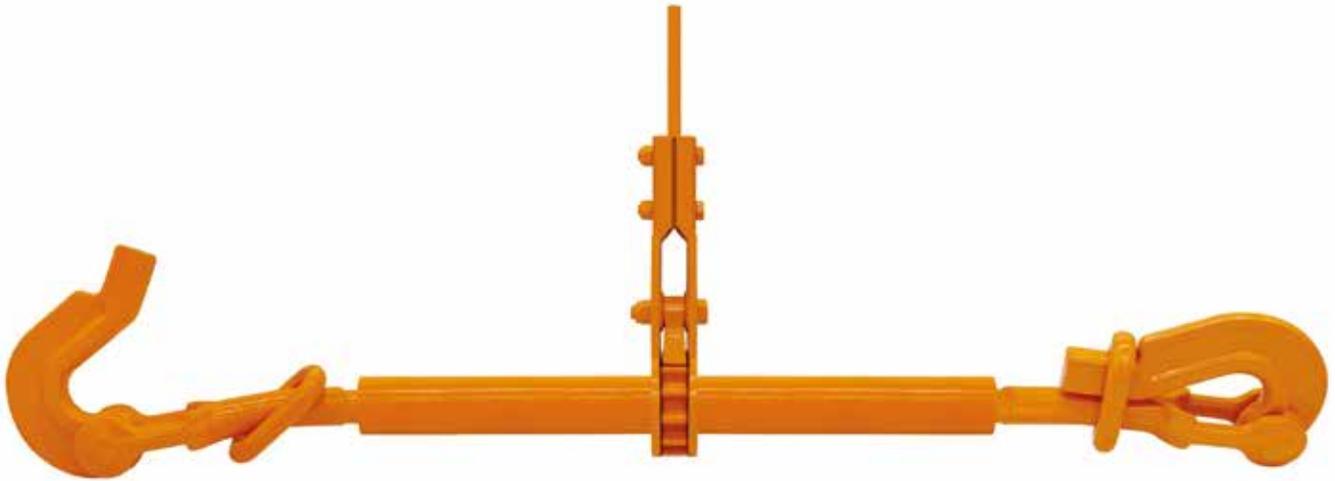


**Steamboat / River Ratchets**  
**with Pelican Hook Ends**

HARDWARE

Size x Take-Up	Working Load Limit in LBS	Min. Break Strength	Weight in LBS	Part Number
1-3/8 x 24	17,000	85,000	58.3	138X24FRR

Warning: Dimensions may vary

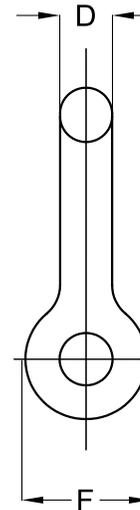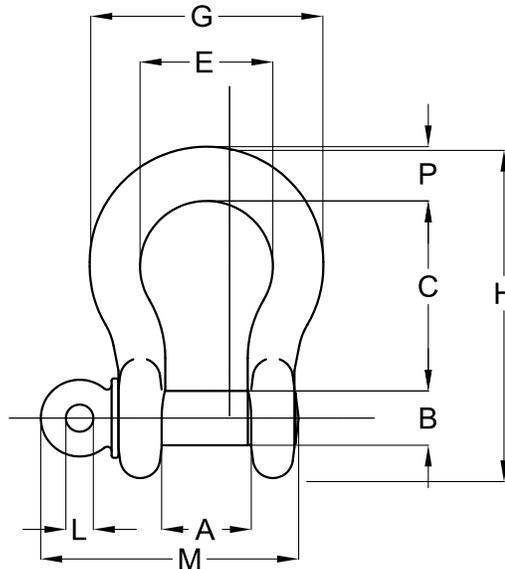


## Screw Pin Anchor Shackles

Hot Dipped Galvanized, Drop Forged, Carbon Steel  
To Federal Specification RR-C-271F, Type IVA, Grade A, Class 2

HARDWARE

Nominal Size	Working Load Limit	Dimensions (in)									Weight Per Piece in lbs	Part No.
		A	B	C	D	E	F	G	H	M		
in	Tons											
1/4	1/2	0.47	0.31	0.25	0.88	0.25	0.61	0.97	1.59	1.38	0.11	HG14SPAS
5/16	3/4	0.53	0.38	0.31	1.03	0.31	0.75	1.16	1.91	1.66	0.17	HG516SPAS
3/8	1	0.66	0.44	0.38	1.25	0.38	0.91	1.41	2.30	2.03	0.28	HG38SPAS
7/16	1 1/2	0.75	0.50	0.44	1.44	0.44	1.06	1.63	2.66	2.38	0.43	HG716SPAS
1/2	2	0.81	0.63	0.50	1.63	0.50	1.19	1.81	3.03	2.69	0.59	HG12SPAS
5/8	3 1/4	1.06	0.75	0.62	2.00	0.63	1.50	2.31	3.75	3.34	1.25	HG58SPAS
3/4	4 3/4	1.25	0.88	0.81	2.38	0.75	1.81	2.75	4.53	3.97	2.63	HG34SPAS
7/8	6 1/2	1.44	1.00	0.97	2.81	0.88	2.09	3.19	5.33	4.50	3.16	HG78SPAS
1	8 1/2	1.69	1.13	1.00	3.19	1.00	2.38	3.69	5.94	5.07	4.75	HG1SPAS
1 1/8	9 1/2	1.81	1.25	1.25	3.58	1.13	2.69	4.06	6.78	5.59	6.75	HG118SPAS
1 1/4	12	2.03	1.38	1.38	3.94	1.25	3.00	4.53	7.50	6.16	9.06	HG114SPAS
1 3/8	13 1/2	2.25	1.50	1.50	4.38	1.38	3.31	5.00	8.28	6.84	11.63	HG138SPAS
1 1/2	17	2.38	1.63	1.62	4.81	1.50	3.62	5.38	9.06	7.35	15.95	HG112SPAS
1 3/4	25	2.88	2.00	2.12	5.75	1.75	4.19	6.38	10.97	9.08	26.75	HG134SPAS
2	35	3.25	2.25	2.00	6.75	2.00	4.81	7.25	12.28	10.34	42.31	HG2SPAS
2 1/2	55	4.13	2.75	2.62	8.00	2.62	5.69	9.38	14.84	13.00	71.75	HG212SPAS

Warning: Dimensions may vary

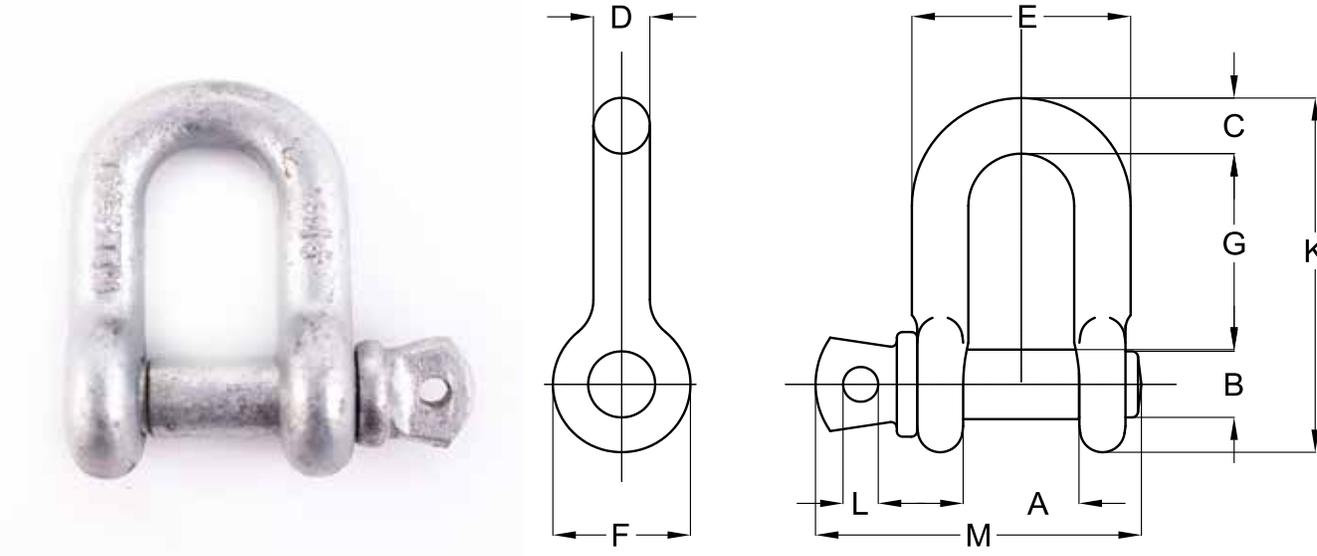


## Screw Pin Chain Shackles

Hot Dipped Galvanized, Drop Forged, Carbon Steel  
To Federal Specification RR-C-271F, Type IVB, Grade A, Class 2

Nominal Shackle Size	Weight Per Piece in	Working Load Limit	Dimensions (in)										Part No.
			A	B	C	D	E	F	G	K	L	M	
in	lbs	tons											
1/4	0.11	1/2	0.47	0.31	0.25	0.25	0.97	0.62	0.97	1.59	0.19	1.43	HG14SPCS
5/16	0.17	3/4	0.53	0.38	0.31	0.31	1.15	0.75	1.07	1.91	0.22	1.71	HG516SPCS
3/8	0.28	1	0.66	0.44	0.38	0.38	1.42	0.92	1.28	2.31	0.25	2.02	HG38SPCS
7/16	0.43	1 1/2	0.75	0.50	0.44	0.44	1.63	1.06	1.48	2.67	0.31	2.37	HG716SPCS
1/2	0.59	2	0.81	0.63	0.50	0.50	1.81	1.18	1.66	3.03	0.38	2.69	HG12SPCS
5/8	1.25	3 1/4	1.06	0.75	0.63	0.63	2.32	1.50	2.04	3.76	0.44	3.34	HG58SPCS
3/4	2.63	4 3/4	1.25	0.88	0.81	0.75	2.75	1.81	2.40	4.53	0.50	3.97	HG34SPCS
7/8	3.16	6 1/2	1.44	1.00	0.97	0.88	3.20	2.10	2.86	5.33	0.50	4.50	HG78SPCS
1	4.75	8 1/2	1.69	1.13	1.00	1.00	3.69	2.38	3.24	5.94	0.56	5.13	HG1SPCS
1 1/8	6.75	9 1/2	1.81	1.25	1.25	1.13	4.07	2.69	3.61	6.78	0.63	5.71	HG118SPCS
1 1/4	9.06	12	2.03	1.38	1.38	1.25	4.53	3.00	3.97	7.50	0.69	6.25	HG114SPCS
1 3/8	11.63	13 1/2	2.25	1.50	1.50	1.38	5.01	3.31	4.43	8.28	0.75	6.53	HG138SPCS
1 1/2	15.95	17	2.38	1.63	1.62	1.50	5.38	3.62	4.87	9.05	0.81	7.33	HG112SPCS
1 3/4	26.75	25	2.88	2.00	2.12	1.75	6.38	4.19	5.78	10.97	1.00	9.06	HG134SPCS
2	42.31	35	3.25	2.25	2.36	2.10	7.25	5.00	6.77	12.74	1.13	10.35	HG2SPCS

Warning: Dimensions may vary

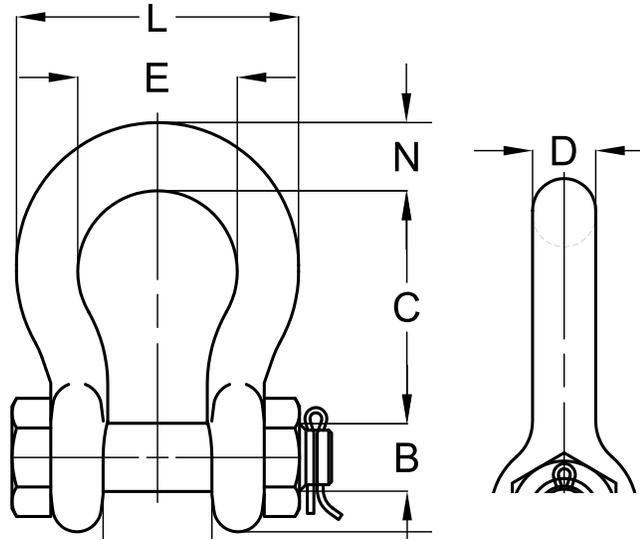



## Bolt Type Anchor Shackles Safety

Hot Dipped Galvanized, Drop Forged, Carbon Steel  
To Federal Specification RR-C-271F Type IVA, Grade A, Class 3

HARDWARE

Nominal Shackle Size	Weight Per Piece in	Working Load Limit	Dimensions (in)									Part No.
			A	B	C	D	E	F	H	L	N	
in	lbs	tons										
5/16	0.22	3/4	0.53	0.38	1.22	0.31	0.84	0.75	2.09	1.47	0.31	HG516BTAS
3/8	0.33	1	0.66	0.44	1.44	0.38	1.03	0.91	2.49	1.78	0.38	HG38BTAS
1/2	0.79	2	0.81	0.64	1.88	0.50	1.31	1.19	3.28	2.31	0.50	HG12BTAS
5/8	1.68	3 1/4	1.06	0.77	2.38	0.63	1.69	1.50	4.19	2.94	0.69	HG58BTAS
3/4	2.72	4 3/4	1.25	0.89	2.81	0.75	2.00	1.81	4.97	3.50	0.81	HG34BTAS
7/8	3.95	6 1/2	1.44	1.02	3.31	0.88	2.28	2.09	5.83	4.03	0.97	HG78BTAS
1	5.66	8 1/2	1.69	1.15	3.75	1.00	2.69	2.38	6.56	4.69	1.06	HG1BTAS
1 1/8	8.27	9 1/2	1.81	1.25	4.25	1.13	2.91	2.69	7.47	5.16	1.25	HG118BTAS
1 1/4	11.71	12	2.03	1.40	4.69	1.29	3.25	3.00	8.25	5.75	1.38	HG114BTAS
1 3/8	15.83	13 1/2	2.25	1.53	5.25	1.42	3.63	3.31	9.16	6.38	1.50	HG138BTAS
1 1/2	19	17	2.38	1.66	5.75	1.53	3.88	3.63	10.00	6.88	1.62	HG112BTAS
1 3/4	33.91	25	2.88	2.04	7.00	1.84	5.00	4.19	12.34	8.80	2.25	HG134BTAS
2	52.25	35	3.25	2.30	7.75	2.08	5.75	4.81	13.68	10.15	2.40	HG2BTAS
2 1/2	98.25	55	4.13	2.80	10.50	2.71	7.25	5.69	17.90	12.75	3.13	HG212BTAS
3	154	85	5.00	3.30	13.00	3.12	7.88	6.50	21.50	14.62	3.62	HG3BTAS

Warning: Dimensions may vary

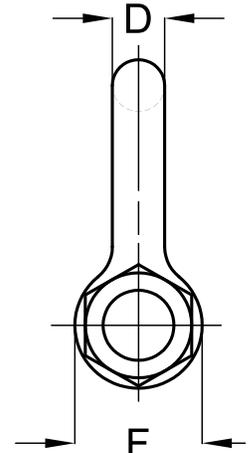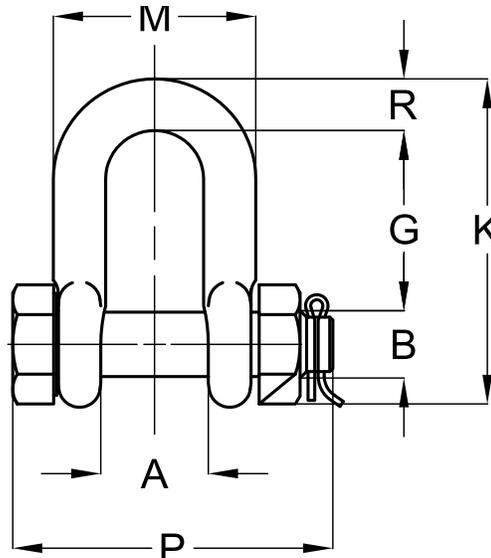

**Bolt Type Chain Shackles Safety**

Hot Dipped Galvanized, Drop Forged, Carbon Steel  
To Federal Specification RR-C-271F Type IVB, Grade A, Class 3



Nominal Shackle Size	Weight Per Piece in	Working Load Limit	Dimensions (in)									Part No.
			A	B	D	F	G	K	M	P	R	
in	lbs	tons										
3/8	0.33	1	0.66	0.44	0.38	0.92	1.28	2.31	1.42	2.17	0.38	HG38BTCS
1/2	0.79	2	0.81	0.64	0.50	1.18	1.66	3.03	1.81	2.80	0.50	HG12BTCS
5/8	1.68	3 1/4	1.06	0.77	0.63	1.50	2.04	3.76	2.32	3.56	0.63	HG58BTCS
3/4	2.72	4 3/4	1.25	0.89	0.75	1.81	2.40	4.53	2.75	4.15	0.81	HG34BTCS
7/8	3.95	6 1/2	1.44	1.02	0.88	2.10	2.86	5.33	3.20	4.82	0.97	HG78BTCS
1	5.66	8 1/2	1.69	1.15	1.00	2.38	3.24	5.94	3.69	5.39	1.00	HG1BTCS
1 1/8	8.27	9 1/2	1.81	1.25	1.13	2.68	3.61	6.78	4.07	5.90	1.25	HG118BTCS
1 1/4	11.71	12	2.03	1.40	1.25	3.00	3.97	7.50	4.53	6.69	1.38	HG114BTCS
1 3/8	15.83	13 1/2	2.25	1.53	1.38	3.31	4.43	8.28	5.01	7.21	1.50	HG138BTCS
1 1/2	19.00	17	2.38	1.66	1.50	3.62	4.87	9.05	5.38	7.73	1.62	HG112BTCS
1 3/4	33.91	25	2.88	2.04	1.75	4.19	5.82	10.97	6.38	9.33	2.12	HG134BTCS
2	52.25	35	3.25	2.30	2.10	5.00	6.82	12.74	7.25	10.41	2.36	HG2BTCS
2 1/2	98.25	55	4.12	2.80	2.63	5.68	8.07	14.85	9.38	13.58	2.63	HG212BTCS
3	154.00	85	5.00	3.25	3.00	6.50	8.56	16.87	11.00	15.13	3.50	HG3BTCS

Warning: Dimensions may vary

## Regular Nut Eye Bolts


Drop Forged, Hot Dipped Galvanized  
Meets or exceeds all requirements of ASME B30.26

Bolt Dia. & Shank Length	Working Load Limit	Weight Per Piece in	Dimensions (in)								Part No.
			A	B	C	D	E	F	G	H	
in	lbs	lbs									
1/4x2	650	0.08	0.25	0.50	1.00	0.25	1.50	2.00	3.06	0.56	HG14X2RN
1/4x4	650	0.12	0.25	0.50	1.00	0.25	2.50	4.00	5.06	0.56	HG14X4RN
5/16x2 1/4	1,200	0.13	0.31	0.62	1.25	0.31	1.50	2.25	3.56	0.69	HG516X214RN
5/16x4 1/4	1,200	0.25	0.31	0.62	1.25	0.31	2.50	4.25	5.56	0.69	HG516X414RN
5/16x6	1,200	0.31	0.31	0.62	1.25	0.31	3.00	6.00	7.25	0.69	HG516X6RN
3/8x1 1/4	1,550	0.21	0.38	0.62	1.50	0.38	1.25	1.25	3.00	0.88	HG38X114RN
3/8x2 1/2	1,550	0.24	0.38	0.75	1.50	0.38	1.50	2.50	4.12	0.88	HG38X212RN
3/8x3	1,550	0.26	0.38	0.75	1.50	0.38	1.50	3.00	4.50	0.88	HG38X3RN
3/8x4 1/2	1,550	0.29	0.38	0.75	1.50	0.38	2.50	4.50	6.12	0.88	HG38X412RN
3/8x6	1,550	0.35	0.38	0.75	1.50	0.38	2.50	6.00	7.62	0.88	HG38X6RN
3/8x8	1,550	0.42	0.38	0.75	1.50	0.38	2.50	8.00	9.75	0.88	HG38X8RN
1/2x2	2,600	0.48	0.50	1.00	2.00	0.50	1.50	2.00	4.00	1.12	HG12X2RN
1/2x3 1/4	2,600	0.51	0.50	1.00	2.00	0.50	1.50	3.25	5.38	1.12	HG12X314RN
1/2x4 1/2	2,600	0.55	0.50	1.00	2.00	0.50	1.50	3.50	6.50	1.12	HG12X412RN
1/2x6	2,600	0.66	0.50	1.00	2.00	0.50	3.00	6.00	8.12	1.12	HG12X6RN
1/2x8	2,600	0.82	0.50	1.00	2.00	0.50	3.00	8.00	10.12	1.12	HG12X8RN
1/2x10	2,600	0.88	0.50	1.00	2.00	0.50	3.00	10.00	12.12	1.12	HG12X10RN
1/2x12	2,600	1.14	0.50	1.00	2.00	0.50	3.00	12.00	14.12	1.12	HG12X12RN
5/8x4	5,200	1.03	0.62	1.25	2.50	0.62	2.00	4.00	6.69	1.44	HG58X4RN
5/8x6	5,200	1.18	0.62	1.25	2.50	0.62	3.00	6.00	8.69	1.44	HG58X6RN
5/8x8	5,200	1.35	0.62	1.25	2.50	0.62	3.00	8.00	10.69	1.44	HG58X8RN
5/8x10	5,200	1.54	0.62	1.25	2.50	0.62	3.00	10.00	12.69	1.44	HG58X10RN
5/8x12	5,200	1.67	0.62	1.25	2.50	0.62	4.00	12.00	14.69	1.44	HG58X12RN
5/8x15	5,200	1.92	0.62	1.25	2.50	0.62	5.25	15.00	17.75	1.44	HG58X15RN
3/4x4 1/2	7,200	1.69	0.75	1.50	3.00	0.75	2.00	4.50	7.69	1.69	HG34X412RN
3/4x6	7,200	1.85	0.75	1.50	3.00	0.75	3.00	6.00	9.19	1.69	HG34X6RN
3/4x8	7,200	2.08	0.75	1.50	3.00	0.75	3.00	8.00	11.19	1.69	HG34X8RN
3/4x10	7,200	2.35	0.75	1.50	3.00	0.75	3.00	10.00	13.19	1.69	HG34X10RN
3/4x12	7,200	2.58	0.75	1.50	3.00	0.75	4.00	12.00	15.19	1.69	HG34X12RN
3/4x15	7,200	2.98	0.75	1.50	3.00	0.75	5.00	15.00	18.19	1.69	HG34X15RN
3/4x18	7,200	3.38	0.75	1.50	3.00	0.75	7.25	18.00	21.50	1.69	HG34X18RN
7/8x5	10,600	2.70	0.88	1.75	3.50	0.88	2.50	5.00	8.75	2.00	HG78X5RN
7/8x8	10,600	3.08	0.88	1.75	3.50	0.88	4.00	8.00	11.75	2.00	HG78X8RN
7/8x12	10,600	4.00	0.88	1.75	3.50	0.88	4.00	12.00	15.75	2.00	HG78X12RN
1x6	13,300	4.21	1.00	2.00	4.00	1.00	3.00	6.00	10.31	2.31	HG1X6RN
1x9	13,300	4.69	1.00	2.00	4.00	1.00	4.00	9.00	13.31	2.31	HG1X9RN
1x12	13,300	5.40	1.00	2.00	4.00	1.00	4.00	12.00	16.31	2.31	HG1X12RN
1x18	13,300	6.50	1.00	2.00	4.00	1.00	7.00	18.00	22.31	2.31	HG1X18RN
1 1/4x8	21,000	7.50	1.25	2.50	5.00	1.25	4.00	8.00	13.38	2.88	HG114X8RN
1 1/4x12	21,000	9.00	1.25	2.50	5.00	1.25	4.00	12.00	17.38	2.88	HG114X12RN
1 1/4x20	21,000	12.10	1.25	2.50	5.00	1.25	6.00	20.00	25.38	2.88	HG114X20RN
1 1/2x15	30,000	14.00	1.50	3.00	6.00	1.50	6.00	15.00	21.00	3.00	HG112X15RN

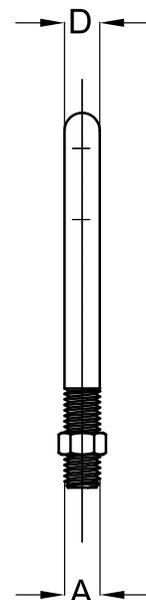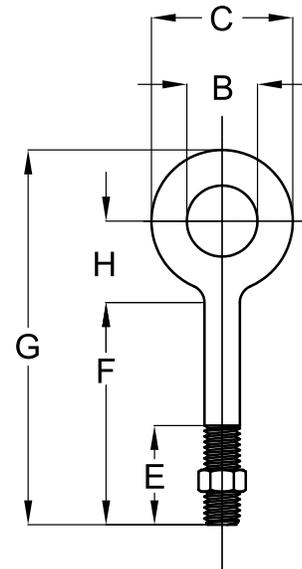

HARDWARE

Warning: Dimensions may vary

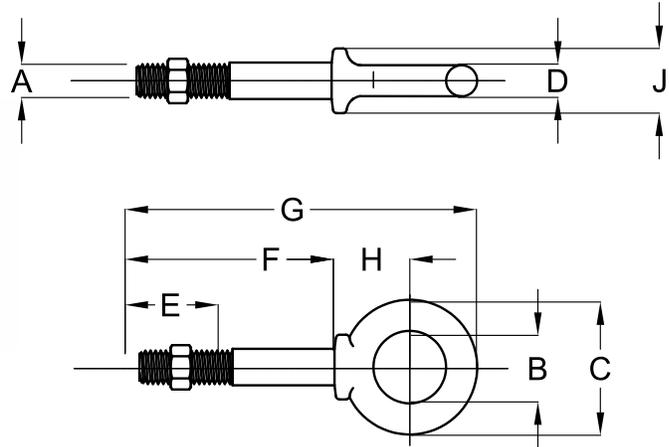


## Shoulder Nut Eye Bolts

Forged Carbon Steel, Hot Dipped Galvanized  
Meets or exceeds all requirements of ASME B30.26

Bolt Dia. & Shank Length	Working Load Limit	Weight Per Piece in	Dimensions (in)									Part No.
			A	B	C	D	E	F	G	H	J	
in	lbs	lbs										
1/4X2	500	0.07	0.25	0.50	0.88	0.19	1.50	2.00	2.94	0.50	0.47	HG14X2SN
1/4X4	500	0.09	0.25	0.50	0.88	0.19	2.50	4.00	4.94	0.50	0.47	HG14X4SN
5/16X2 1/4	800	0.13	0.31	0.62	1.12	0.25	1.50	2.25	3.50	0.69	0.56	HG516X214SN
5/16X4 1/4	800	0.19	0.31	0.62	1.12	0.25	2.50	4.25	5.50	0.69	0.56	HG516X414SN
3/8X2 1/2	1,200	0.21	0.38	0.75	1.38	0.31	1.50	2.50	3.97	0.78	0.66	HG38X212SN
3/8X4 1/2	1,200	0.25	0.38	0.75	1.38	0.31	2.50	4.50	5.97	0.78	0.66	HG38X412SN
1/2X3 1/4	2,200	0.43	0.50	1.00	1.75	0.38	1.50	3.25	5.12	1.00	0.91	HG12X314SN
1/2X6	2,200	0.57	0.50	1.00	1.75	0.38	3.00	6.00	7.88	1.00	0.91	HG12X6SN
5/8X4	3,500	0.69	0.62	1.25	2.25	0.50	2.00	4.00	6.44	1.31	1.12	HG58X4SN
5/8X6	3,500	1.02	0.62	1.25	2.25	0.50	3.00	6.00	8.44	1.31	1.12	HG58X6SN
3/4X4 1/2	5,200	1.25	0.75	1.50	2.75	0.62	2.00	4.50	7.44	1.56	1.38	HG34X412SN
3/4X6	5,200	1.50	0.75	1.50	2.75	0.62	3.00	6.00	8.94	1.56	1.38	HG34X6SN
7/8X5	7,200	2.25	0.88	1.75	3.25	0.75	2.50	5.00	8.47	1.84	1.56	HG78X5SN
1X6	10,000	3.75	1.00	2.00	3.75	0.88	3.00	6.00	9.97	2.09	1.81	HG1X6SN
1X9	10,000	4.29	1.00	2.00	3.75	0.88	4.00	9.00	12.97	2.09	1.81	HG1X9SN
1 1/4X8	15,200	6.50	1.25	2.50	4.50	1.00	4.00	8.00	12.72	2.47	2.28	HG114X8SN
1 1/4X12	15,200	7.75	1.25	2.50	4.50	1.00	4.00	12.00	16.72	2.47	2.28	HG114X12SN
1 1/2X15	21,400	14.25	1.50	3.00	5.50	1.25	6.00	15.00	20.75	3.00	2.75	HG112X15SN

Warning: Dimensions may vary

HARDWARE

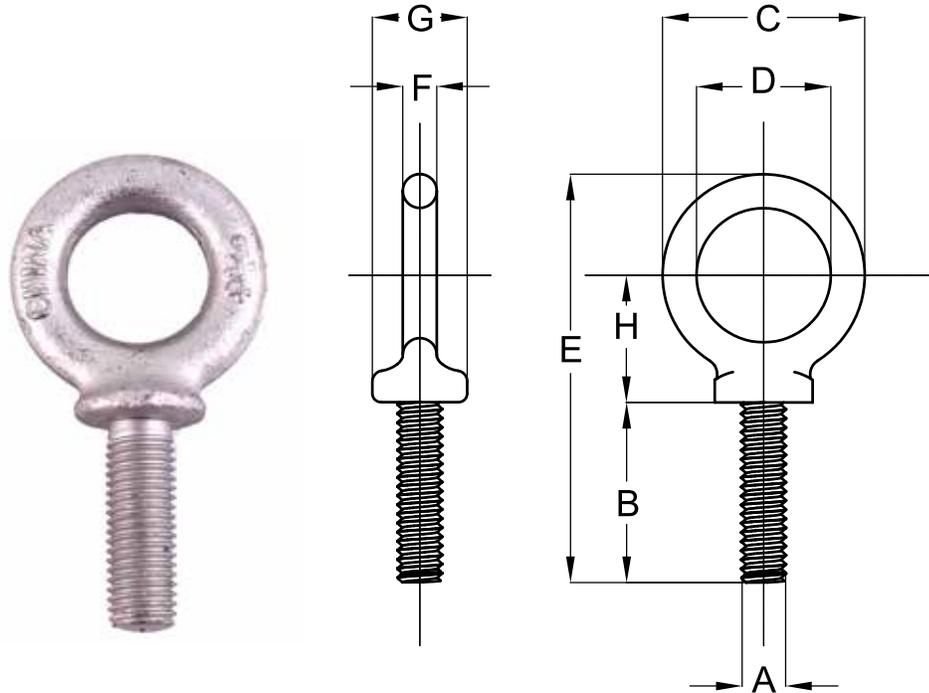

## Machinery Eye Bolt


Hot Galvanized and Self Colored

Meets or exceeds all requirements of ASME B30.26

HARDWARE

Shank Dia. & Take Up	Working Load Limit	Weight Per Piece in	Dimensions (in)								Hot Galvanized Part No.	Self Colored Part No.
			A	B	C	D	E	F	G	H		
in	lbs	lbs										
1/4x1	650	0.05	1/4"-20	1.02	1.13	0.75	2.29	0.19	0.53	0.70	HG14X1ME	SC14X1ME
5/16X1 1/8	1,200	0.09	5/16"-18	1.15	1.38	0.88	2.74	0.25	0.59	0.90	HG516X118ME	SC516X118ME
3/8X1 1/4	1,550	0.15	3/8"-16	1.27	1.62	1.00	3.07	0.31	0.69	1.00	HG38X114ME	SC38X114ME
1/2X1 1/2	2,600	0.28	1/2"-13	1.53	1.95	1.19	3.70	0.38	0.91	1.20	HG12X112ME	SC12X112ME
5/8X1 3/4	5,200	0.55	5/8"-11	1.79	2.38	1.38	4.45	0.50	1.13	1.47	HG58X134ME	SC58X134ME
3/4X2	7,200	0.96	3/4"-10	2.05	2.76	1.50	5.07	0.63	1.38	1.64	HG34X2ME	SC34X2ME
7/8X2 1/4	10,600	1.54	7/8"-9	2.31	3.25	1.75	5.87	0.75	1.56	1.94	HG78X214ME	SC78X214ME
1X2 1/2	13,300	2.38	1"-8	2.57	3.76	2.00	6.66	0.88	1.81	2.21	HG1X212ME	SC1X212ME
1 1/4X3	21,000	3.99	1-1/4"-7	3.09	4.50	2.50	7.95	1.00	2.28	2.61	HG114X3ME	SC114X3ME
1 1/2X3 1/2	24,000	7.20	1-1/2"-6	3.60	5.50	3.00	9.49	1.25	2.75	3.14	HG112X312ME	SC112X312ME

Warning: Dimensions may vary

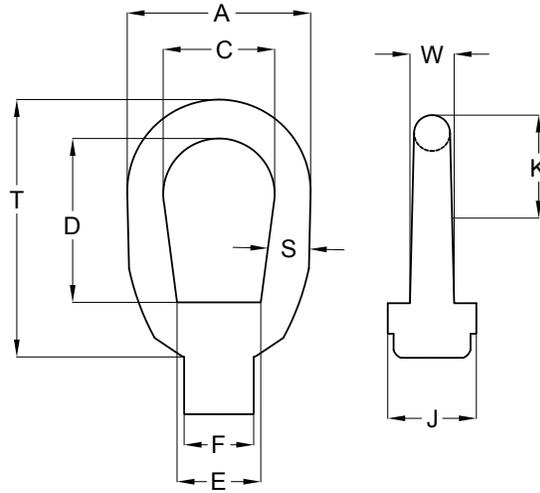


## Galvanized Eye Nuts

Drop Forged, Hot Dipped Galvanized  
Meets or exceeds all requirements of ASME B30.26

Size No.	Tap Size	Bail Size	Dimensions (in)							N	T	W	Working Load Limit	Weight Per Piece in	Part No.
			A	C	D	E	F	J	K						
	M												lbs	lbs	
1	1/4	1/4	1.25	0.75	1.00	0.75	0.50	0.69	0.63	0.46	1.72	0.31	1/4	0.09	DF1EN
2	3/8	5/16	1.62	1.00	1.20	0.83	0.56	0.81	0.89	0.58	2.09	0.41	3/8	0.17	DF2EN
3A	1/2	3/8	2.00	1.25	1.44	1.08	0.81	1.00	1.09	0.73	2.55	0.50	1/2	0.28	DF3AEN
4	5/8	1/2	2.50	1.50	1.92	1.35	1.00	1.31	1.31	0.83	3.25	0.69	5/8	0.60	DF4EN
5	3/4	5/8	3.00	1.75	2.28	1.59	1.12	1.50	1.57	1.05	3.96	0.84	3/4	1.00	DF5EN
6	7/8	3/4	3.50	2.00	2.50	1.96	1.38	1.88	1.77	1.14	4.40	1.00	7/8	1.65	DF6EN

Warning: Dimensions may vary


HARDWARE

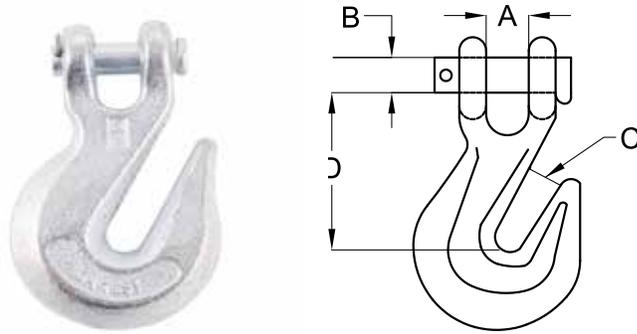

## Grade 43 High-Test Hooks Clevis Grab Hooks Forged Steel, Heat Treated

Size in	Working Load Limit lbs	Dimensions (in)				Weight Per Piece in lbs	Part No. Zinc Plated	Part No. Self-Colored
		A	B	C	D			
1/4	2,600	0.38	0.38	0.34	1.94	0.43	43CGH14	43CGH14SC
5/16	3,900	0.44	0.44	0.41	2.38	0.72	43CGH516	43CGH516SC
3/8	5,400	0.56	0.47	0.50	2.63	1.15	43CGH38	43CGH38SC
1/2	9,200	0.69	0.63	0.66	3.50	2.35	43CGH12	43CGH12SC
5/8	13,000	0.81	0.63	0.81	4.19	4.10	43CGH58	43CGH58SC


HARDWARE

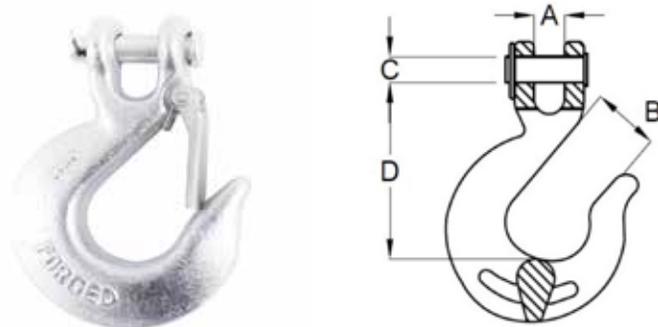

## Clevis Slip Hooks w/ Safety Latch Forged Steel, Heat Treated

Size in	Working Load Limit lbs	Dimensions (in)				Weight Per Piece in lbs	Part No. Zinc Plated	Part No. Self-Colored
		A	B	C	D			
1/4	1,950	0.38	0.27	0.88	2.56	0.50	43CSH14	43CSH14SC
5/16	2,875	0.44	0.44	1.00	2.81	0.75	43CSH516	43CSH516SC
3/8	4,000	0.56	0.47	1.28	3.25	1.20	43CSH38	43CSH38SC
1/2	6,500	0.63	0.56	1.38	4.00	2.80	43CSH12	43CSH12SC
5/8	9,250	0.75	0.75	2.00	4.81	6.00	43CSH58	43CSH58SC

Warning: Dimensions may vary

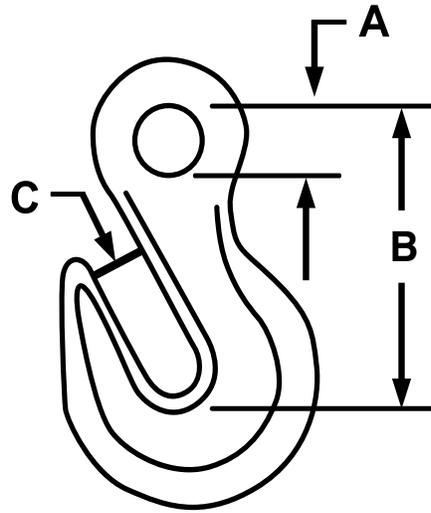

## Grade 43 High-Test Hooks


### Grade 43 Eye Grab Hooks Forged Steel, Zinc Plated Heat Treated

Size of Chain in	Working Load Limit lbs	Dimensions (in)			Weight Per Piece in lbs	Part No. Zinc Plated
		A	B	C		
1/4	2,600	0.50	0.34	1.97	0.28	43EGH14
5/16	3,900	0.56	0.44	2.25	0.45	43EGH516
3/8	5,400	0.66	0.50	2.56	0.79	43EGH38
7/16	7,200	0.75	0.56	2.94	1.19	43EGH716
1/2	9,200	0.88	0.66	3.38	1.80	43EGH12
5/8	13,000	1.06	0.78	4.11	3.30	43EGH58

**G43 forged carbon steel  
Quenched and tempered**

**Warning: Dimensions may vary**

HARDWARE

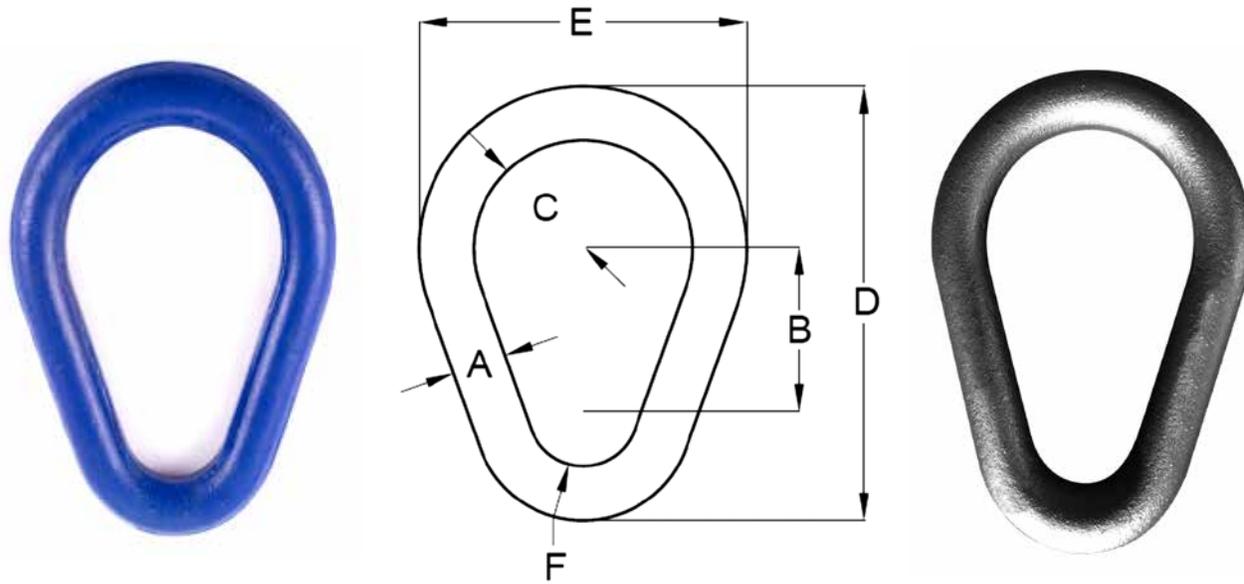


## Pear Shaped Sling Link - Grade 43 Hot Dipped Galvanized & Painted Blue

Size A	Working Load Limit	Weight Per Piece in	Dimensions (in)					Part No. H.D.G.	Part No. Painted Blue
			B	C	D	E	F		
in	lbs	lbs							
3/8	1,800	0.23	1.13	0.75	3	2.25	0.38	43PSLG38	43PSL38
1/2	2,900	0.55	1.5	1	4	3	0.5	43PSLG12	43PSL12
5/8	4,200	1.06	1.87	1.25	5	3.75	0.63	43PSLG58	43PSL58
3/4	6,000	1.88	2.25	1.5	6	4.5	0.75	43PSLG34	43PSL34
7/8	8,300	2.75	2.63	1.75	7	5.25	0.88	43PSLG78	43PSL78
1	10,800	4.35	3	2	8	6	1	43PSLG1	43PSL1

Warning: Dimensions may vary

HARDWARE

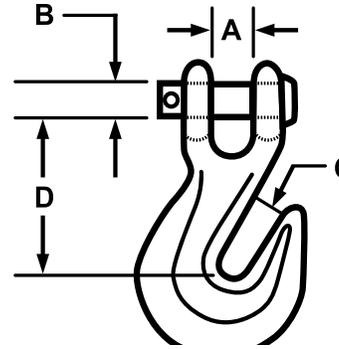


## Grade 70 Transport Hooks

### Clevis Grab Hooks

Forged Steel, Heat Treated, Yellow Chromate

Size in	Working Load Limit LBS	Dimensions (in)				Weight Per Piece in LBS	Part No.
		A	B	C	D		
1/4	3,150	0.43	0.38	0.38	0.34	1.94	14G70CGH
5/16	4,700	0.72	0.44	0.44	0.41	2.38	516G70CGH
3/8	6,600	1.15	0.56	0.47	0.50	2.63	38G70CGH
1/2	11,300	2.35	0.69	0.63	0.66	3.50	12G70CGH
5/8	15,300	4.20	0.94	0.75	0.78	4.09	58G70CGH

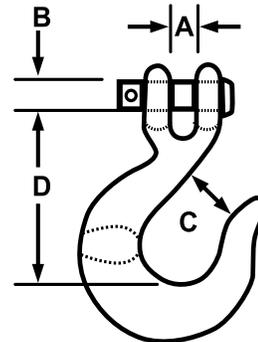


## Clevis Slip Hooks w/ Safety Latch

Forged Steel, Heat Treated, Yellow Chromate

Size in	Working Load Limit LBS	Dimensions (in)				Weight Per Piece in LBS	Part No.
		A	B	C	D		
1/4	2,600	0.38	0.38	0.34	1.94	0.43	14G70CSH
5/16	3,900	0.44	0.44	0.41	2.38	0.72	516G70CSH
3/8	5,400	0.56	0.47	0.50	2.63	1.15	38G70CSH
1/2	9,200	0.69	0.63	0.66	3.50	2.35	12G70CSH
5/8	11,500	0.81	0.63	0.81	4.19	4.10	58G70CSH

Warning: Dimensions may vary

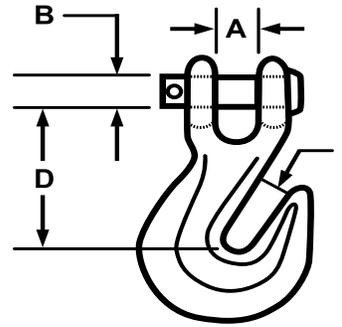


## Grade 80 Alloy Hooks

### Clevis Grab Hooks W/ Cradle Forged Steel, Heat Treated, Painted Red

Size in	Working Load Limit lbs	Dimensions (in)					Weight Per Piece in lbs	Part No.
		A	B	C	D	E		
9/32 - 5/16	4,500	0.35	0.35	0.39	1.97	1.18	0.60	932G80CGH
3/8	7,100	0.51	0.51	0.51	2.83	1.73	1.65	38G80CGH
1/2	12,000	0.67	0.63	0.67	3.46	2.06	2.97	12G80CGH
5/8	18,100	0.83	0.82	0.79	4.01	2.52	6.16	58G80CGH
3/4	28,300	0.94	0.94	0.94	4.60	3.34	10.56	34G80CGH


HARDWARE

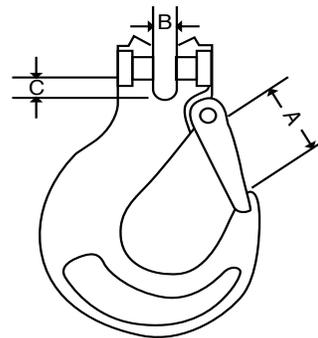

### Clevis Sling Hooks w/ Safety Latch Forged Steel, Heat Treated, Painted Red

Size in	Working Load Limit lbs	Dimensions (in)				Weight Per Piece in lbs	Part No.
		A	B	C	D		
3/8	7,100	0.48	0.51	1.20	4.13	2.09	38G80CSH
1/2	12,000	0.60	0.63	1.61	5.06	3.67	12G80CSH
5/8	18,100	0.75	0.82	1.97	6.11	6.60	58G80CSH
3/4	28,300	0.83	1.02	2.36	7.24	12.54	34G80CSH

Warning: Dimensions may vary

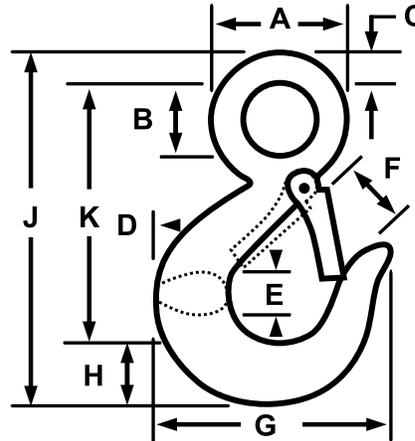


**Grade 80 Alloy Eye Hoist Hooks w/ Safety Latch**  
Forged Steel, Heat Treated, Painted Red

Working Load Limit	Dimensions (in)										Weight Per Piece in lbs	Part No.
	A	B	C	D	E	F	G	H	J	K		
1 tons	1.50	0.75	0.38	0.88	0.63	0.94	2.88	0.75	4.38	3.25	0.60	AEHH1T
1.5	1.75	0.88	0.44	1.00	0.69	1.06	3.13	0.81	4.88	3.63	0.82	AEHH1.5T
2	2.00	1.13	0.44	1.19	0.81	1.06	3.50	1.00	5.50	4.13	1.44	AEHH2T
3	2.38	1.25	0.59	1.38	0.94	1.22	3.94	1.19	6.31	4.56	1.94	AEHH3T
4.5	3.00	1.56	0.69	1.63	1.19	1.50	5.00	1.50	7.94	5.75	3.96	AEHH4.5T
7	3.81	2.00	0.88	2.06	1.50	1.88	6.25	1.75	10.00	7.38	7.75	AEHH7T
11	4.69	2.44	1.13	2.63	1.63	2.25	7.56	2.25	12.44	9.06	13.00	AEHH11T
15	5.37	2.84	1.26	2.94	2.19	2.51	8.30	2.59	13.93	10.07	10.00	AEHH15T
22	6.64	3.50	1.58	3.50	2.69	3.30	10.30	3.00	17.08	12.50	16.80	AEHH22T

Warning: Dimensions may vary

HARDWARE

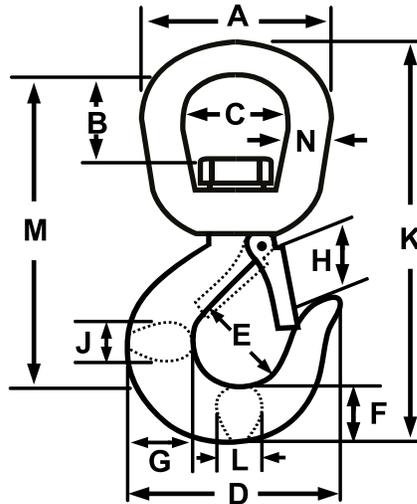


## Grade 80 Alloy Swivel Eye Hoist Hooks w/ Safety Latch

Forged Steel, Heat Treated, Painted Red

Working Load Limit	Dimensions (in)													Weight Per Piece in lbs	Part No.
	A	B	C	D	E	F	G	H	J	K	L	M	N		
2 tons	3.00	1.50	1.75	3.59	1.50	1.00	1.16	1.06	0.88	7.94	0.88	6.01	0.63	2.50	ASH2T
3	3.50	1.56	2.00	4.00	1.62	1.13	1.31	1.19	0.94	8.60	0.94	6.72	0.75	3.80	ASH3T
5	4.00	1.56	2.25	4.84	2.00	1.44	1.63	1.50	1.31	10.32	1.13	8.00	0.88	7.00	ASH5T
7	5.00	1.94	2.75	6.27	2.50	1.81	2.06	1.78	1.66	12.84	1.44	9.90	1.13	14.00	ASH7T
11	5.62	2.05	3.12	7.54	3.00	2.25	2.63	2.41	1.88	15.24	1.63	11.74	1.25	22.30	ASH11T
15	7.12	3.00	4.10	8.30	3.25	2.59	2.94	2.62	2.19	18.64	1.94	14.41	1.50	37.80	ASH15T

Warning: Dimensions may vary

HARDWARE

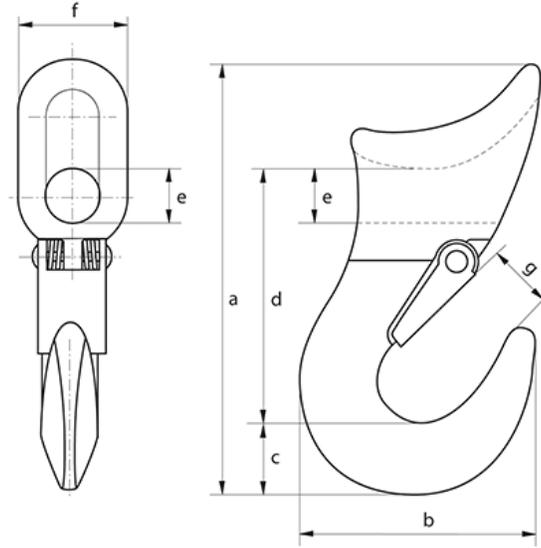


**Grade 80 Alloy Sliding Choker Hook**  
with Stainless Steel Latch

Size	Weight in LBS	Working Load Limit in LBS	A	B	C	D	E	F	G	H	L	P	R	AA	Part Numbers
1/2	1.4	3,520	2.25"	1.31"	.75"	2.97"	.78"	.50"	.97"	1.06"	4.97"	3.09"	.75"	1.50"	12G80SCH
5/8	3.0	4,400	3.06"	1.63"	.75"	3.56"	.94"	.56"	1.13"	1.31"	6.38"	3.88"	1.00"	2.00"	58G80SCH
3/4	4.4	6,600	3.38"	2.13"	1.00"	4.25"	1.16"	.63"	1.44"	1.63"	7.66"	4.58"	1.13"	2.50"	34G80SCH
7/8	9.7	11,000	4.41"	2.12"	1.25"	6.06"	1.41"	.88"	2.00"	2.33"	9.55"	5.72"	1.50"	3.00"	78G80SCH

HARDWARE

Warning: Dimensions may vary

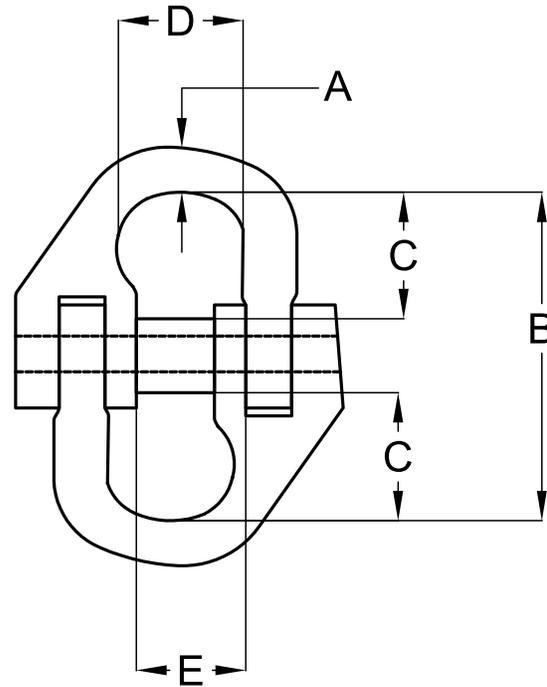


HARDWARE

## Coupling Links

### Grade 80 Alloy Connecting/Coupling Link Painted Red, Hammerlock Style

Size	Working Load Limit	Dimensions (in)					Weight Per Piece in	Part No.
		A	B	C	D	E		
in	lbs						lbs	
9/32	3,500	0.33	0.38	0.79	0.79	0.73	0.25	932G80CL
5/16	4,500	0.37	0.44	1.02	0.98	0.89	0.55	516G80CL
3/8	7,100	0.47	0.44	1.26	1.06	0.98	0.75	38G80CL
1/2	12,000	0.61	0.59	1.38	1.26	1.18	1.50	12G80CL
5/8	18,100	0.73	0.69	1.69	1.53	1.42	2.55	58G80CL
3/4	28,300	0.90	0.88	1.89	1.85	1.73	4.15	34G80CL
7/8	34,200	1.04	1.13	2.00	2.16	1.93	5.75	78G80CL
1	52,100	1.24	1.26	2.36	2.60	2.36	8.60	1G80CL

Warning: Dimensions may vary

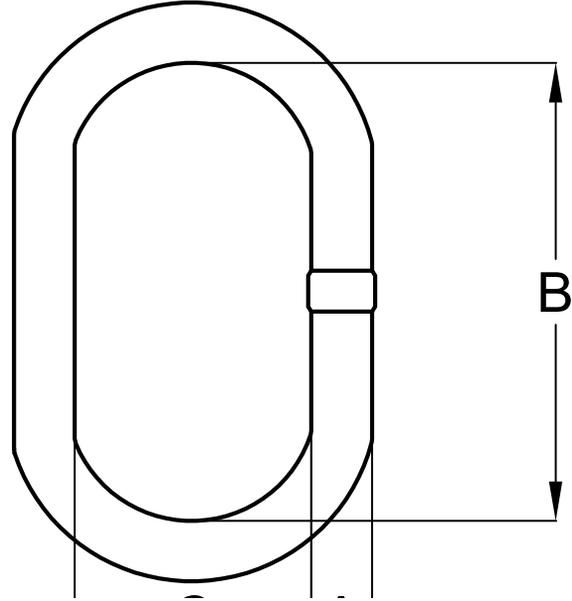


## Alloy Oblong Master Links

Grade 80 Alloy, Painted Red

To Specifications ASTM A952 & ASME B30.26 SPEC

Size	Working Load Limit	Weight Per Piece in	Dimensions (in)			Part No.
			A	B	C	
in	lbs	lbs				
1/2	7,400	0.82	0.62	2.80	5.00	12G80OML
5/8	9,000	1.52	0.62	3.00	6.00	58G80OML
3/4	12,300	2.07	0.73	3.20	6.00	34G80OML
7/8	15,200	3.31	0.88	3.75	6.38	78G80OML
1	26,000	4.85	1.10	4.30	7.50	1G80OML
1 1/4	39,100	9.57	1.33	5.50	9.50	114G80OML
1 1/2	61,100	16.22	1.61	5.90	10.50	112G80OML
1 3/4	84,900	25.22	1.75	6.00	12.00	134G80OML
2	102,600	37.04	2.00	7.00	14.00	2G80OML
2-1/2	160,000	68.50	2.50	8.00	16.00	212G80OML
3	228,000	115.00	3.00	9.00	18.00	3G80OML
3-1/2	279,000	200.00	3.50	12.00	24.00	312G80OML

Warning: Dimensions may vary

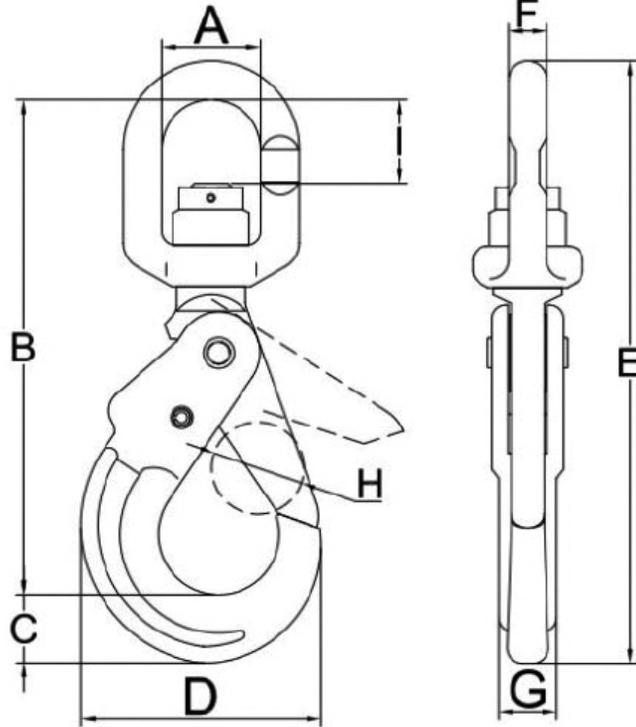


HARDWARE

## Grade 100 Alloy Self-Locking Swivel Hook

Size	Weight in LBS	Working Load Limit in LBS	R	A	B	O	D	G	H	T	Part Numbers
9/32(1/4)-5/16	2.43	5,700	7.17"	1.34"	1.06"	1.42"	0.51"	0.79"	1.02"	1.69"	14G100SLSH
3/8	4.41	8,800	8.54"	1.77"	1.38"	1.65"	0.63"	0.98"	1.18"	2.20"	38G100SLSH
1/2	8.82	15,000	10.67"	2.13"	1.69"	1.97"	0.83"	1.38"	1.57"	2.72"	12G100SLSH
5/8	14.99	22,600	12.60"	2.44"	2.44"	2.44"	0.94"	1.50"	1.97"	3.15"	58G100SLSH

Warning: Dimensions may vary

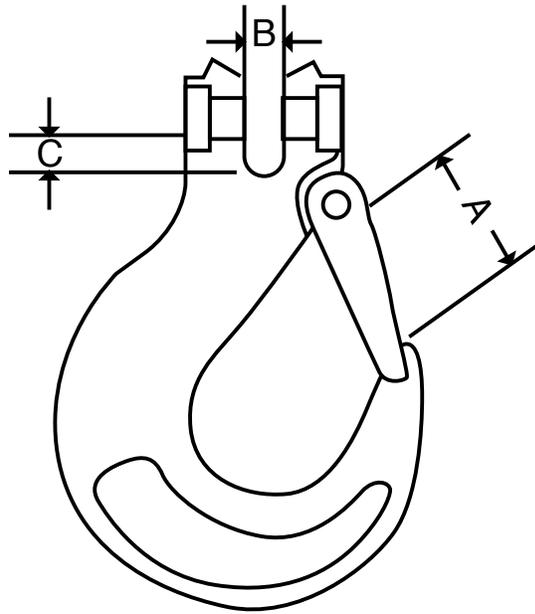


**Grade 100 Alloy Clevis Sling Hooks  
with Stainless Steel Latch**

HARDWARE

Size	Weight in LBS	Working Load Limit in LBS	A	A1	B	C	G	H	R	P(pin) X L	Part Numbers
9/32"(1/4")	1.21	4,300	1.34"	1.02"	0.37"	0.39"	0.75"	1.10"	3.74"	0.35" x 0.89"	932G100CSH
5/16"	1.36	5,700	1.34"	1.02"	0.37"	0.39"	0.75"	1.10"	3.74"	0.39" x 0.89"	516G100CSH
3/8"	2.59	8,800	1.57"	1.22"	0.47"	0.53"	0.98"	1.30"	4.33"	0.51" x 1.16"	38G100CSH
1/2"	4.66	15,000	2.01"	1.57"	0.59"	0.67"	1.18"	1.57"	5.35"	0.63" x 1.46"	12G100CSH
5/8"	7.67	22,600	2.20"	1.77"	0.71"	0.87"	1.46"	1.89"	6.10"	0.79" x 2.05"	58G100CSH
3/4"	11.02	35,300	2.36"	2.09"	0.91"	1.02"	2.01"	2.05"	7.28"	0.94" x 2.87"	34G100CSH

Warning: Dimensions may vary

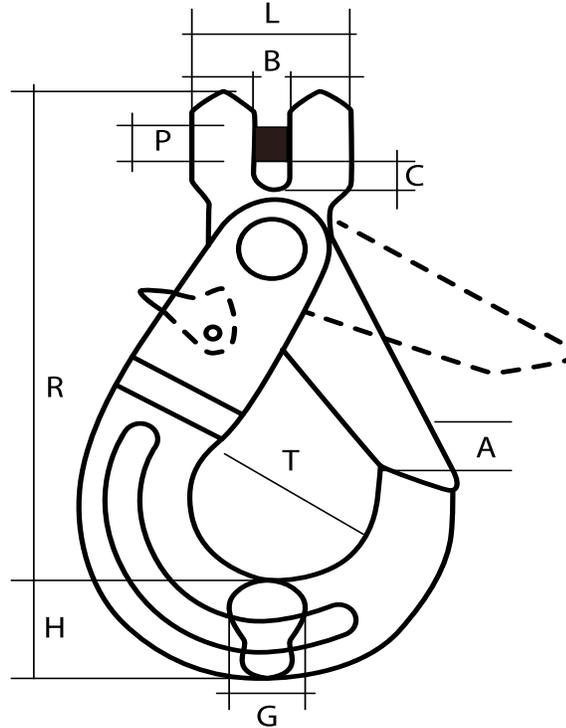


## Grade 100 Alloy Clevis Type Self-Locking Hooks

Size	Weight in LBS	Working Load Limit in LBS	A	B	C	G	H	R	T	P(pin) X L	Part Numbers
1/4"	1.10	3,000	1.10"	0.28"	0.31"	0.63"	0.83"	3.70"	1.38"	0.30 x 0.69"	14G100SLCH
5/16"	2.09	5,700	1.34"	0.35"	0.39"	0.79"	1.02"	4.84"	1.69"	0.39 x 0.89"	516G100SLCH
3/8"	3.53	8,800	1.77"	0.47"	0.55"	0.98"	1.18"	5.63"	2.20"	0.51 x 1.24"	38G100SLCH
1/2"	7.05	15,000	2.01"	0.59"	0.67"	1.38"	1.57"	7.09"	2.72"	0.63 x 1.65"	12G100SLCH

Warning: Dimensions may vary

HARDWARE

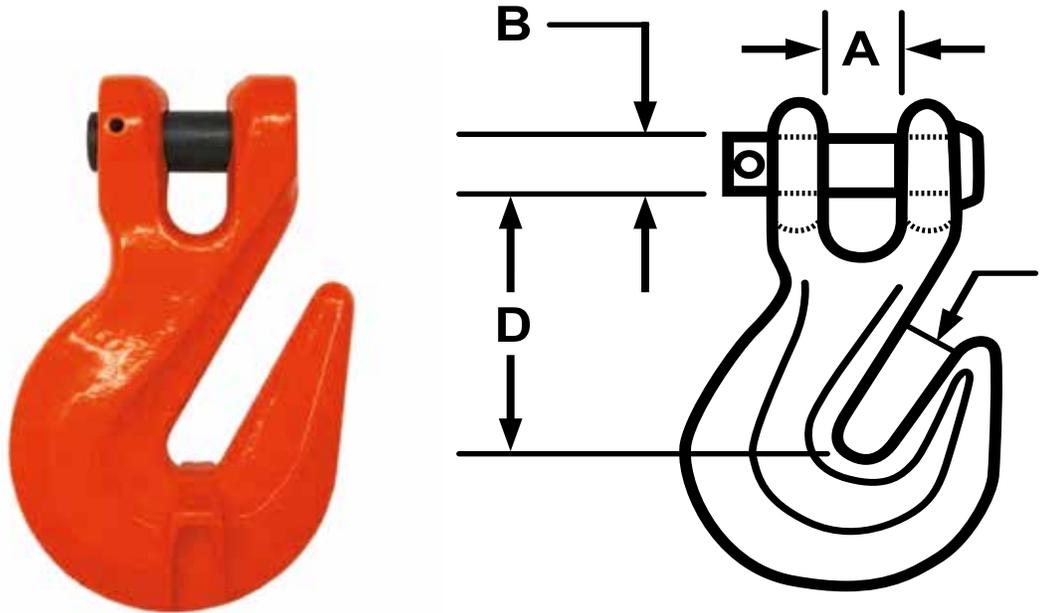


**Grade 100 Alloy Clevis Grab Hooks with Cradle**

HARDWARE

Size	Weight in LBS	Working Load Limit in LBS	A	B	C	G	H	R	M	P(pin) X L	Part Numbers
9/32"(1/4")	0.97	4,300	0.39"	0.39"	0.45"	1.18"	1.10"	2.58"	1.85"	0.35" x 0.89"	14G100CGH
5/16"	0.97	5,700	0.39"	0.39"	0.43"	1.18"	1.10"	2.56"	1.85"	0.39" x 0.89"	516G100CGH
3/8"	2.12	8,800	0.51"	0.51"	0.59"	1.73"	1.34"	3.15"	2.17"	0.51" x 1.24"	38G100CGH
1/2"	4.63	15,000	0.67"	0.67"	0.69"	2.09"	1.85"	4.15"	3.19"	0.63" x 1.65"	12G100CGH
5/8"	7.50	22,600	0.75"	0.75"	0.72"	2.52"	2.36"	4.40"	3.62"	0.83" x 2.03"	58G100CGH
3/4"	11.48	35,300	0.93"	0.91"	0.87"	3.35"	2.58"	4.85"	3.94"	0.94" x 2.42"	34G100CGH

\*\*The only difference between the 9/32" & 5/16" hooks is the pin size.


Warning: Dimensions may vary

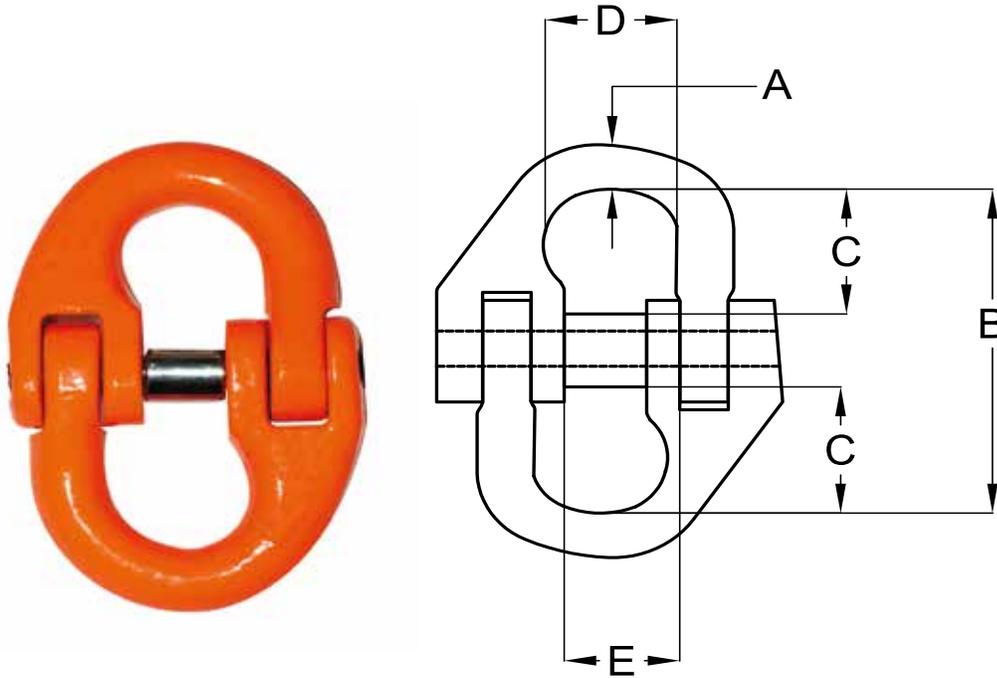

## Grade 100 Alloy Connecting/Coupling Links Hammerlock Style

Size	Weight in LBS	Working Load Limit in LBS	A	C	O	R	P	S	Part Numbers
1/4	0.15	3,000	0.55	0.71	0.71	1.77	0.31	0.30	14G100CL
5/16	0.44	5,700	0.71	0.98	0.91	2.44	0.47	0.37	516G100CL
3/8	0.77	8,800	0.91	1.18	1.06	2.78	0.47	0.47	38G100CL
1/2	1.63	15,000	1.06	1.54	1.34	3.54	0.79	0.67	12G100CL
5/8	2.58	22,800	1.30	1.57	1.54	4.13	0.87	0.81	58G100CL

Warning: Dimensions may vary

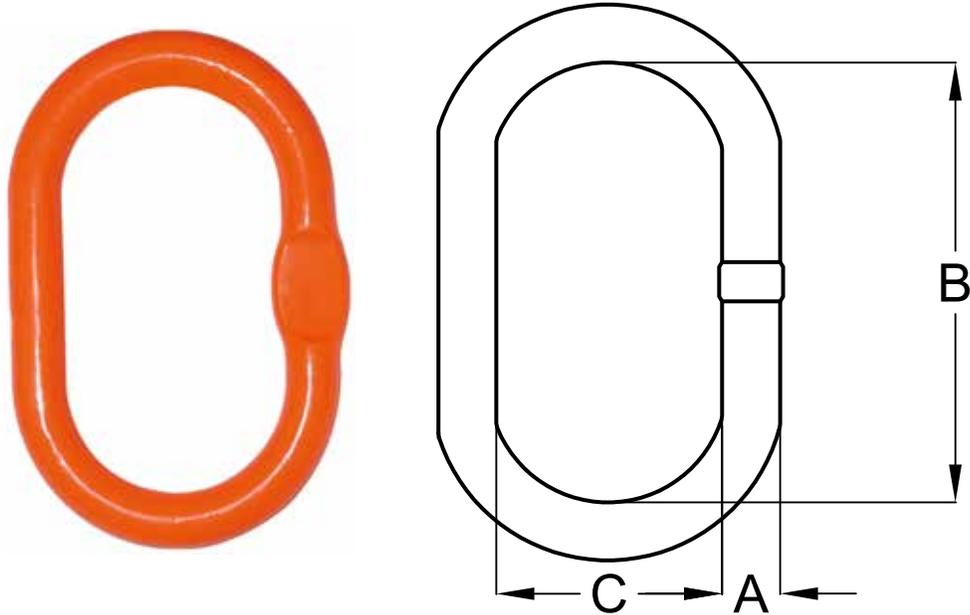


**Grade 100 Alloy Oblong Master Links**  
with an Engineered Flat

HARDWARE

Size	Weight in LBS	Working Load Limit in LBS	D	L	P	Part Numbers
1/2	0.82	30,000	0.62	2.80	5.00	12G100OML
5/8	1.52	45,200	0.62	3.00	6.00	58G100OML
3/4	2.07	70,600	0.73	3.20	6.00	34G100OML
7/8	3.50	85,400	1.10	4.30	7.50	78G100OML

Warning: Dimensions may vary

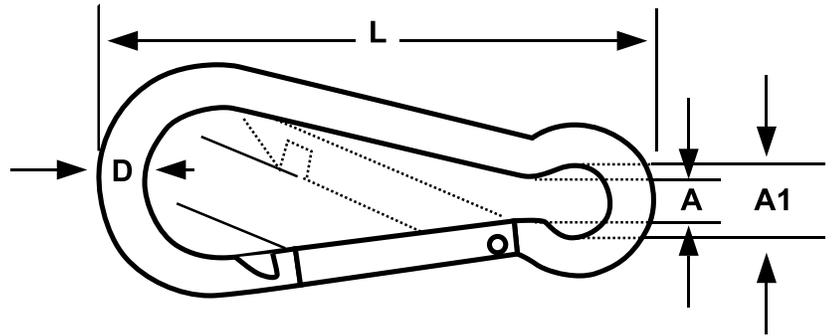

HARDWARE

## Spring Snap Hooks Electro Galvanized / Zinc Plated

Size	Length Overall	Snap Opening	Working Load Limit lbs	Weight Per Piece lbs	Part No.
3/16	2.13	0.25	220	0.044	EG316SH
1/4	2.50	0.32	260	0.077	EG14SH
5/16	3.13	0.31	500	0.172	EG516SH
3/8	4.00	0.50	550	0.243	EG38SH
1/2	5.50	0.75	1,200	0.551	EG12SH

Warning: Dimensions may vary

## Double Locking Hook



Breaking Strength in Lbs


5,000

Part No.

DL5000

HARDWARE


## S Hooks

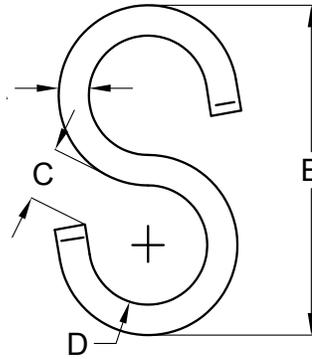

Size (A)	B	C	D	Working Load Limit (LBS)	Weight Per Piece in LBS	Part No. Type 316
1/8	1.38	.20	.42	50	.01	SSH18
5/32	1.59	.20	.51	80	.02	SSH532
3/16	1.90	.29	.63	120	.04	SSH316
1/4	2.25	.32	.70	200	0.06	SSH14
5/16	2.58	.46	.75	350	0.12	SSH516

Zinc Plated

Warning: Dimensions may vary

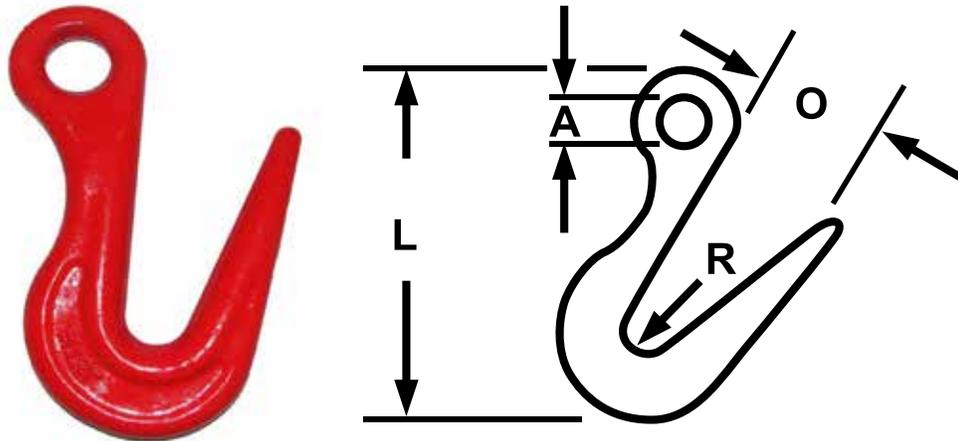

### Grade 80 Alloy Sorting Hooks

Working Load Limit at Tip tons	Working Load Limit at Bottom tons	Dimensions (in)				Weight Per Piece in lbs	Part No.
		A	L	O	R		
2	7.5	1.38	9.69	2.81	0.63	6.25	A2TSH

HARDWARE



### Snap Hooks



Forged Steel, Electro Galvanized, with Stainless Steel Latch

Size in	Working Load Limit lbs	Weight Per Piece in lbs	Dimensions (in)								Part No.
			A	B	C	D	E	F	G	H	
7/16	750	0.38	0.28	0.68	0.72	0.58	2.05	0.74	3.18	4.06	EG716SHH
9/16	1,000	0.50	0.34	1.12	0.76	0.55	2.16	0.88	3.86	4.76	EG916SHH

Warning: Dimensions may vary

**Quick / Rapid Links**  
Electro Galvanized/Zinc Plated

Size	Working	Dimensions (in)				Weight Per Piece in	Part No.
		A	B	C	D		
in	lbs					lbs	
1/8	400	0.19	1.45	0.39	1.19	0.02	EG18RL
3/16	660	0.25	2.06	0.50	1.69	0.05	EG316RL
1/4	880	0.31	2.38	0.56	1.88	0.08	EG14RL
5/16	1,760	0.38	2.94	0.69	2.31	0.18	EG516RL
3/8	2,200	0.44	3.19	0.69	2.44	0.24	EG38RL
1/2	3,300	0.56	4.25	0.94	3.25	0.53	EG12RL

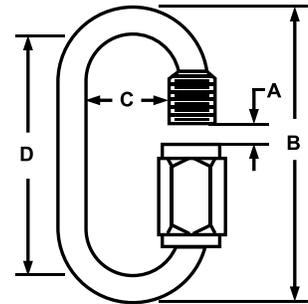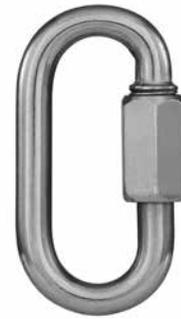

**Lap / Repair Links**  
Electro Galvanized

Size	Weight Per Piece in	Working Load Limit	Inside Length	Inside Width	Part No.
in	lbs	lbs			
1/8 x 3/4	0.01	190	0.78	0.36	18X34RL
3/16 x 1	0.03	240	1.00	0.50	316X1RL
1/4 x 1 1/4	0.07	400	1.25	0.50	14X114RL
5/16 x 1 1/2	0.13	950	1.50	0.75	516X112RL
3/8 x 1 5/8	0.23	1,250	1.63	0.75	38X158RL
1/2 x 2 1/2	0.53	2,125	2.00	1.00	12X212RL

Warning: Dimensions may vary


HARDWARE

## Missing Links

**Electro Galvanized/Zinc Plated  
Forged Steel- Quenched and Tempered**  
Meets or exceeds the performance requirement  
of Federal Specifications RRC-271S, Type II



Size	Working Load Limit	Dimensions (in)							Weight Per Piece in	Part No.
		A	B	C	D	E	F	G		
in	lbs								lbs	
3/16	800	0.25	0.69	0.34	0.34	1.19	0.78	0.28	0.03	EG316ML
1/4	1,325	0.28	0.88	0.44	0.44	1.50	1.00	0.31	0.06	EG14ML
5/16	1,950	0.34	0.94	0.47	0.47	1.69	1.16	0.38	0.13	EG516ML
3/8	2,750	0.41	1.13	0.56	0.56	2.06	1.38	0.47	0.20	EG38ML
1/2	4,750	0.53	1.47	0.66	0.66	2.66	1.72	0.59	0.38	EG12ML
5/8	7,250	0.66	1.81	0.78	0.81	3.31	2.09	0.75	0.73	EG58ML
3/4	10,250	0.78	2.13	0.94	1.06	3.88	2.50	0.88	1.23	EG34ML

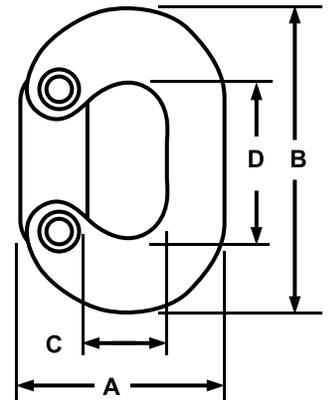

HARDWARE





## Cold Shuts

**Electro Galvanized**

Size	Working Load Limit	Inside Length	Inside Width	Weight Per Piece in	Part No.
in	lbs			lbs	
3/16	525	1.06	0.31	0.06	EG316CS
1/4	925	1.19	0.38	0.10	EG14CS
5/16	1,450	1.44	0.81	0.20	EG516CS
3/8	2,110	1.25	0.63	0.25	EG38CS
1/2"	3,700	1.88	0.75	0.38	EG12CS

Warning: Dimensions may vary

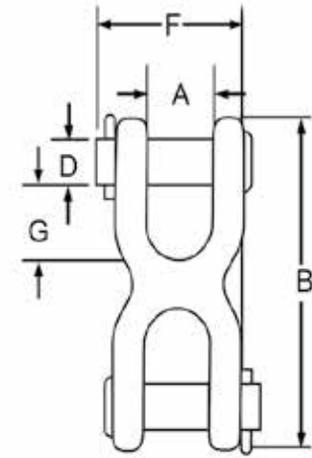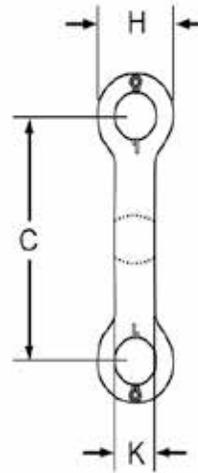


## Twin Clevis Links

Size	Working Load Limit	Dimensions (in)								Weight Per Piece in	Part No.
		A	B	C	D	F	G	H	K		
mm	lbs									lbs	
1/4 - 5/16	4,700	0.47	2.50	1.56	0.38	1.31	0.43	0.94	0.50	0.31	EG14TCL
3/8	6,600	0.53	2.81	1.81	0.44	1.53	0.50	1.00	0.56	0.44	EG38TCL
7/16 - 1/2	11,300	0.65	3.62	2.31	0.56	1.91	0.63	1.31	0.81	0.98	EG716TCL

All pins Alloy Steel  
Quenched and Tempered

**Warning: Dimensions may vary**

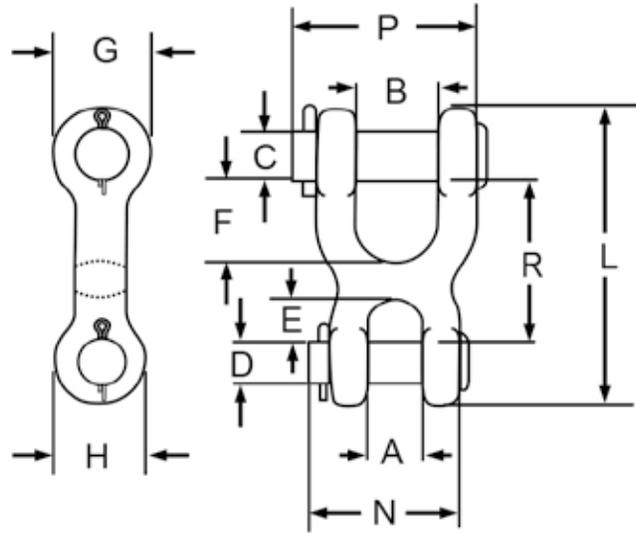


## Double Clevis Links

HARDWARE

Size	Working Load Limit	Dimensions (in)												Weight Per Piece in lbs	Part No.
		A	B	C	D	E	F	G	H	L	N	P	R		
mm	lbs														
1/4	2,600	0.50	0.75	0.50	0.31	0.38	0.75	1.00	0.81	2.81	1.38	1.66	1.50	0.38	EG14DCL
5/16 - 3/8	5,400	0.56	1.00	0.63	0.44	0.47	1.00	1.19	1.00	3.53	1.75	2.25	1.91	0.81	EG516DCL
7/16	7,200	0.69	1.13	0.69	0.56	0.59	1.09	1.31	1.19	4.06	2.00	2.50	2.19	1.25	EG716DCL
1/2	9,200	0.81	1.25	0.75	0.63	0.68	1.25	1.44	1.31	4.53	2.25	2.75	2.47	1.56	EG12DCL

All pins Alloy Steel  
Quenched and Tempered


Warning: Dimensions may vary

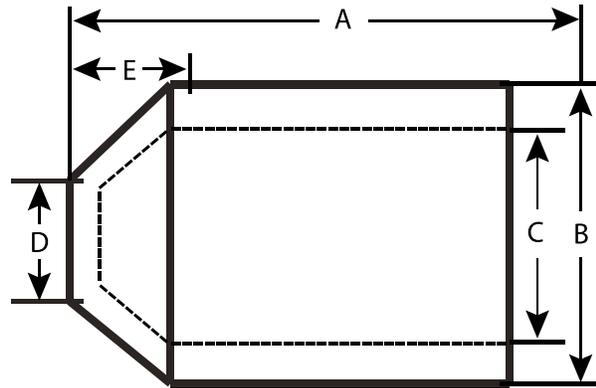

## Carbon Steel Tapered Sleeves (for Flemish Eyes) Zinc Plated

Size	Weight Per Piece in	Dimensions (in)					Part No.
		A	B	C	D	E	
in	lbs						
1/4	0.05	1.00	0.66	0.47	0.31	0.31	CSF14
5/16	0.15	1.50	0.91	0.62	0.44	0.44	CSF516
3/8	0.13	1.50	0.91	0.66	0.47	0.47	CSF38
7/16	0.33	2.00	1.22	0.85	0.55	0.55	CSF716
1/2	0.28	2.00	1.22	0.91	0.63	0.63	CSF12
9/16	0.64	2.75	1.47	1.03	0.69	0.69	CSF916
5/8	0.56	2.75	1.47	1.09	0.75	0.75	CSF58
3/4	0.90	3.19	1.72	1.28	0.91	0.91	CSF34
7/8	1.40	3.56	2.03	1.53	1.03	1.03	CSF78
1	1.90	4.00	2.28	1.72	1.16	1.16	CSF1
1 1/8	2.60	4.81	2.50	1.94	1.28	1.28	CSF118
1 1/4	3.50	5.19	2.78	2.16	1.44	1.44	CSF114
1 3/8	4.30	5.81	3.00	2.38	1.56	1.56	CSF138
1 1/2	5.00	6.25	3.25	2.63	1.69	1.69	CSF112
1 3/4	8.00	7.25	3.84	3.13	1.94	1.94	CSF134
2	12.00	8.50	4.38	3.63	2.25	2.25	CSF2
2 1/4	20.00	9.56	5.03	4.03	2.50	2.50	CSF214
2 1/2	24.00	10.50	5.50	4.50	2.75	2.75	CSF212
2 3/4	30.00	11.50	5.75	4.70	3.00	3.00	CSF234
3	31.00	12.00	6.00	5.00	3.25	3.25	CSF3

Warning: Dimensions may vary

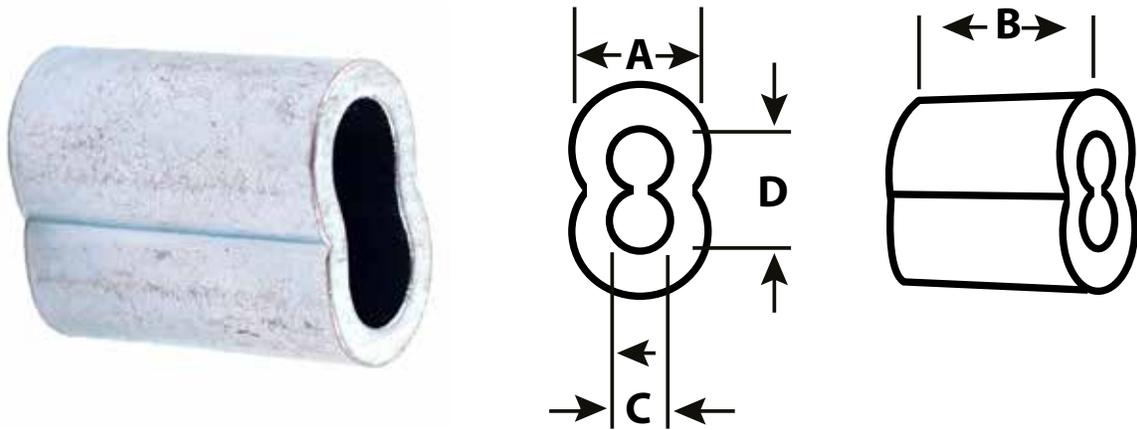



## Hourglass/Duplex Sleeves

Aluminum, Copper & Zinc over Copper  
To Federal Specification FF-C-450, Type III, Class I

Rope Size & Sleeve Size	Dimensions (in)				Weight Per Piece in lbs	Aluminum Part No.	Copper Part No.	Zinc Over Copper Part No.
	A	B	C	D				
1/16	0.17	0.25	0.08	0.38	0.0009	AS116	CS116	ZCS116
3/32	0.28	0.40	0.13	0.50	0.0032	AS332	CS332	ZCS332
1/8	0.34	0.50	0.16	0.63	0.0064	AS18	CS18	ZCS18
5/32	0.38	0.56	0.19	0.69	0.0081	AS532	CS532	ZCS532
3/16	0.44	0.67	0.22	1.00	0.0156	AS316	CS316	ZCS316
1/4	0.54	0.82	0.29	1.13	0.0252	AS14	CS14	ZCS14
5/16	0.69	1.03	0.38	1.25	0.0451	AS516	CS516	ZCS516
3/8	0.75	1.16	0.44	1.44	0.0607	AS38	CS38	ZCS38

Warning: Dimensions may vary

HARDWARE

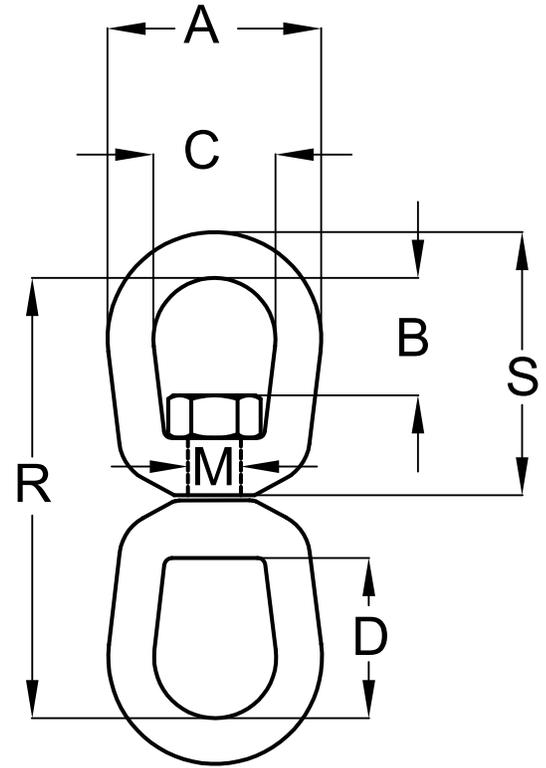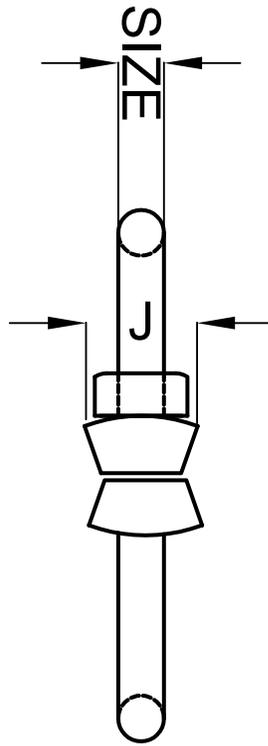


HARDWARE

**Eye to Eye Chain Swivels**  
Hot Dipped Galvanized, Drop Forged  
To Federal Specification RR-C-271D, Type VII, Class 2

Size	Working Load Limit	Dimensions (in)								Weight Per Piece in	Part No.
		A	B	C	D	J	M	R	S		
in	lbs									lbs	
1/4	850	1.25	0.69	0.75	1.06	0.69	0.31	2.94	1.69	0.21	14EES
5/16	1,250	1.63	0.81	1.00	1.25	0.81	0.38	3.56	2.06	0.39	516EES
3/8	2,250	2.00	0.94	1.25	1.50	1.00	0.50	4.31	2.50	0.71	38EES
1/2	3,600	2.50	1.31	1.50	2.00	1.31	0.63	5.44	3.19	1.32	12EES
5/8	5,200	3.00	1.56	1.75	2.38	1.50	0.75	6.56	3.88	2.49	58EES
3/4	7,200	3.50	1.75	2.00	2.63	1.88	0.88	7.19	4.31	4.02	34EES
7/8	10,000	4.00	2.06	2.25	3.06	2.13	1.00	8.38	5.00	6.25	78EES
1	12,500	4.50	2.31	2.50	3.50	2.38	1.13	9.63	5.75	8.95	1EES
1-1/4	18,000	5.63	2.69	3.13	3.69	3.00	1.50	11.44	6.75	16.37	114EES
1 - 1/2	45,200	7.09	3.88	4.09	3.88	3.75	2.25	16.69	9.91	45.79	112EES

Warning: Dimensions may vary

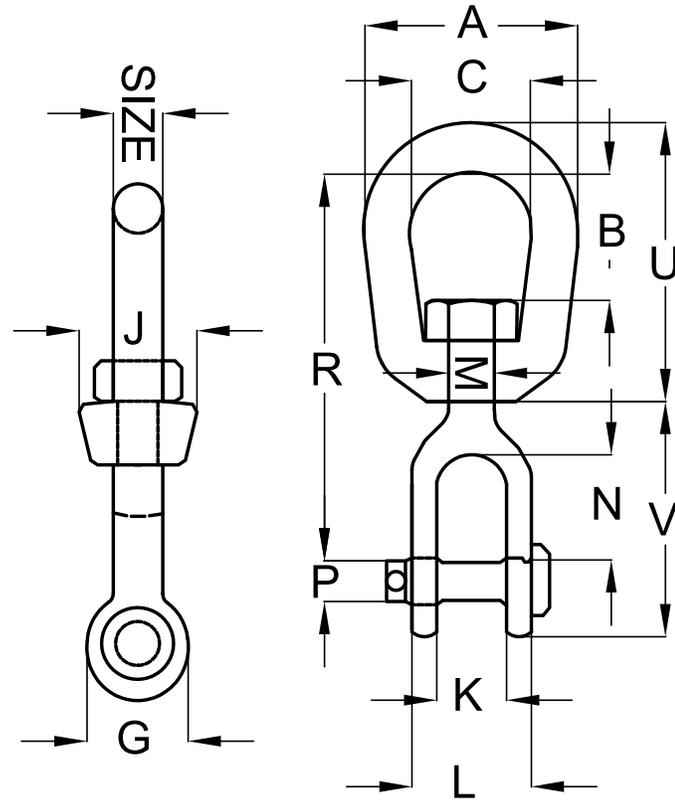

HARDWARE

## Jaw & Eye Chain Swivels

Hot Dipped Galvanized, Drop Forged  
To Federal Specification RR-C-271D, Type VII, Class 3

Size	Working Load Limit	Dimensions (in)													Weight Per Piece In	Part No.
		A	B	C	G	J	K	L	M	N	P	R	U	V		
in	lbs														lbs	
1/4	850	1.25	0.69	0.75	0.69	0.69	0.47	1.03	0.31	0.88	0.25	2.63	1.69	1.69	0.21	14JES
5/16	1,250	1.63	0.81	1.00	0.81	0.81	0.50	1.13	0.38	0.88	0.31	2.94	2.06	1.81	0.34	516JES
3/8	2,250	2.00	0.94	1.25	1.00	1.00	0.63	1.41	0.50	1.06	0.38	3.63	2.50	2.25	0.66	38JES
1/2	3,600	2.50	1.31	1.50	1.31	1.31	0.75	1.75	0.63	1.31	0.50	4.50	3.19	2.88	1.34	12JES
5/8	5,200	3.00	1.56	1.75	1.63	1.50	0.94	2.06	0.75	1.50	0.63	5.31	3.88	3.44	2.48	58JES
3/4	7,200	3.50	1.75	2.00	1.88	1.88	1.13	2.53	0.88	1.75	0.75	6.06	4.31	4.00	3.88	34JES
7/8	10,000	4.00	2.06	2.25	2.13	2.13	1.19	2.75	1.00	2.06	0.88	7.00	5.00	4.53	5.87	78JES
1	12,500	4.50	2.31	2.50	2.63	2.38	1.75	3.72	1.13	2.81	1.13	8.56	5.75	5.94	9.84	1JES
1 - 1/4	18,000	5.69	2.69	3.13	3.13	3.00	2.06	4.31	1.63	2.81	1.38	9.75	7.06	6.38	15.75	114JES
1 - 1/2	45,200	7.00	3.88	4.00	5.63	4.00	2.88	6.00	2.25	4.44	2.25	14.25	10.00	10.84	54.75	112JES

Warning: Dimensions may vary



**Dead End Brace Grips**  
 Hot Dipped Galvanized  
 (Used for 1x7 LRL E.H.S. Guy Wire to ASTM A 475 Class)

Size	Overall Length	Working Load Limit in LBS	Weight per Piece in LBS	Part Number
1/4	22"	6,650	0.54	14DEGRIP
5/16	24"	11,200	0.86	516DEGRIP
3/8	29"	15,400	1.40	38DEGRIP
1/2	40"	26,900	3.15	12DEGRIP

Warning: Dimensions may vary

HARDWARE



## Alloy Steel Blocks

**Steel Wire Rope Snatch Blocks, Bronze Bushed, with Hook**  
Meets or exceeds all the requirements of ASME B30.26

Sheave Dia	Working Load Limit	Weight Per Piece	Rope Dia	Top Fitting	Part No.
in	lbs	lbs	in		
6	12	26	3/4" - 7/8"	Hook	WR6SBAH
8	12	33	3/4" - 7/8"	Hook	WR8SBAH
10	12	41	3/4" - 7/8"	Hook	WR10SBAH

**Steel Wire Rope Snatch Blocks, Bronze Bushed, with Shackle**  
Meets or exceeds all the requirements of ASME B30.26

Sheave Dia	Working Load Limit	Weight Per Piece	Rope Dia	Top Fitting	Part No.
in	Ton	lbs	in		
6	12	27	3/4" - 7/8"	Shackle	WR6SBA
8	12	34	3/4" - 7/8"	Shackle	WR8SBA
10	12	42	3/4" - 7/8"	Shackle	WR10SBA

Warning: Dimensions may vary

HARDWARE



**Wire Rope Blocks**



Sheave Dia	Working Load Limit	Weight Per Piece	Rope Dia	Top Fitting	Part No.
in	lbs	lbs	in		
3	2	4	5/16" - 3/8"	Hook	WR3SBH
4 1/2	4	12	3/8" - 1/2"	Hook	WR412SBH
6	8	28	5/8" - 3/4"	Hook	WR6SBH
8	8	34	5/8" - 3/4"	Hook	WR8SBH
10	8	42	5/8" - 3/4"	Hook	WR10SBH
10	20	89	1-1/8"	Hook	WR10SBHDH
12	20	103	1"	Hook	WR12SBHDH

Snatch Blocks, Bronze Bushed, with Hook  
ASME B30.26

Sheave Dia	Working Load Limit	Weight Per Piece	Rope Dia	Top Fitting	Part No.
in	lbs	lbs	in		
3	2	5	5/16" - 3/8"	Shackle	WR3SB
4 1/2	4	12	3/8" - 1/2"	Shackle	WR412SB
6	8	27	5/8" - 3/4"	Shackle	WR6SB
8	8	33	5/8" - 3/4"	Shackle	WR8SB
10	8	41	5/8" - 3/4"	Shackle	WR10SB
10	20	101	1-1/8"	Shackle	WR10SBHD
12	20	115	1"	Shackle	WR12SBHD

Snatch Blocks, Bronze Bushed, with Shackle  
ASME B30.26

**Warning: Dimensions may vary**

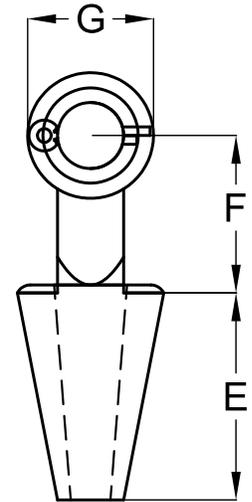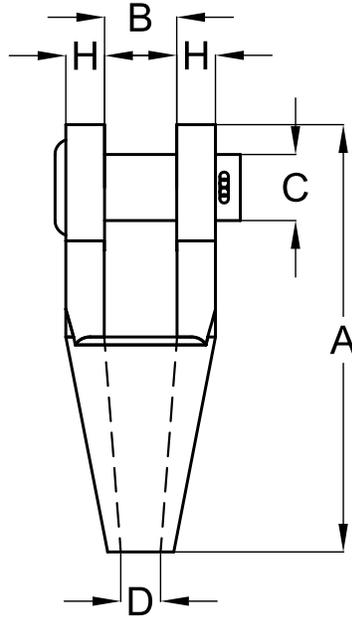



HARDWARE

## Open Spelter Sockets

Meets Federal Specification RR-S-550E, Type A  
Cast Alloy Steel in a Hot Dipped Galvanized Finish

Size	Dimensions (in)								Weight ea in lbs	Part No.
	A	B	C	D	E	F	G	H		
5/16-3/8	4.88	0.81	.81	.50	2.25	1.75	1.50	0.44	1.30	516OSS
7/16-1/2	5.56	1	1	.56	2.50	2.00	1.88	0.50	2.30	716OSS
9/16-5/8	6.75	1.25	1.19	.69	3.	2.50	2.25	.56	3.80	916OSS
3/4	7.94	1.50	1.38	.81	3.50	3.00	2.63	.63	6.00	34OSS
7/8	9.25	1.75	1.63	.94	4.00	3.50	3.13	.75	10.00	78OSS
1	10.56	2.00	2.00	1.13	4.50	4.00	3.75	0.88	15.50	10OSS
1-1/8	11.81	2.25	2.25	1.25	5.00	4.50	4.13	1.00	22.00	118OSS
1-1/4-1-3/8	13.19	2.50	2.50	1.50	5.50	5.00	4.75	1.13	32.00	114OSS
1-1/2	15.13	3.00	2.75	1.63	6.00	6.00	5.38	1.19	46.00	112OSS
1-5/8	16.25	3.00	3	1.75	6.50	6.50	5.75	1.31	55.00	158OSS
1-3/4-1-7/8	18.25	3.50	3.50	2.00	7.50	7.00	6.50	1.56	85.00	134OSS
2-2-1/8	21.50	4.00	3.75	2.25	8.50	9.00	7.00	1.81	125.00	20OSS
2-1/4-2-3/8	23.50	4.50	4.50	2.50	9.00	10.00	7.75	2.13	165.00	214OSS
2-1/2-2-5/8	25.50	5.	4.75	2.88	9.75	10.75	8.50	2.38	252.00	212OSS
2-3/4-2-7/8	27.25	5.25	5	3.13	11.00	11.00	9.00	2.88	315.00	234OSS
3-3-1/8	29.00	5.75	5.25	3.38	12.00	11.25	9.50	3.00	380.00	30OSS

Warning: Dimensions may vary

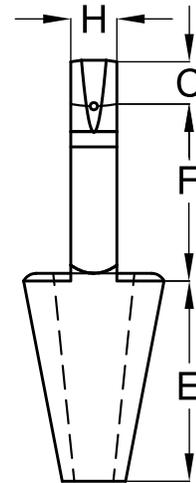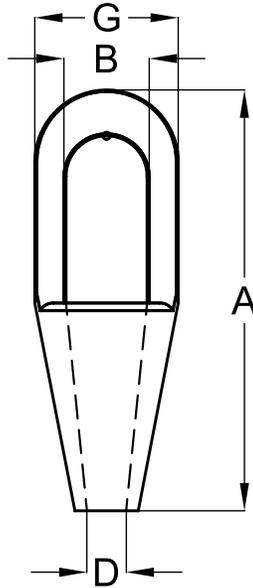

## Closed Spelter Sockets

Meets Federal Specification RR-S-550E, Type B  
Cast Alloy Steel in a Hot Dipped Galvanized Finish

Size in	Dimensions (in)								Weight ea in lbs	Part No.
	A	B	C	D	E	F	G	H		
5/16-3/8	4.88	0.94	0.63	0.50	2.25	2.00	1.69	0.69	1.10	516CSS
7/16-1/2	5.44	1.13	0.69	0.56	2.50	2.25	2.00	0.88	1.50	716CSS
9/16-5/8	6.31	1.38	0.81	0.69	3.00	2.50	2.63	1.00	3.00	916CSS
3/4	7.56	1.63	1.06	0.81	3.50	3.00	3.00	1.25	4.50	34CSS
7/8	8.75	1.88	1.25	0.94	4.00	3.50	3.63	1.50	7.00	78CSS
1	9.88	2.25	1.38	1.13	4.50	4.00	4.13	1.75	11.00	1CSS
1-1/8	11.00	2.50	1.50	1.25	5.00	4.50	4.50	2.00	16.00	118CSS
1-1/4-1-3/8	12.13	2.75	1.63	1.50	5.50	5.00	5.00	2.25	22.00	114CSS
1-1/2	13.94	3.13	1.94	1.63	6.00	6.00	5.38	2.50	28.00	112CSS
1-5/8	15.38	3.25	2.13	1.75	6.50	6.75	5.75	2.75	36.00	158CSS
1-3/4-1-7/8	17.25	3.53	2.79	2.00	7.50	7.56	6.75	3.00	58.00	134CSS
2-2-1/8	19.50	3.78	2.44	2.25	8.50	8.56	7.63	3.25	80.00	2CSS
2-1/4-2-3/8	21.38	4.28	2.88	2.50	9.00	9.50	8.50	3.63	105.00	214CSS
2-1/2-2-5/8	23.50	5.50	3.13	2.88	9.75	10.63	9.50	4.00	140.00	212CSS
2-3/4-2-7/8	25.38	6.50	3.13	3.13	11.00	11.25	10.75	4.88	220.00	234CSS
3-3-1/8	27.00	6.75	3.25	3.38	12.00	11.75	11.50	5.25	276.00	3CSS

Warning: Dimensions may vary



## Hand Swaging Tools

HARDWARE

Swages Cable Sizes	Size	Weight Per Piece in LBS	Part No.
5/32, 1/4 & 5/16	30"	2.00	HST532-516
3/8	36"	3.00	HST38T
1/16, 3/32, 1/8, 5/32 & 3/16	24"	15.00	HST116-316


Warning: Dimensions may vary

# STAINLESS STEEL HARDWARE



**ELITE** 50<sup>TH</sup>  
**SALES ANNIVERSARY**

[www.elitesalesinc.com](http://www.elitesalesinc.com)


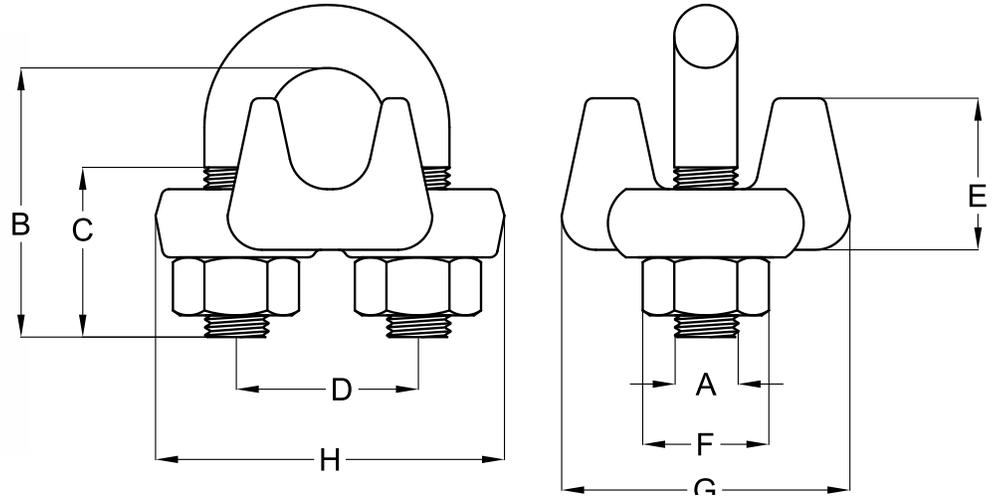


## Stainless Steel Wire Rope Clips Type 304 & 316 Stainless Steel To FF-C-450 Type 1, Class 1 (Forged Style)

HARDWARE

Size	Weight per piece	Dimensions (in)								Part No. Type 304	Part No. Type 316
		A	B	C	D	E	F	G	H		
1/8	.06	.22	.72	.44	.47	.41	.38	.81	.94	SC18	SSC18
3/16	.10	.25	.97	.56	.59	.50	.44	.94	1.16	SC316	SSC316
1/4	.20	.31	1.03	.50	.75	.66	.56	1.19	1.44	SC14	SSC14
3/8	.47	.44	1.50	.75	1.00	.91	.75	1.63	1.94	SC38	SSC38
1/2	.77	.50	1.88	1.00	1.19	1.13	.88	1.91	2.28	SC12	SSC12
5/8	1.06	.56	2.38	1.25	1.31	1.34	.94	2.06	2.50	SC58	SSC58
3/4	1.42	0.62	2.75	1.44	1.50	1.39	1.06	2.25	2.84	SC34	SSC34
1	2.52	0.75	3.50	1.81	1.88	1.77	1.25	2.63	3.47	SC1	SSC1


Warning: Dimensions may vary

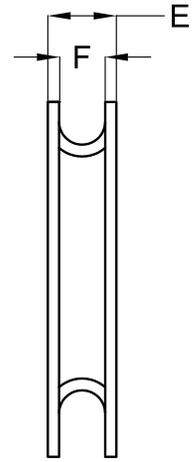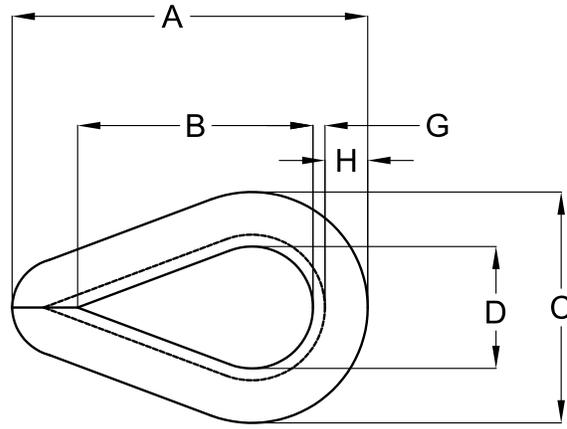

## Stainless Steel Regular Duty Wire Rope Thimbles Type 304 Stainless Steel To FF-T-276B, Type II

Size	Weight per piece	Dimensions (in)				Part No.
		A	B	C	D	
1/8	0.01	0.12	0.37	0.71	0.03	SRDT18
3/16	0.02	0.19	0.44	0.80	0.04	SRDT316
1/4	0.02	0.25	0.69	0.95	0.05	SRDT14
5/16	0.04	0.34	0.78	1.40	0.06	SRDT516
3/8	0.06	0.42	0.94	1.70	0.06	SRDT38
1/2	0.14	0.50	1.14	2.80	0.09	SRDT12
5/8	0.17	0.68	1.45	2.37	0.07	SRDT58



Warning: Dimensions may vary

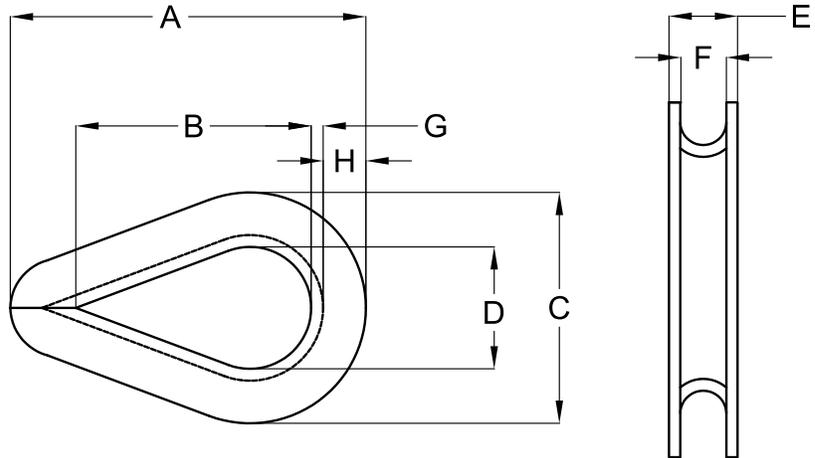

## Stainless Steel Heavy Duty Wire Rope Thimbles Type 304 and 316 Stainless Steel To FF-T-276B, Type III

Size	Weight per piece	Dimensions (in)								Part No. Type 304	Part No. Type 316
		A	B	C	D	E	F	G	H		
1/4	0.65	2.19	1.62	1.50	.88	.44	0.28	0.06	0.25	SHDT14	SSHDT14
5/16	0.11	2.50	1.88	1.81	1.06	0.50	0.34	0.08	0.30	SHDT516	SSHDT516
3/8	0.21	2.88	2.12	2.12	1.12	0.63	0.41	0.11	0.39	SHDT38	SSHDT38
1/2-9/16	0.51	3.62	2.75	2.75	1.50	0.89	0.59	0.15	0.48	SHDT12	SSHDT12
5/8	0.75	4.25	3.25	3.12	1.75	1.00	0.66	0.16	0.53	SHDT58	SSHDT58
3/4	1.58	5.00	3.75	3.81	2.00	1.22	0.78	0.22	0.69	SHDT34	SSHDT34
7/8	1.78	5.50	4.25	4.25	2.25	1.38	0.94	0.22	0.78	SHDT78	SSHDT78
1	3.14	6.12	4.50	4.75	2.50	1.56	1.06	0.25	0.88	SHDT1	SSHDT1


Warning: Dimensions may vary

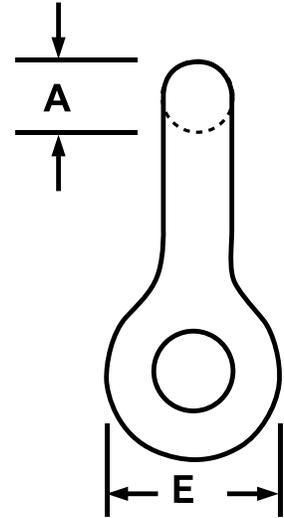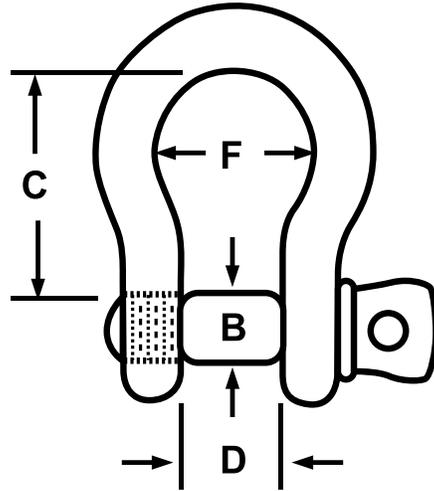

**Screw Pin Anchor Shackles**  
Stainless Steel Type 304 & 316

Size (A)	B	C	D	Working Load Limit (Tons)	Weight Per Piece in LBS	Part No. Type 304	Part No. Type 316
1/4"	0.31	.46	.87	.50	0.09	SLR14SPAS	SSLR14SPAS
5/16"	.38	.52	1.02	.75	0.16	SLR516SPAS	SSLR516SPAS
3/8"	.44	.65	1.24	1	.28	SLR38SPAS	SSLR38SPAS
1/2"	.63	.79	1.58	2	0.70	SLR12SPAS	SSLR12SPAS
5/8"	.75	1.05	1.94	3	1.70	SLR58SPAS	SSLR58SPAS
3/4"	.88	1.20	2.40	4	2.13	SLR34SPAS	SSLR34SPAS
7/8"	1.00	1.45	2.88	5	3.22	SLR78SPAS	SSLR78SPAS
1"	1.13	1.67	3.20	6	4.77	SLR1SPAS	SSLR1SPAS

Warning: Dimensions may vary


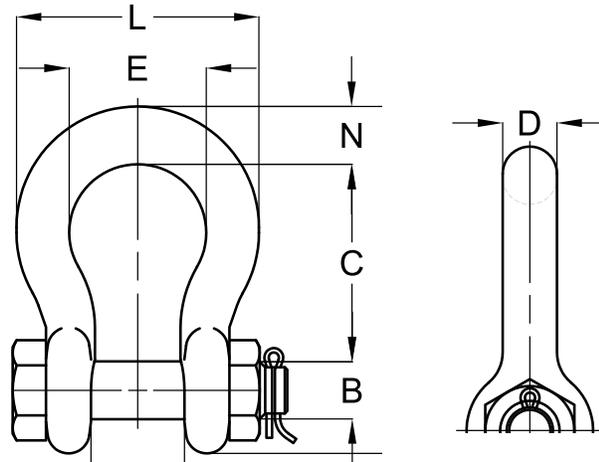


**Bolt Type Anchor Shackles (Safety)**  
**Stainless Steel Type 316**

HARDWARE

A Size	B Pin Dia	C Inside Width	D Inside Length	E	F	Working Load Limit (Tons)	Weight Per Piece in LBS	Part No.
1/4	5/16	1.06	0.47	.66	0.75	.50	0.06	SS14BTAS
5/16	3/8	1.25	0.53	.81	0.84	.75	0.12	SS516BTAS
3/8	7/16	1.44	0.63	.97	1.00	1	0.25	SS38BTAS
1/2	5/8	1.88	0.81	1.31	1.25	2	0.56	SS12BTAS
5/8	3/4	2.44	1.06	1.56	1.69	3	1.00	SS58BTAS
3/4	7/8	2.88	1.19	1.88	1.94	4	1.67	SS34BTAS
7/8	1	3.38	1.44	2.13	2.19	5	2.53	SS78BTAS
1	1-1/8	3.81	1.69	2.38	2.63	6	3.80	SS1BTAS

Warning: Dimensions may vary

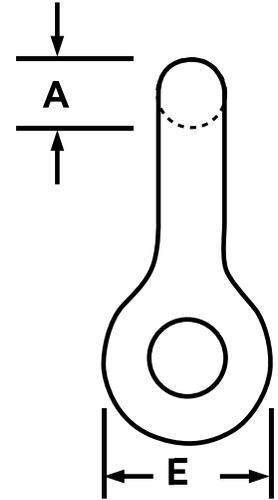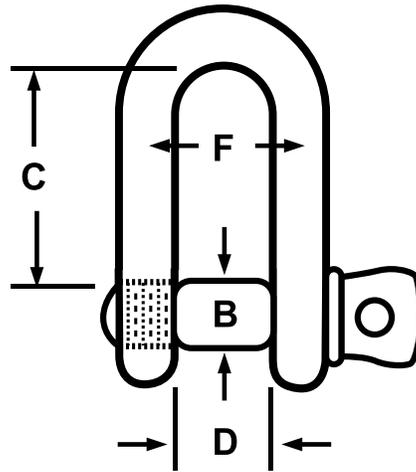


**Screw Pin Chain Shackle**  
**Stainless Steel Type 316**

A Size	Pin Diam. in Inches (B)	C	D	E	F	Working Load Limit (Tons)	Weight Per Piece in LBS	Part No. Type 316
1/4	5/16	1.06	0.47	.66	.75	.50	.10	SS14SPCS
5/16	3/8	1.25	0.53	.81	.84	.75	.18	SS516SPCS
3/8	7/16	1.44	0.63	.97	1.00	1	.29	SS38SPCS
1/2	5/8	1.88	0.81	1.31	1.25	2	.74	SS12SPCS
5/8	3/4	2.44	1.06	1.56	1.69	3	1.4	SS58SPCS
3/4	7/8	2.88	1.19	1.88	1.94	4	2.3	SS34SPCS
7/8	1	3.38	1.44	2.13	2.19	5	3.5	SS78SPCS
1	1-1/8	3.81	1.69	2.38	2.63	6	5.1	SS1SPCS

Warning: Dimensions may vary

HARDWARE

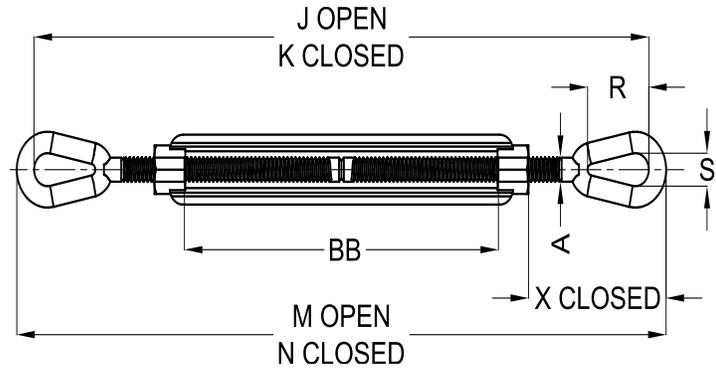


## Eye and Eye Turnbuckles Type 316 Stainless Steel

HARDWARE

Thread Dia & Take Up (in)	Working Load Limit (lbs)	Working Piece (lbs)	Dimensions (in)									Part No.
			A	J Open	K Closed	M Open	N Closed	R	S	X	BB Closed	
1/4 x 4	500	0.30	0.25	11.80	7.80	12.25	8.25	0.78	0.34	1.75	4.00	SSF14X4EE
5/16 x 4-1/2	800	0.47	0.1	13.56	9.06	14.12	9.62	0.94	0.44	2.09	4.50	SSF516X412EE
1/2 x 6	2,200	1.60	0.50	19.08	13.08	19.96	13.96	1.44	0.72	3.23	6.03	SSF12X6EE
5/8 x 6	3,500	2.75	0.63	20.68	14.68	21.68	15.68	1.75	0.88	3.90	6.03	SSF58X6EE
3/4 x 6	5,200	3.89	0.75	22.38	16.38	23.62	17.62	2.09	1.00	4.69	6.13	SSF34X6EE
1x6	10,000	9.33	1.00	25.97	19.97	27.72	21.72	3.00	1.44	6.36	6.18	SSF1X6EE
1-1/4 x 12	15,200	19.00	1.25	40.31	28.31	42.56	30.56	3.56	1.81	7.72	12.06	SSF114X12EE

Warning: Dimensions may vary

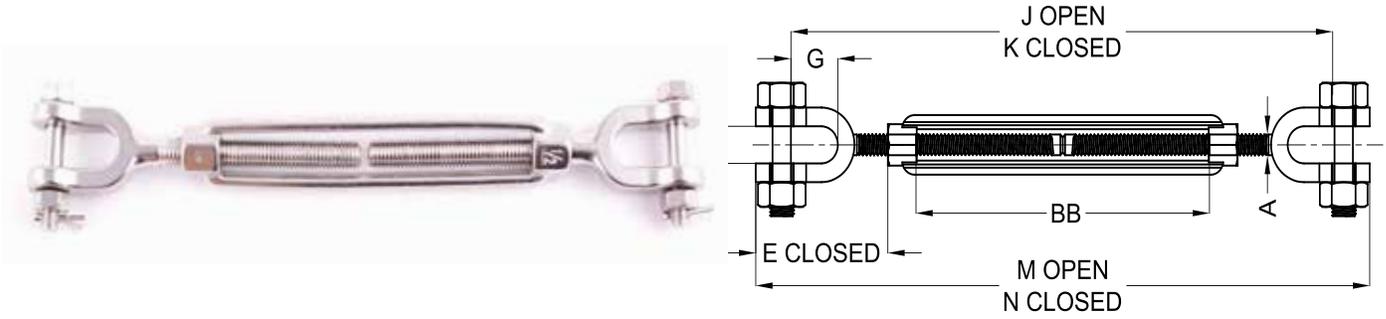


## Jaw and Jaw Turnbuckles Type 316 Stainless Steel

Thread Dia & Take Up (in)	Working Load Limit (LBS)	Weight Per Piece in LBS	Dimensions (in)										Part No.
			A	J Open	K Closed	M Open	N Closed	R	S	X Closed	BB		
1/4 x 4	500	0.36	0.25	0.45	1.58	0.62	10.90	6.90	11.90	7.90	4.00	SSF14X4JJ	
5/16 x 4	800	0.50	0.31	0.50	1.98	0.87	12.36	8.36	13.90	9.40	4.50	SSF516X4JJ	
3/8 x 6	1,200	0.81	0.38	0.54	2.12	0.87	16.14	10.14	17.38	11.38	6.00	SSF38X6JJ	
1/2 x 6	2,200	1.50	0.50	0.68	2.75	1.06	17.50	11.50	19.00	13.00	6.00	SSF12X6JJ	
5/8 x 6	3,500	2.72	0.63	0.82	3.50	1.31	12.80	12.80	20.88	14.88	6.00	SSF58X6JJ	

Warning: Dimensions may vary

HARDWARE

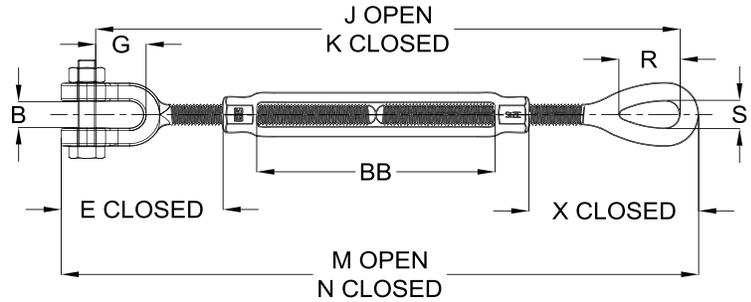


## Jaw and Eye Turnbuckles Stainless Steel Type 316

Thread Dia & Take Up (in)	Working Load Limit (LBS)	Weight Per Piece in LBS	Dimensions (in)													Part No.
			A	B	E Closed	G	J Open	K Closed	M Open	N Closed	R	S	X Closed	BB		
1/4 x 4	500	0.32	0.25	0.45	1.58	0.62	11.35	7.35	12.07	8.07	0.78	0.34	1.75	4.00	SSF14X4JE	
5/16 x 4	800	0.47	0.31	0.50	1.98	0.87	8.71	14.01	9.51	0.94	0.44	2.09	0.44	2.09	SSF516X412JE	
3/8 x 6	1,200	0.76	0.38	0.54	2.12	0.87	16.81	10.81	17.77	11.77	1.12	0.53	2.52	6.00	SSF38X6JE	
1/2 x 6	2,200	1.53	0.50	0.68	2.75	1.06	18.29	12.29	19.48	13.48	1.44	0.72	3.23	6.00	SSF12X6JE	
5/8 x 6	3,500	2.35	0.63	0.82	3.50	1.31	19.74	13.74	21.28	15.28	1.75	0.88	3.90	6.00	SSF58X6JE	
3/4 x 6	5,200	4.00	0.75	1.03	4.18	1.50	27.19	18.19	29.11	20.11	2.09	1.00	4.69	9.00	SSF34X6JE	
1 x 6	10,000	8.92	1.00	1.31	5.53	2.06	24.34	18.34	26.89	20.89	3.00	1.44	6.36	6.00	SSF1X6JE	
1 x 12	10,000	11.20	1.00	1.31	5.53	2.06	36.34	26.34	38.89	26.89	3.00	1.44	6.36	12.00	SSF1X12JE	
1-1/4 x 12	15,000	20.00	1.25	1.86	7.21	2.81	38.82	26.82	42.05	30.05	3.56	1.81	7.72	18.00	SSF114X12JE	

Warning: Dimensions may vary

HARDWARE

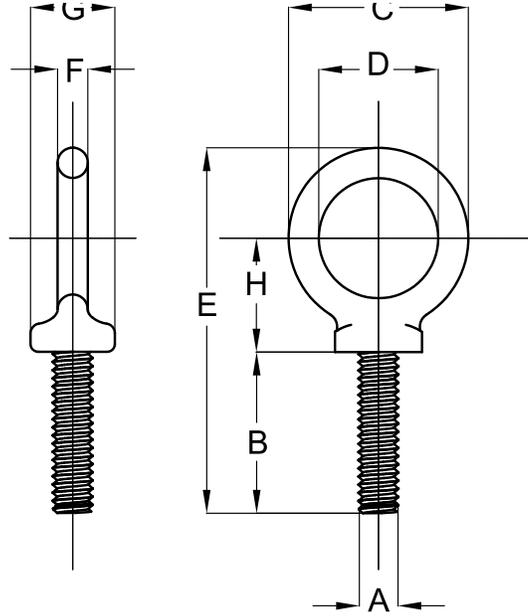


**Shoulder Type Machinery Eye Bolts**  
Stainless Steel, Type 316  
Meets or exceeds all requirements of ASME B30.26

HARDWARE

Diameter & Shank Length (in)	A-T.P.I.	Dimensions (in)							Working Load Limit LBS	Weight Per Piece in LBS	Stainless Steel Part No.
		B	C	D	E	F	G	H			
1/4 x 1	1/4"-20	1.02	1.13	0.75	2.29	0.19	0.53	0.70	575	0.05	SS14X1ME
5/16 X 1-1/8	5/16"-18	1.15	1.38	0.88	2.74	0.25	0.59	0.90	1217	0.09	SS516X118ME
3/8 X 1-1/4	3/8"-16	1.27	1.62	1.00	3.07	0.31	0.69	1.00	1300	0.15	SS38X114ME
1/2 X 1-1/2	1/2"-13	1.53	1.95	1.19	3.70	0.38	0.91	1.20	2288	0.28	SS12X112ME
5/8 X 1-3/4	5/8"-11	1.79	2.38	1.38	4.45	0.50	1.13	1.47	3500	0.55	SS58X134ME
3/4 X 2	3/4"-10	2.05	2.76	1.50	5.07	0.63	1.38	1.64	5250	0.96	SS34X2ME
7/8 X 2-1/4	7/8"-9	2.31	3.25	1.75	5.87	0.75	1.56	1.94	3266	1.54	SS78X214ME
1 X 2-1/2	1"-8	2.57	3.76	2.00	6.66	0.88	1.81	2.21	6500	2.38	SS1X212ME

Warning: Dimensions may vary

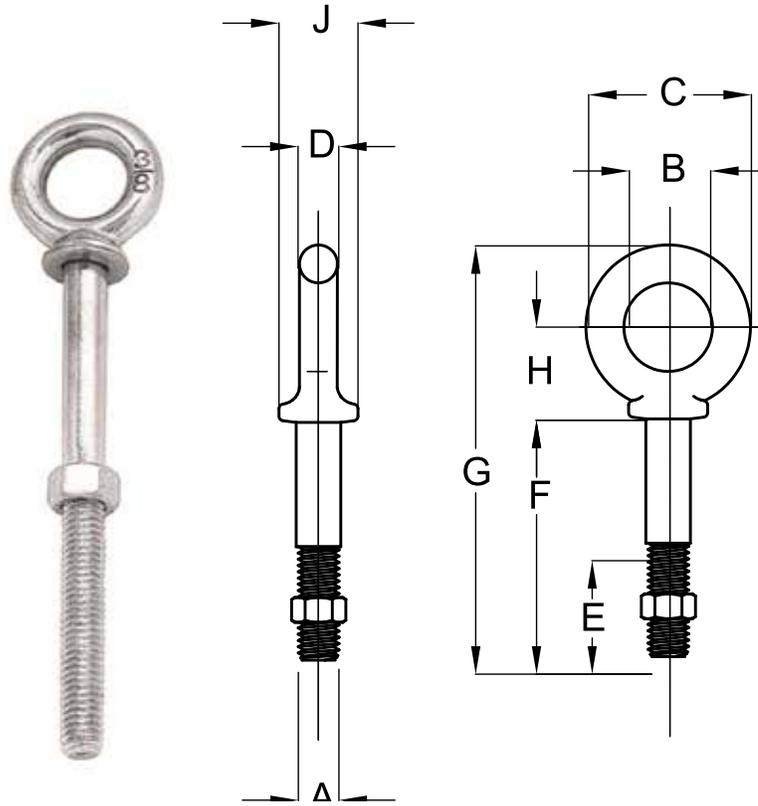


## Shoulder Eye Bolts Stainless Steel Type 316

Meets or exceeds all requirements of ASME B30.26

Diameter & Shank Length (in)	Dimensions (in)									Working Load Limit LBS	Weight Per Piece in LBS	Stainless Steel Part No.
	A	B	C	D	E	F	G	H	J			
1/4 x 2	.25	.50	.88	.19	1.50	2.00	2.94	.50	.47	767	.066	SS14X2SN
1/4 x 2-1/2	.25	.50	.88	.19	2.50	4.00	4.94	.50	.47	767	.091	SS14X212SN
5/16 x 2-1/4	.31	.62	1.12	.25	1.50	2.25	3.50	.69	.56	780	.125	SS516X214SN
5/16 x 4-1/4	.31	.62	1.12	.25	2.50	4.25	5.50	.69	.56	780	.188	SS516X414SN
3/8 x 2-1/2	.38	.75	1.38	.31	1.50	2.50	3.97	.78	.66	1,734	.214	SS38X212SN
3/8 x 4-1/2	.38	.75	1.38	.31	2.50	4.50	5.97	.78	.66	1,200	.253	SS38X412SN
1/2 x 3-1/4	.50	1.00	1.75	.38	1.50	3.25	5.12	1.00	.91	2,150	.426	SS12X314SN
1/2 x 6	.50	1.00	1.75	.38	3.00	6.00	7.88	1.00	.91	2,150	.568	SS12X6SN
5/8 x 4	.62	1.25	2.25	.50	2.00	4.00	6.44	1.31	1.12	3,440	.686	SS58X4SN
5/8 x 6	.62	1.25	2.25	.50	3.00	6.00	8.44	1.31	1.12	3,440	1.024	SS58X6SN
3/4 x 4-1/2	.75	1.50	2.75	.62	2.00	4.50	7.44	1.56	1.38	5,140	1.445	SS34X412SN
3/4 x 6	.75	1.50	2.75	.62	3.00	6.00	8.94	1.56	1.38	5,140	1.675	SS34X6SN


Warning: Dimensions may vary

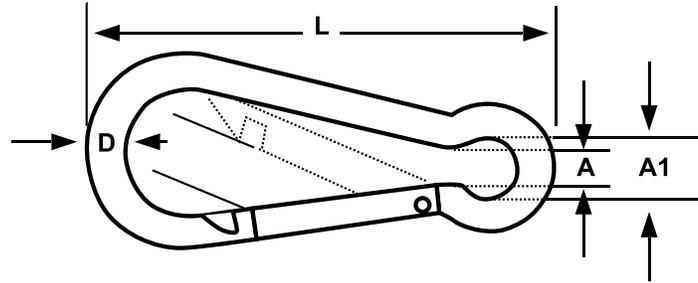

**Spring Snap Hooks**  
Stainless Steel Type 316

Size (A)	B	C	D	Working Load Limit (LBS)	Weight Per Piece in LBS	Part No.
1/4"	0.32	2.00	.25	120	0.04	SS316SH
5/16"	.36	2.38	.27	180	0.06	SS14SH
3/8"	.48	3.13	.38	280	0.15	SS516SH
9/16"	.63	3.88	.54	400	0.27	SS38SH
11/18"	.75	4.63	.65	550	0.42	SS716SH
1	0.90	6.25	.95	900	0.78	SS12SH


HARDWARE

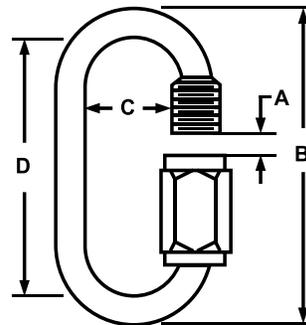

**Quick / Rapid Link**  
Stainless Steel Type 316

Size (A)	B	C	D	E	Working Load Limit (LBS)	Weight Per Piece in LBS	Part No.
1/8"	1.15	.43	.18	.21	200	0.02	SS18RL
3/16"	1.56	.53	.28	.29	800	0.05	SS316RL
1/4"	1.86	.58	.32	.35	1200	0.08	SS14RL
5/16"	2.29	.70	.44	.44	2000	0.16	SS516RL
3/8"	2.78	.78	.52	.52	3500	0.29	SS38RL
1/2"	3.22	1.00	.53	.60	5000	0.52	SS12RL


Warning: Dimensions may vary

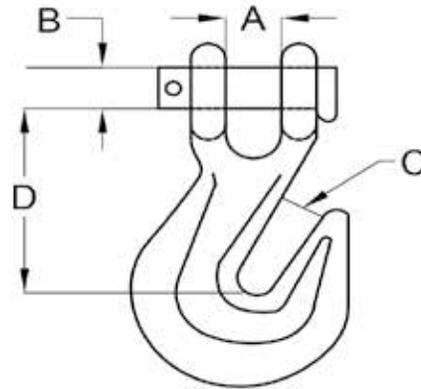

## Clevis Grab Hooks

Size (in)	A	B	C	D	Working Load Limit (LBS)	Weight Per Piece in LBS	Part No.
1/4	0.37	0.41	0.34	1.83	1,500	0.40	SS14CGH
5/16	0.36	0.36	0.40	2.08	2,000	0.60	SS516CGH
3/8	0.47	0.43	0.48	2.55	2,500	1.05	SS38CGH
1/2	0.54	0.50	0.60	2.85	3,600	1.84	SS12CGH

Stainless Steel Type 316

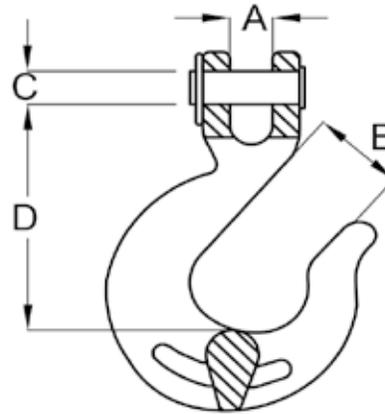


## Clevis Slip Hooks

Size (in)	A	B	C	D	Working Load Limit (LBS)	Weight Per Piece in LBS	Part No.
1/4	0.31	0.41	0.58	2.59	1,000	0.57	SS14CSH
5/16	0.37	0.42	0.83	2.71	1,500	0.82	SS516CSH
3/8	0.47	0.56	0.95	3.23	2,000	1.14	SS38CSH
1/2	0.54	0.64	1.05	3.58	3,000	2.13	SS12CSH

Stainless Steel Type 316


Warning: Dimensions may vary

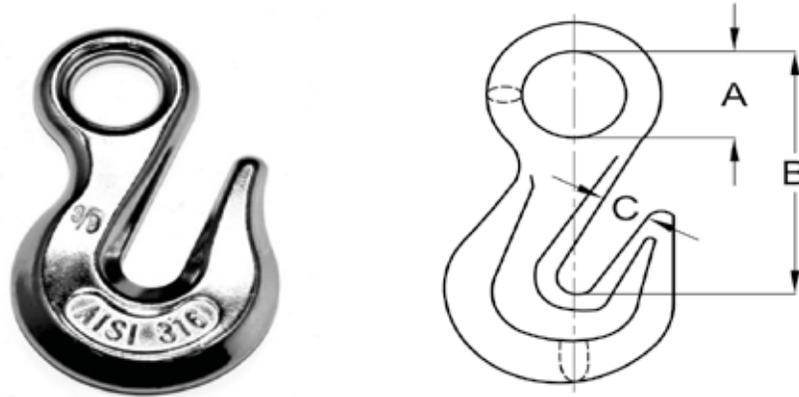

### Eye Grab Hooks

Size (A)	B	C	D	Working Load Limit (LBS)	Weight Per Piece in LBS	Part No.
1/4	0.50	0.35	2.00	1,500	0.35	SS14EGH
5/16	0.56	0.43	2.25	2,000	0.56	SS516EGH
3/8	0.65	0.50	2.50	2,500	0.89	SS38EGH
1/2	0.88	0.66	3.35	3,600	1.51	SS12EGH


Stainless Steel Type 316

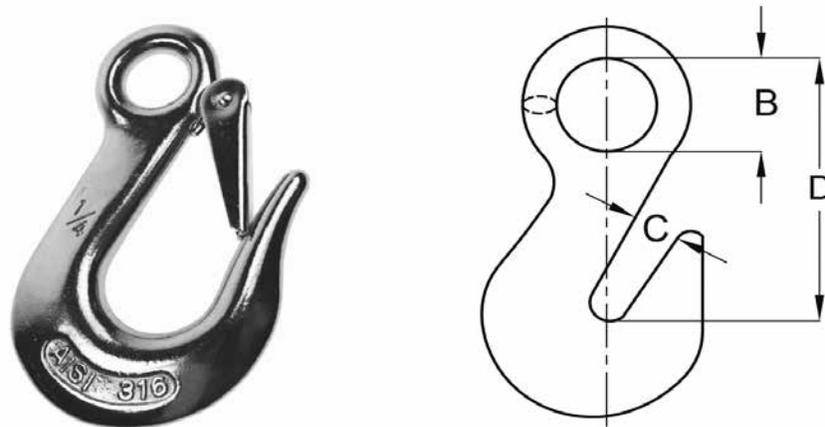

### Eye Slip Hook

Size (A)	B	C	D	Working Load Limit (LBS)	Weight Per Piece in LBS	Part No.
1/4	0.53	0.68	2.54	1,000	0.30	SS14ESH
5/16	0.65	0.75	3.00	1,500	0.54	SS516ESH
3/8	0.71	0.80	3.28	2,000	1.04	SS38ESH
1/2	0.94	1.02	4.17	3,000	1.87	SS12ESH


Warning: Dimensions may vary

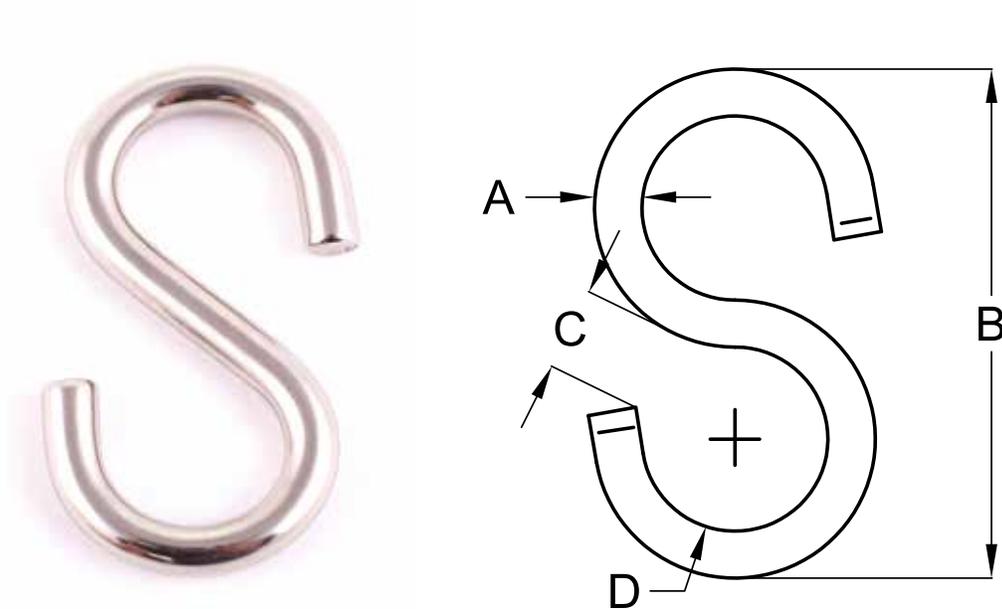

**S Hooks**  
Stainless Steel Type 316

Size (A)	B	C	D	Working Load Limit (LBS)	Weight Per Piece in LBS	Part No. Type 316
1/8	1.38	.20	.42	50	.01	SSH18
5/32	1.59	.20	.51	80	.02	SSH532
3/16	1.90	.29	.63	120	.04	SSH316
1/4	2.25	.32	.70	200	0.06	SSH14
5/16	2.58	.46	.75	350	0.12	SSH516

Warning: Dimensions may vary

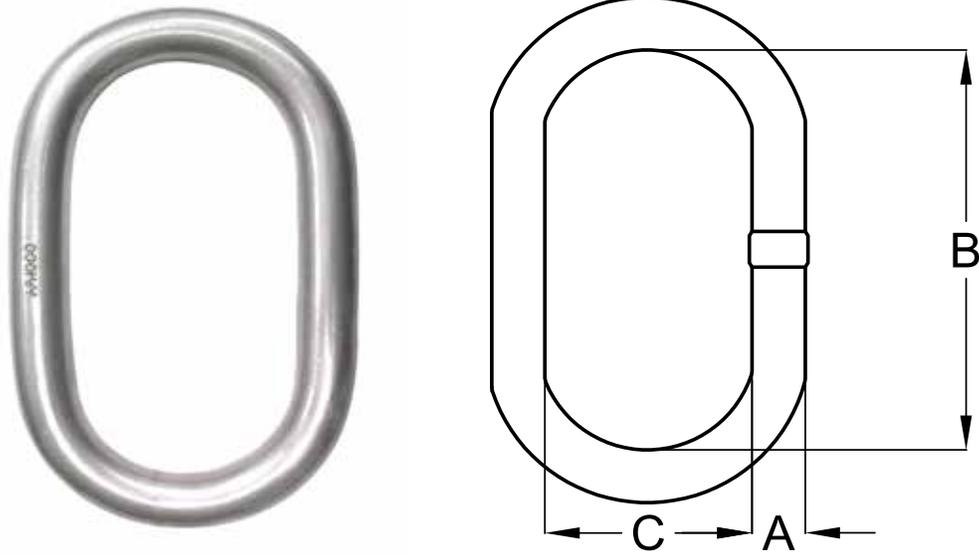


**Oblong Master Links**  
Stainless Steel Type 316

HARDWARE

Size (A)	B	C	Working Load Limit (LBS)	Weight Per Piece in LBS	Part No.
3/8	3.00	1.50	1,500	0.35	SS38OML
1/2	5.00	2.50	2,000	0.84	SS12OML
5/8	6.00	3.00	2,800	1.61	SS58OML
3/4	6.50	3.25	3,750	2.26	SS34OML
1	7.00	3.50	8,000	4.94	SS1OML
1-1/4	8.75	4.38	11,800	9.65	SS114OML

Warning: Dimensions may vary

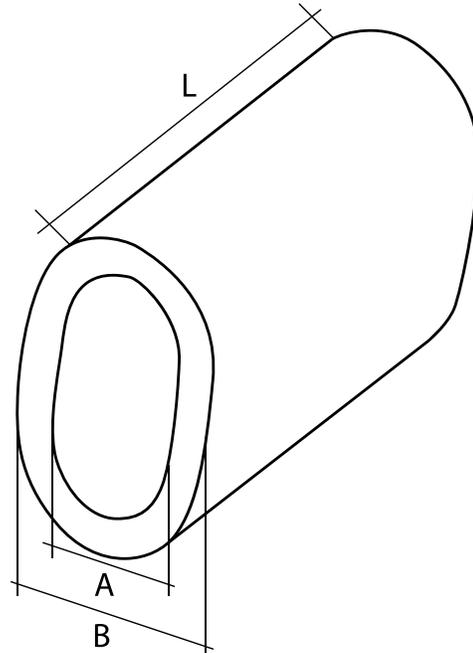


## Stainless Steel Oval Swage Sleeve

### Type 316


Size	Weight in LBS	A	B	L	Part Numbers
3/16	0.03	3/16	0.34	1	SS316OS
1/4	0.05	1/4	0.43	1-1/8	SS14OS
5/16	0.08	5/16	0.56	1-3/8	SS516OS
3/8	0.10	3/8	0.75	1-3/8	SS38OS
1/2	0.33	1/2	0.92	1-3/4	SS12OS

Warning: Dimensions may vary

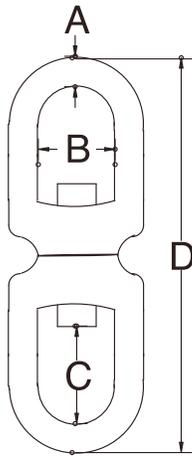

## Eye & Eye Swivel Stainless Steel Type 316

Size (A)	B	C	D	Working Load Limit (LBS)	Weight Per Piece in LBS	Part No.
1/4	0.56	0.56	2.56	600	0.12	SS14EES
5/16	0.75	0.75	3.62	1100	0.29	SS516ESS
3/8	0.87	1.00	4.39	1540	0.55	SS38ESS
1/2	1.25	1.31	5.83	2640	1.25	SS12ESS
5/8	1.50	1.62	7.37	4750	2.10	SS58ESS
3/4	1.62	2.00	8.50	7000	3.40	SS34ESS
7/8	1.87	2.00	9.25	8000	5.02	SS78ESS
1	2.50	2.56	11.00	10000	8.73	SS1ESS

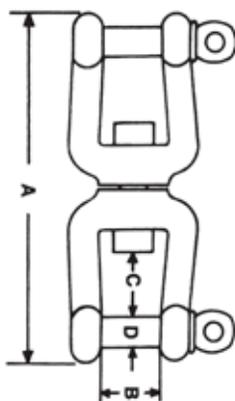

## Jaw and Jaw Swivels Stainless Steel Type 316

Size (A)	B	C	D	Working Load Limit (LBS)	Weight Per Piece in LBS	Part No.
1/4	0.50	0.44	2.63	650	0.15	SS14JJS
5/16	0.63	0.63	3.63	1200	0.38	SS516JJS
3/8	0.75	0.88	4.63	1500	0.75	SS38JJS
1/2	1	1.13	6	2600	1.50	SS12JJS
5/8	1.25	1.38	7.38	4500	2.60	SS58JJS
3/4	0.75	1.63	8.63	7000	4.30	SS34JJS

Warning: Dimensions may vary

**ELITE** **50**<sup>TH</sup>  
**SALES** ANNIVERSARY

Established in 1973



[www.elitesalesinc.com](http://www.elitesalesinc.com)

# TIE DOWN



**ELITE** **50**<sup>TH</sup>  
**SALES** ANNIVERSARY

[www.elitesalesinc.com](http://www.elitesalesinc.com)



**Twin Wire J-Hooks**  
Yellow Chromate finish

Webbing Size	Weight per Piece (LBS)	Working Load Limit (LBS)	Part No.
1"	0.11	3,000	YC1TJH3
2"	0.20	10,000	YC2TJH10
3"	2.00	22,000	YC3TJH22



**Flat Hook w/ protector**  
Yellow Chromate finish

Webbing Size	Weight per Piece (LBS)	Working Load Limit (LBS)	Part No.
2"	0.40	5,000	YC2FH5
2"	0.75	10,000	YC2FH10P
4"	1.26	15,000	YC4FH15P

TIE DOWN



**Flat Snap Hooks**  
 Yellow Chromate finish

Webbing Size	Style	Weight per Piece (LBS)	Working Load Limit (LBS)	Part No.
2	Flat Snap	0.75	11,000	YC2SH11



**Long J-Hooks**  
Yellow Chrome Clevis with Bolt Cotter Pin


Size	Working Load Limit in LBS	Min. Break in LBS	Weight Per Piece in LBS	Part Number
15	4,800	18,800 LBS	3.7	YC15JH



## Cluster Hooks

**9.4MM Master Link (37.5MM x 75MM)  
 2 x 12MM Links (31MMx51MM)**

Size	Working Load Limit in LBS	Min. Break in LBS	Weight Per Piece in LBS	Part Number
5/16	4,800	18,800	2.89	YCG70CLUSTERHOOK

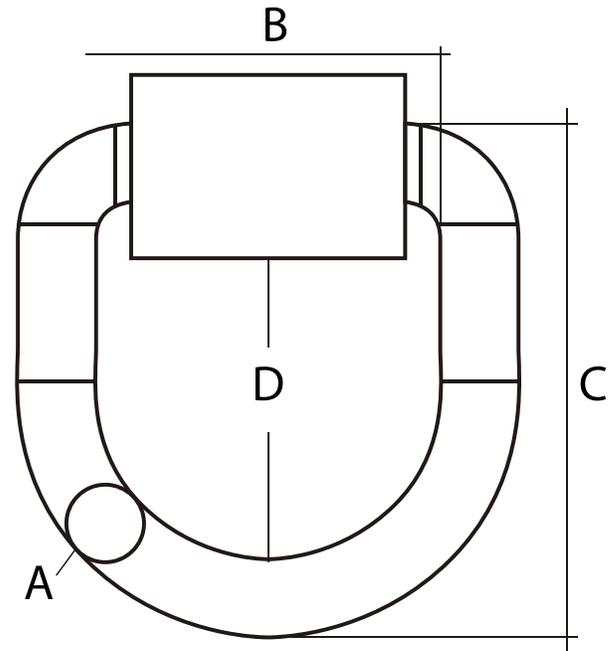

## Weld On D-Rings

Self Colored Finish, Carbon Steel

Size (A)	Weight in LBS	Breaking Strength in Short TONS	A Size	B	C	D	Part Numbers
1/2"	1.09	6T	1/2"	1/2"	1/2"	1/2"	DR12
5/8"	1.78	9T	5/8"	5/8"	5/8"	5/8"	DR58
3/4"	2.26	13.25T	3/4"	3/4"	3/4"	3/4"	DR34



**Tie Down Ratchet Buckle**  
Long & Wide Steel Handle, Heavy Duty Round Grip  
Yellow Chromate Finish

Size	Description	Weight per Piece (LBS)	Working Load Limit (LBS)	Part No.
1"	Long & Wide Steel Round Handle	1.40	3,300	YC1RB3
2"	Long & Wide Steel Round Handle	1.45	10,000	YC2RB10LW
3"	Long & Wide Steel Round Handle	7.20	22,000	YC3RBS22L
4"	Long & Wide Steel Round Handle	8.10	24,000	YC4RB25

\*Some sizes may be available in Short & Standard handles



## Ratchet Strap Assembly

Long & Wide Steel Handle Ratchet with Hooks on both ends

Webbing Diameter	Webbing Length	Break Strength in LBS	Ends	Weight per Assembly in LBS	Part No.
2"	27'	10,000	J- Hooks	6.38	RA2X27JHDRL
2"	27'	10,000	Flat Hook	6.60	RA2X27FHDRL
2"	30'	10,000	J-Hooks	6.70	RA2X30JHDRL
2"	30'	10,000	Flat Hook	7.00	RA2X30FHDRL
4"	30'	20,000	Flat Hook	15.32	RA4X30FH
4"	30'	20,000	J-Hook	15.32	RA4X30JH



**Tie Down Webbing**  
**Yellow Polyester**

Webbing Diameter	Roll Length Diameter	Breaking Strength (LBS)	Weight per Roll in LBS	Part No.
2"	300'	10,000	19	2x300/10000R
4"	300'	20,000	32	4X300/20000
2"	10,000'	10,000	19	2X10000/10000

TIE DOWN



## Grade 43 High Test Binding/Boomer Chains With Clevis Grab Hooks on Each End

Chain Diameter	Chain Length	Finish	Weight per Piece in LBS	Part No.
5/16	20'	Self-Colored	20.00	516SC43BC20
3/8	20'	Self-Colored	31.00	38SC43BC20
1/2	20'	Self-Colored	57.00	12SC43BC20



## Grade 70 Transport Binding/Boomer Chains With Clevis Grab Hooks on Each End

Chain Diameter	Chain Length	Finish	Weight per Piece in LBS	Part No.
5/16	20'	Yellow Chromate	20.00	516SCG70BC20
3/8	20'	Yellow Chromate	31.00	38SCG70BC20
1/2	20'	Yellow Chromate	57.00	12SCG70BC20

TIE DOWN



**Ratchet Load Binders**  
**Forged Load Binders**

Size	Description	Weight per Piece (LBS)	Working Load Limit (LBS)	Part No.
5/16-3/8	Ratchet Load Binder	11.25	6,600	RL516
3/8-1/2	Ratchet Load Binder	13.25	9,200	RL38
1/2-5/8	Ratchet Load Binder	19.20	13,000	RL12



**Lever Load Binders**  
**Forged Load Binders**

Size	Description	Weight per Piece (LBS)	Working Load Limit (LBS)	Part No.
1/4	Lever Load Binder	3.50	2,600	LL14
5/16-3/8	Lever Load Binder	11.00	5,400	LL516
3/8	Lever Load Binder	13.70	9,200	LL38

TIE DOWN



## Alloy Ratchet Load Binders For Use With G80/G100 Chain

Size	Description	Weight per Piece (LBS)	Working Load Limit (LBS)	Part No.
5/16" - 3/8"	Alloy Load Binder	12.10	8,800	RL516A
3/8"-1/2"	Alloy Load Binder	14.55	15,000	RL38A
1/2"-5/8"	Alloy Load Binder	21.30	16,000	RL12A

WIRE ROPE

ELITE **50**<sup>TH</sup>  
SALES ANNIVERSARY

Established in 1973



[www.elitesalesinc.com](http://www.elitesalesinc.com)



**ONE LINK TO | WIRE ROPE | CHAIN | HARDWARE**

## **Miami Executive Office**

**9445 S.W. 40th Street • Second Floor**  
**Miami, Florida 33165**  
**(305) 262-3105 • (800) 458-6659**  
**info@elitesalesinc.com**

## **Tampa Distribution Center**

**603 North 19th Street**  
**Tampa, Florida 33605**

## **Houston Distribution Center**

**6247 Navigation Boulevard**  
**Houston, Texas 77011**

## **Dyer Distribution Center**

**412 Matteson Street**  
**Dyer, Indiana 46311**

## **Reno Distribution Center**

**7795 Security Cir**  
**Reno, NV 89506**

**www.elitesalesinc.com**

Follow Our Activity **f** **in** **▶**