

UB07

Automatic Drop Seal

Fully mortised automatic drop seal featuring a four-bar linkage mechanism for smooth and reliable operation.

Designed for acoustic, smoke and weather protection with high-grade TPE sealing elements and adjustable strike operation.

Suitable for timber and metal doors in both new construction and retrofit applications.




Application:

- Acoustic Control
- Smoke Protection
- Insect Prevention
- Light Blocking
- Weather Protection
- Energy Efficiency

Specification:

Seal Type	Automatic Drop Seal
Prod. Code	UB 07
Installation	Fully Mortised
Seal Material	High Grade TPE
Plunger	ABS Plastic or Brass (Optional)
Housing Mat.	Aluminium Alloy
Finish	Silver
Gap Size	3 - 13mm
Standard lengths in mm	410, 560, 710, 810, 910, 1000, 1100, 1250, 1350, 1500mm
Recommended Door Type	Timber, Metal
Minimum Door Thickness	30mm

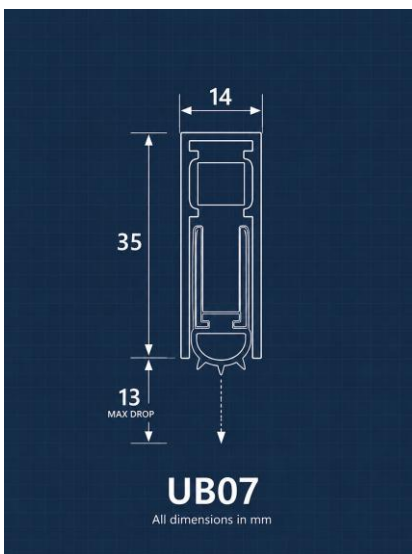

Supplied by:
PT GGESTA Indonesia

Contact: +62 81386230606
Email: timothy@ggesta.com