

UFS 2004

Intumescent Fire seal

UNILOCK UFS 2004 is an intumescent fire seal incorporating an exfoliated graphite core that expands when exposed to high temperatures.

Designed for installation in timber fire doors and frames, it helps prevent the spread of fire, hot gases and smoke while maintaining the integrity of the fire door assembly.

Available in brown and white finishes to suit a wide range of door applications.




Application:

- Smoke Control
- Fire Protection

Specification:

Seal Type	Intumescent Fire Seal
Prod. Code	UFS 2004
Area of Application	Door Perimeter
Seal Material	Rigid PVC with intumescent infill
Finish	Brown, White
Standard lengths in mm	2100mm
Size	4mm x 20mm
Fire Rating	60 minutes
Recommended Door Type	Timber

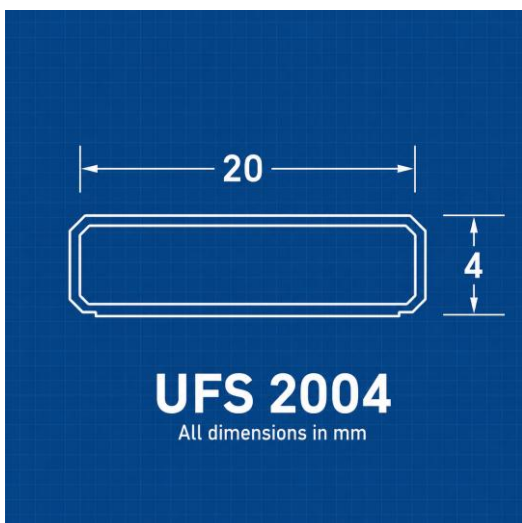

Supplied by:
PT GGESTA Indonesia

Contact: +62 81386230606
Email: timothy@ggesta.com