


UW 150

Perimeter Seal

Slim-line kerf mounted compression seal designed for acoustic, smoke and weather sealing applications.

Manufactured from high-grade co-extruded TPE for long-term flexibility, durability and compression recovery.

Designed for installation into timber kerf grooves, UW150 provides effective sealing with low closing resistance and is suitable for premium door and window joinery systems.

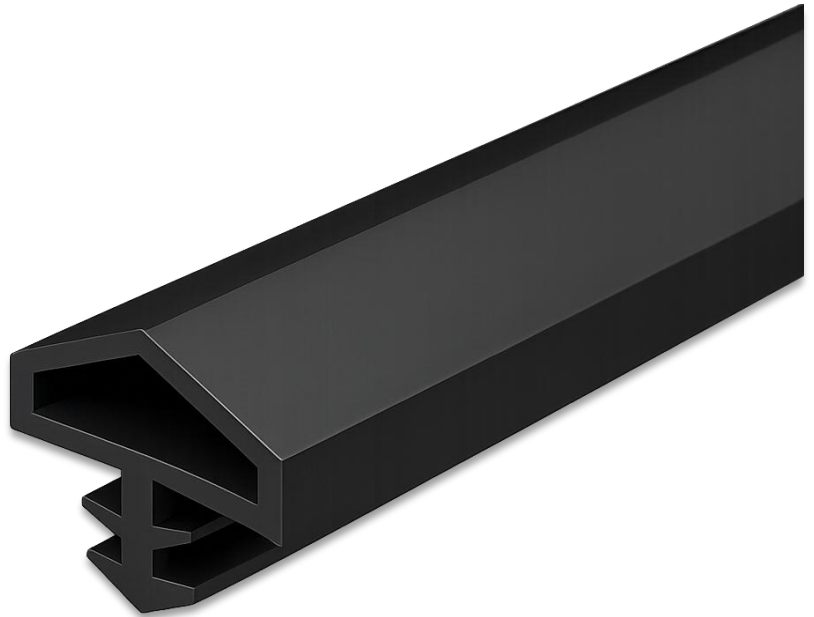


Application:

- Acoustic Control
- Smoke Protection
- Insect Prevention
- Light Blocking
- Weather Protection
- Energy Efficiency

Specification:

Seal Type	Perimeter Seal
Prod. Code	UW 150
Installation	Kerf fitted
Seal Material	High Grade TPE
Finish	Black, Brown and White
Gap Size	3 – 5mm
Standard lengths	Available in 100 meters roll
Recommended Door Type	Timber Doors

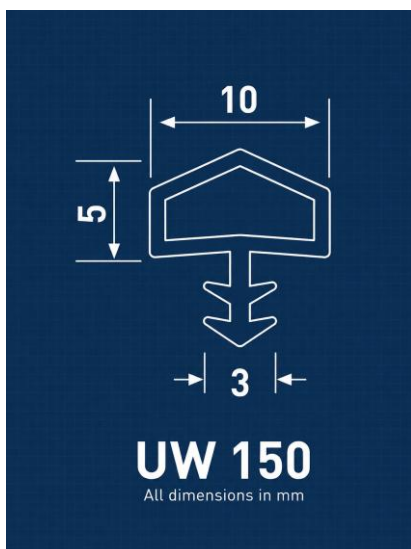

Supplied by:
PT GGESTA Indonesia

Contact: +62 81386230606
Email: timothy@ggesta.com