

UW 610

Perimeter Seal

Slim-line compression seal designed for acoustic, smoke and weather sealing applications. Manufactured from high-grade co-extruded TPE for long-term flexibility and compression recovery.

Designed for installation into a timber kerf groove, UW610 provides effective sealing with low closing resistance. Suitable for premium door and window joinery systems.




Application:

- Acoustic Control
- Smoke Protection
- Insect Prevention
- Light Blocking
- Weather Protection
- Energy Efficiency

Specification:

Seal Type	Perimeter Seal
Prod. Code	UW 610
Installation	Kerf fitted
Seal Material	High Grade TPE
Finish	Black, Brown and White
Gap Size	3 – 5mm
Standard lengths	Available in 100 meters roll
Recommended Door Type	Timber Doors

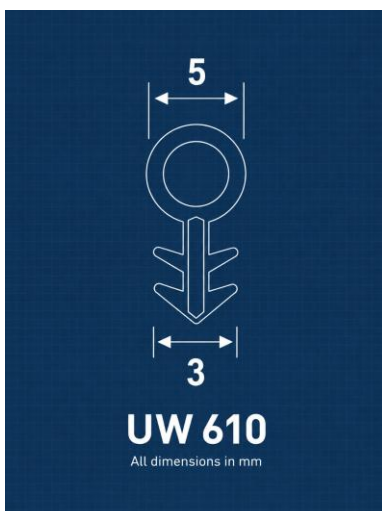

Supplied by:
PT GGESTA Indonesia

Contact: +62 81386230606
Email: timothy@ggesta.com