



TX-52  
TX-53

STAINLESS STEEL (CF8 / CF8M)

## NON SLAM DISC CHECK VALVE (PN40)

STANDARD SEATING : METAL TO METAL  
SUITABLE FOR INSERTION BETWEEN  
#150 / 300 / NON IBR AND IBR FLANGES.



An ISO 9001  
Certified Company




CF8 : **TX-52**  
CF8M : **TX-53**

STAINLESS STEEL  
**NON SLAM DISC CHECK VALVE (PN40).**  
METAL TO METAL SEATING.  
SOFT SEATING AVAILABLE ON REQUEST.  
SUITABLE FOR INSERTION BETWEEN  
#150 / 300 / NON IBR AND IBR FLANGES.

\* CAN BE MOUNTED HORIZONTAL AND  
VERTICAL DIRECTION  
\* TESTING : AS PER API 598.

**HYDRAULIC TEST PRESSURE : 60 Bar**  
**HYD. SEAT TEST PRESSURE : 44 Bar**  
**MAXIMUM ALLOWABLE TEMP : 425°C**

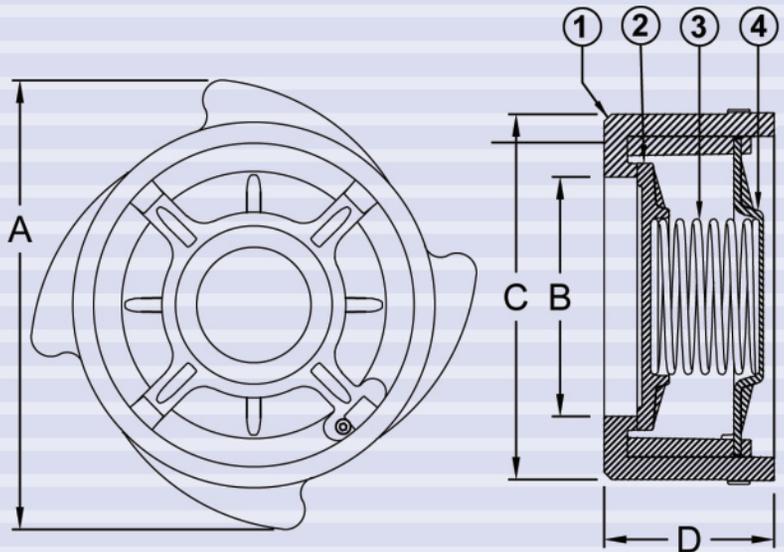

## MATERIALS

S. NO.	PART NAME	MATERIAL	SPECIFICATION
1	BODY	S.S	CF8 / CF8M
2	DISC	S.S	CF8 / CF8M / AISI 304
3	SPRING	S.S	AISI 304 / AISI 316
4	SPRING LOCK	S.S	AISI 304 / AISI 316

## IBR TEST CERTIFICATES IN FORM III C

are supplied with all valves.

## GUARANTEE

All valves are guaranteed against manufacturing defects for a period of 18 months from the date of supply or 12 months from the date of installation whichever ends earlier. However our liability is limited to repair / replacement of complete valve or defective parts as found suitable.

## IMPORTANT :

Due to continuous development programme, design & data in this leaflet are subject to change without any notice.

## DIMENSIONS IN MM

NOMINAL SIZE	A	B	C	D
15mm (1/2")	60	15	39	17
20mm (3/4")	70	20	47	20
25mm (1")	80	25	55	23
32mm (1-1/4")	90	32	66	28
40mm (1-1/2")	102	38	76	34
50mm (2")	117	50	90	40
65mm (2-1/2")	139	65	109	46
80mm (3")	160	75	128	53
100mm (4")	184	95	148	63
150mm (6")	240	135	212	80

Manufactured by :  
**TECHNO INTERNATIONAL**

email: [info@traxvalves.com](mailto:info@traxvalves.com)  
website: [www.traxvalves.com](http://www.traxvalves.com)



An ISO 9001  
Certified Company