



Household and Commercial
Refrigeration Specialists



PT Prima Prospek Indonesia

Ruko City Square Blok B11-12
Jl. Peta Selatan Kalideres
Jakarta Barat 11840

 **Call:** 6221 2252 0288

 **Fax:** 6221 2252 0511

 **Phone:** 6281 1137 9877

 **Website:** www.primaprospek.co.id
www.coolconnection.co.id





Product Catalog

Household and Commercial
Refrigeration Specialists

www.primaprospek.co.id
www.coolconnection.co.id

20
25







About Us

Established in 2000, **PT Prima Prospek Indonesia** has become a leading provider of air conditioning and refrigeration solutions in Indonesia. With over 20 years of experience, we specialize in the supply and distribution of units and spare parts for residential, commercial, and industrial applications.

We partner with respected global brands such as Secop, Wanbao, Kulthorn, Siberia, Huayi and Cubigel to deliver reliable, high-quality solutions tailored to diverse industry requirements. From retail and hospitality to manufacturing and cold chain operations, our commitment to excellence and service has made us a trusted company in refrigeration and cooling solutions nationwide.



Your Trusted Partner in
Cooling Solutions

Vision

To be a leading refrigeration company in Indonesia

Mission

Supplying high quality air conditioning and refrigeration product supporting air conditioning supply chain in Indonesia

To build, strengthen and expand our reach of market and distribution of Air Conditioning and refrigeration in Indonesia

To maintain the availability of our products and providing effective solution that will help all our clients in choosing the best products specifically for our client requirements

Content

07. Compressor
Secop

11. Condensing
Unit

13. Evaporator

17. Compressor
Multi Brand

21. Water
Chiller

22. Monoblock

23. Freon

25. Gallery





Our Products and Services

We provide complete refrigeration solutions through design, installation, and after-sales service tailored to various industry needs. Our products include cold storage, chillers, freezers, blast freezers, and electrical panel controls, all designed for reliable and efficient performance.

Whether serving food processing, pharmaceuticals, hospitality, logistics, or manufacturing, our solutions are engineered for reliable performance, energy efficiency, and long-term durability. Through partnerships with leading global brands, we deliver high-quality cooling and refrigeration solutions that meet the demands of your business and ensure seamless operations.

Comprehensive Refrigeration Solutions
Partnered with the World's Best Brands



Various Products to Meet Your Needs

We offer a complete range of high-quality products from reputable brands, supported by trusted industry partners.



Cold
Storage



Chiller



Freezer



Blast
Freezer



Electrical
Panel Control



More than
20 years
experience



Complete
Refrigeration
Solution



High quality
Products

Brand Partners





SECO

Compressor and Condensing Unit

Secop is a global expert in advanced hermetic compressor technologies and energy-efficient cooling solutions. Founded in 1956, the company combines decades of experience with proven reliability, quality, and sustainability, offering innovative products for food retail, food service, automotive, RV, solar, and medical supply chains. Secop continues to lead the industry by adopting green refrigerants and energy-optimized technologies.

Product Range



Stationary Cooling



Mobile Cooling



Medical Cooling



Condensing Unit

Product Highlights



SC-Series



FR-Series



NL-Series



TL-Series



GTK-Series



SCE Plus



KL-Series



BD Nano-Series



ULT Mobile Cooling



GS-Series



ULT Stationary Cooling



Solar Direct Drive

Powered by Experience
Inspired by The Future

IT ALL STARTS
WITH THE RIGHT MINDSET



Long Product
Life CyclesEnergy Efficient
"Green Solutions"Variable-Speed
CompressorsPremium Controllers
for CompressorsSuperior Product
Quality and ReliabilityHydrocarbon
Ready

Secop Propane Solutions

For over 25 years, Secop has developed eco-friendly R290 and R600a compressors, offering efficient, compact solutions for LBP and MBP applications. Switching from R404A and R134a to R290 reduces costs, with Secop providing a full range of compressors plus expert support and safety solutions.

Replace R134a with Environmental
Friendly Natural Refrigerant R290
Save additional Cost by Utilizing
Smaller Compressor Platforms

High
EfficiencyR290
Green Refrigerant

Conversion Examples from R134a to R290 (220-240 V / 50 Hz)

MBP applications, e.g. beverage coolers, display cabinets, commercial chillers (at ASHRAE MBP conditions)

Evaporating temperature: -6.7°C | Condensing temperature: 54.4°C | Suction gas temperature: 35°C | Ambient temperature: 35°C | Liquid temperature: MBP: 46.1°C

Compressor	NL6.1MF	NF7FX	NF9FX	NF10FX	SC12G	SC15G	SC18G	SC18MFX	SC21MFX	SC12/12G	GS26MFX	SC18/18G
from... R134a	320 W 1.61 COP	432 W 1.66 COP	476 W 1.59 COP	556 W 1.42 COP	614 W 1.60 COP	745 W 1.57 COP	893 W 1.58 COP	916 W 1.63 COP	1114 W 1.76 COP	1228 W 1.60 COP	1446 W 1.82 COP	1774 W 1.63 COP
↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
Compressor	KLF4.0CND	KLF4.8CND	KLF5.6CND	KLF6.6CND	KLF7.7CND	NLE8.8CN	NLE10CN	NLE11MN	NLE12.6MN	SCE15MNX	SCE18MNX	SCE21MNX
to... R290	336 W 2.08 COP	414 W 2.08 COP	495 W 2.10 COP	597 W 2.05 COP	704 W 1.97 COP	752 W 1.98 COP	872 W 1.89 COP	981 W 2.01 COP	1060 W 1.97 COP	1267 W 2.04 COP	1501 W 1.98 COP	1762 W 2.12 COP

Conversion Examples from R134a to R290 (220-240 V / 50 Hz)

LBP applications, e.g. commercial freezers, ice cream cabinets (at ASHRAE LBP conditions)

Evaporating temperature: -23.3 °C | Condensing temperature: 54.4°C | Suction gas temperature: 32.2°C | Ambient temperature: 32.2°C | Liquid temperature: MBP: 32.2°C

Compressor	NL7F	NL9F	NL11F	SC15F	SC15FT	SC18FTX	SC21G	SC21FTX	SC18/18G	SC21/21G
from... R134a	187 W 1.22 COP	213 W 1.21 COP	274 W 1.22 COP	324 W 1.11 COP	386 W 1.18 COP	448 W 1.17 COP	462 W 1.23 COP	569 W 1.27 COP	783 W 1.12 COP	921 W 1.13 COP
↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
Compressor	KLF4.0CND	KLF4.8CND	KLF5.6CND	KLF6.6CND	KLF7.7CND	NLE8.8CN	NLE10CN	NLE11CNL	SCE18CNLX	SCE21CNLX
to... R290	183 W 1.48 COP	230 W 1.50 COP	273 W 1.55 COP	337 W 1.51 COP	385 W 1.52 COP	431 W 1.57 COP	486 W 1.47 COP	540 W 1.52 COP	793 W 1.51 COP	953 W 1.61 COP

**SECCP**

Compressor Product List

SC Series R134, R290, R404

**SC 10 G**

SC-Series Compressor | R134

Power Supply 220-240V / 50Hz

Applications LBP, MBP, HBP

Motors CSIR, RSIR

Cooling Capacity LBP (394 | 1347)
[W | Btu/h] MBP (894 | 3053)Displacement 10.29 cm³

219 mm 12.1 Kg

**SC 15 CNX.2**

SC-Series Compressor | R290

Power Supply 220-240V/50Hz

Applications LBP

Motors CSIR

Cooling Capacity LBP (624 | 2130)
[W | Btu/h]Displacement 15.28 cm³

209 mm 13.2 Kg

**SC 18 CL**

SC-Series Compressor | R404

Power Supply 220-240V / 50 Hz

Applications LBP, MBP

Motors CSCR

Cooling Capacity LBP (800 | 2735)
[W | Btu/h] MBP (1510 | 5157)Displacement 17.69 cm³

219 mm 13.8 Kg

GS Series R404, R134

**GS 26 MLX**

GS-Series Compressor | R404

Power Supply 220-240V / 50 Hz

Applications MBP

Motors CSCR

Cooling Capacity MBP (2395 | 8180)
[W | Btu/h]Displacement 26.3 cm³

279 mm 21.4 Kg

**GS 34 CLX**

GS-Series Compressor | R134

Power Supply 220-240V / 50 Hz

Applications LBP

Motors CSR

Cooling Capacity LBP (1450 | 4952)
[W | Btu/h]Displacement 33.80 cm³

279 mm 22.2 Kg

FR Series R134 R404

**FR 11G**

FR-Series Compressor | R134

Power Supply 220-240V / 50Hz

Applications LBP, HBP

Motors RSIR, CSIR

Cooling Capacity LBP (235 | 802)
[W | Btu/h]Displacement 11.15 cm³

196 mm 10.6 Kg

**FR 8.5 CL**

FR-Series Compressor | R404

Power Supply 220-240V / 50 Hz

Applications LBP

Motors CSIR

Cooling Capacity LBP (369 | 1260)
[W | Btu/h]Displacement 7.95 cm³

196 mm 10.6 Kg





Energy Efficient
"Green Solutions"



Premium Controllers
for Compressors



Superior Product
Quality and Reliability



Hydrocarbon
Ready



Long Product
Life Cycles



Variable-Speed
Compressors

SECCP

NL Series R134 R404



NL 8.4 MF

NL-Series Compressor | R134

Power Supply 220-240V/50Hz

Applications LBP, MBP, HBP

Motors RSIR, CSIR

Cooling Capacity MBP (457 | 1561)
[W | Btu/h] HBP (823 | 2810)

Displacement 8.35 cm³

197 mm 10.5 Kg



NL 7 CLX

NL-Series Compressor | R404

Power Supply 220-240V/50Hz

Applications LBP, MBP

Motors CSIR, RSIR

Cooling Capacity LBP (387 | 1323)
[W | Btu/h]

Displacement 7.27 cm³

203 mm 10.4 Kg

TL Series R134



TL 4G

TL-Series Compressor | R134

Power Supply 220-240V 50/60Hz

Applications LBP, HBP

Motors RSIR/CSIR

Cooling Capacity LBP (80.5 | 275)
[W | Btu/h]

Displacement 3.86 cm³

173 mm 7.5 Kg

GTK Series R134



GTK 80 AT

GTK-Series Compressor | R134

Power Supply 200-240V / 50 Hz

Applications LBP

Motors RSCR, RSIR

Cooling Capacity LBP (222 | 759)
[W | Btu/h]

Displacement 7.70 cm³

177 mm 8.6 Kg



Discover More Secop Products

Scan the barcode to explore Secop's
complete product range.
<https://www.secop.com/>



Discover More Cooling Solutions

Scan the barcode to view Prima Prospek
Indonesia's complete product lines.
www.coolconnection.co.id



Multi Brand Refrigeration and Cooling Products

We provide a wide range of multi-brand cooling and refrigeration products, including compressors, evaporators, condensing units, water chillers, monoblocks, and refrigerants. These solutions are applied in various sectors, from chillers, cold storage, and warehouses to mobile refrigeration units and medical cooling systems, ensuring consistent performance, reliability, and quality.

Typical Applications



Mobile Cold Storage



Undercounter Refrigerators



Show Case




Ice Cream Display



Stainless Steel Freezer



Walk-in Freezer

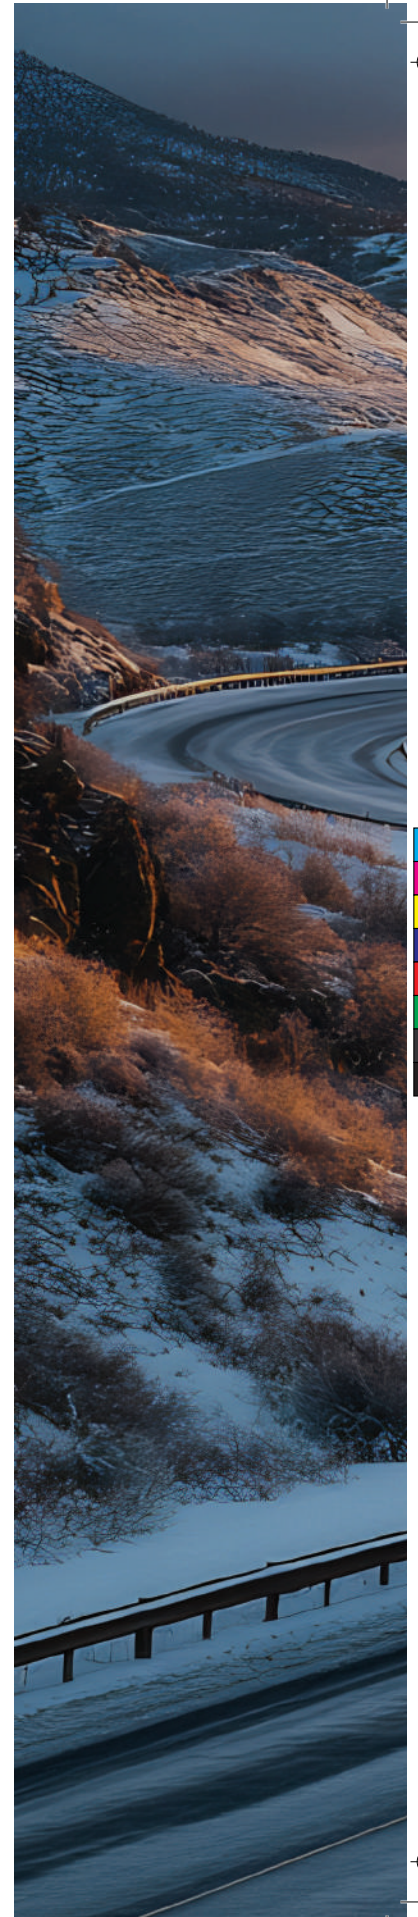





Condensing Unit

Product List



Coolco Condensing Unit

A vital component in refrigeration systems, the compressor circulates refrigerant to enable efficient cooling. Built for reliability and durability, Coolco condensing unit deliver consistent performance across various applications.

Model			CC-003M4R1/ZBC	CC-005LR1/ZSIC	CC-004MR1/YMI
Compressor Model			ZB21KQE	ZSI15KQE	YM70E1G
Type			Side blow	Side blow	Side blow
Temperature (°C)			-21°C - +5°C	-30°C - 0°C	-30°C - +10°C
Refrigerant			R404A	R404A	R404A
Power Supply			380V/3PH/50Hz	380V/3PH/50Hz	380V/3PH/50Hz
Condenser			Fan Qty *Dia (mm)	1x450	2x400
			Air Flow (m³/h)	1x5100	2x3900
			Power of Fan (W)	1*250	2*180
			Fan Voltage	220V/1PH/50Hz	380V/3PH/50Hz
			Capacity (KW)	9.1	13.6
Compressor Capacity	Evaporating	Cooling Capacity (KW)	5500	9490	9685
	Tempe -5°C	Input (KW)	3	4.73	3.9
	Evaporating	Cooling Capacity (KW)	4550	7940	5951
	Tempe -15°C	Input (KW)	3	4.6	3.9
	Evaporating	Cooling Capacity (KW)	3750	5530	3662
	Tempe -25°C	Input (KW)	3.1	4.3	4
	Evaporating	Cooling Capacity (KW)	3100	3550	2956
	Tempe -35°C	Input (KW)	3.1	4	3.3
Pipe	Suction inlet (mm)		3/4"	7/8"	7/8"
	Liquid Dia (mm)		1/2"	1/2"	1/2"
Overall Dimension L*W*H (mm)			1300x560x690	1300x560x990	1300x560x990

❄ Condensing Temperature 50°C, subcooling OK





Discover More Cooling Solutions

Scan the barcode to view Prima Prospek
Indonesia's complete product lines.
www.coolconnection.co.id



Evaporator

Product List



Coolco Evaporator

Essential for absorbing heat within refrigeration systems, the evaporator ensures optimal cooling efficiency. Engineered for reliability and long-lasting performance, Coolco evaporators deliver consistent results in diverse applications.

Series		CCM-30			Series		CCM-40	
Model		1-0805045	2-0805045	3-0805045	Model		2-0807060	3-0807060
Ref Capacity	SC1 (Kw)	3.3	6.6	9.4	Ref Capacity	SC1 (Kw)	12.1	17.7
	SC2 (Kw)	2.2	4.5	6.4		SC2 (Kw)	8.2	12.1
Fan Qty	φ300	1	2	3	Fan Qty	φ300	2	3
Power of Fan	Kw	0.11	0.22	0.33	Power of Fan	Kw	0.32	0.48
Fan Current	A	0.19	0.38	0.57	Fan Current	A	1	1.5
Air Flow	m³/h	1320	2640	3960	Air Flow	m³/h	5560	8340
Air Throw	m	6	6	6	Air Throw	m	8	8
Noise	dB	58	59	60	Noise	dB	60	61
Defrost Power	Kw	1.08	2.15	3.25	Defrost Power	Kw	3.84	5.76
Tube Volume	dm³	2	4	6	Tube Volume	dm³	7.5	11.2
Connection	φmm	φ12/φ12	φ12/φ22	φ12/φ22	Connection	φmm	φ16/φ28	φ16/φ28
Dimensions	A	740	1190	1640	Dimensions	A	1490	2090
	B	/	450	450		B	600	600
Weight	C	480	480	48	Weight	C	630	630
	Kg	30	43	54		Kg	68	93





Evaporator

Product List



Coolco Evaporator

The Coolco Evaporator delivers efficient heat absorption for optimal cooling performance. Designed with advanced technology, it ensures reliable operation and durability across various refrigeration applications.

Series		CCU-30			Series		CCU-40	
Model		1-0805045	2-0805045	3-0805045	Model		2-0807060	3-0807060
Ref Capacity	SC3 (Kw)	1.2	2.4	3.4	Ref Capacity	SC1 (Kw)	4.4	6.5
	SC4 (Kw)	1.0	2.0	2.9		SC2 (Kw)	3.8	5.6
Fan Qty	φ300	1	2	3	Fan Qty	φ300	2	3
Power of Fan	Kw	0.11	0.22	0.33	Power of Fan	Kw	0.32	0.48
Fan Current	A	0.19	0.38	0.57	Fan Current	A	1	1.5
Air Flow	m³/h	1480	2860	4240	Air Flow	m³/h	5730	8530
Air Throw	m	6	6	6	Air Throw	m	8	8
Noise	dB	58	59	60	Noise	dB	60	61
Defrost Power	Kw	1.44	2.88	4.32	Defrost Power	Kw	4.80	7.20
Tube Volume	dm³	2	4	6	Tube Volume	dm³	7.5	11.2
Connection	φmm	φ12/φ12	φ12/φ22	φ12/φ22	Connection	φmm	φ16/φ28	φ16/φ28
Dimensions	A	740	1190	1640	Dimensions	A	1490	2090
	B	/	450	450		B	600	600
	C	480	480	480		C	630	630
Weight	Kg	29	41	52	Weight	Kg	65	88



Discover More Cooling Solutions

Scan the barcode to view Prima Prospek Indonesia's complete product lines.
www.coolconnection.co.id



Evaporator

Product List



Coolco Evaporator

Essential for absorbing heat within refrigeration systems, the evaporator ensures optimal cooling efficiency. Engineered for reliability and long-lasting performance, Coolco evaporators deliver consistent results in diverse applications.

Series		CCL-45G							
Model		2-0808085	3-0808085	4-0808085	2-1008085	3-1008085	2-1208085	3-1208085	4-1208085
Ref Capacity	SC3 (Kw)	12.8	19.0	25.6	17.5	22.2	16.1	24.2	32.2
	SC4 (Kw)	9.7	14.4	19.4	11.6	17.5	13.1	19.7	26.3
Fan Qty	φ500	2	3	4	2	3	2	3	4
Power of Fan	Kw	0.86	1.29	1.72	0.86	1.29	0.86	1.29	1.72
Fan Current	A	2	3	4	2	3	2	3	4
Air Flow	m³/h	11300	16950	22600	10860	16290	10280	15570	20860
Air Throw	m	26	26	26	25	25	23	23	23
Noise	dB	63	64	65	63	64	63	64	65
Defrost Power	Kw	6.8	10.2	13.6	6.8	10.2	6.8	10.2	13.6
Tube Volume	dm³	12.1	18.1	24.1	15.1	22.7	18.1	27.2	36.3
Connection	φmm	16/28	16/35	16/35	16/28	16/35	16/28	22/42	28/54
Dimensions	A	1990	2840	3690	1990	2840	1990	2840	3690
	B	850	850	850	850	850	850	850	850
	C	880	880	880	880	880	880	880	880
Weight	Kg	92	129	166	99	140	106	150	194





Evaporator

Product List



Coolco Evaporator

The Coolco Evaporator delivers efficient heat absorption for optimal cooling performance. Designed with advanced technology, it ensures reliable operation and durability across various refrigeration applications.

Fin Spacing: 6mm		
Model		Y6E402B
Capacity (Kw)	Ta 0°C, Te -8°C	7.1
	Ta -18°C, Te -25°C	5.7
Air Volume	m³/h	5600
Common Data		
Fan Qty.	NO.	2-φ400
Fan Power	Kw	0.32
Fan Current	A	1
Air Throw	m	8
Noise	dB	60
Defrost Power	Kw	3.84
Tube Volume	dm³	7.5
Connection	φmm	φ16/φ28
Weight	Kg	66
Dimensions	A	1520
	B	600
	C	630



Discover More Cooling Solutions

Scan the barcode to view Prima Prospek Indonesia's complete product lines.
www.coolconnection.co.id



Compressor

Product List



ATD 60 XL

Wanbao Compressor | R134A

Power Supply	220V / 50Hz/60Hz
Applications	LBP
Motor Type	RSCR,RSIR
Displacement (cm³)	6



ANA 90 XL

Wanbao Compressor | R134A

Power Supply	220-240V ~50/ 60Hz
Applications	LBP, MBP
Motor Type	CSIR
Displacement (cm³)	8.8



ATA 80 XL

Wanbao Compressor | R134A

Power Supply	220-240V ~50/ 60Hz
Applications	LBP
Motor Type	RSCR
Displacement (cm³)	8.0



ANA 120 XL

Wanbao Compressor | R134A

Power Supply	220-240V ~50/ 60Hz
Applications	LBP, MBP
Motor Type	CSR
Displacement (cm³)	12.1



FTK 45 X

Wanbao Compressor | R290

Power Supply	220V / 50Hz/ 60Hz
Applications	LBP, MBP
Motor Type	RSCR
Displacement (cm³)	4.5



FTK 80 X

Wanbao Compressor | R290

Power Supply	220-240V ~50/ 60Hz
Applications	LBP, MBP
Motor Type	RSCR
Displacement (cm³)	8.0



ETA 95 X

Wanbao Compressor | R600

Power Supply	220V/50Hz/60Hz
Applications	LBP
Motor Type	RSIR
Displacement (cm³)	9.5



ETY 110 XL

Wanbao Compressor | R600

Power Supply	220-240V ~50/ 60Hz
Applications	LBP
Motor Type	RSCR
Displacement (cm³)	11



ETK 130 L

Wanbao Compressor | R600

Power Supply	220-240V /50Hz
Applications	LBP
Motor Type	RSCR
Displacement (cm³)	13



ENK 150 KL

Wanbao Compressor | R600

Power Supply	220-240V /50Hz
Applications	LBP, MBP
Motor Type	RSCR
Displacement (cm³)	15.1





Compressor | Product List



F 60 HL
Huayi Compressor | R134A

Power Supply	168 W
Applications	LBP
Motor Type	RSIR
Displacement	6.0 cc
Ref.HP	1/6-1/5



E 95 HBL
Huayi Compressor | R134A

Power Supply	-
Applications	LBP, MBP
Motor Type	RSCR
Displacement	9.83 cc
Ref.HP	1/4



X 150 HL
Huayi Compressor | R134A

Power Supply	410 W
Applications	LBP
Motor Type	CSR
Displacement	15.30 cc
Ref.HP	1/2



E 100 CL
Huayi Compressor | R600A

Power Supply	165 W
Applications	LBP
Motor Type	RSCR
Displacement	9.8 cc
Ref.HP	1/6



E 65 UBL
Huayi Compressor | R290

Power Supply	285 W
Applications	LBP
Motor Type	RSCR
Displacement	6.30 cc
Ref.HP	1/4



B 43 U
Huayi Compressor | R290

Power Supply	185 W
Applications	LBP
Motor Type	RSIR
Displacement	4.30 cc
Ref.HP	1/5



Discover More Cooling Solutions
Scan the barcode to view Prima Prospek
Indonesia's complete product lines.
www.coolconnection.co.id





Compressor

Product List



GH 16 FA

Cubigel Compressor | R134A

Applications	LBP
Motor Type	CSIR
Displacement	15.30 cc
Ref.HP	1/2



GH 12 FA

Cubigel Compressor | R134A

Applications	LBP
Motor Type	CSIR
Displacement	11.30 cc
Ref.HP	1/3



GH 12 TB

Cubigel Compressor | R134A

Applications	HBP
Motor Type	CSIR
Displacement	12 cc
Ref.HP	3/8



GPY 16 RA

Cubigel Compressor | R134A

Applications	HBP, MBP
Motor Type	CSR
Displacement	16.15 cc
Ref.HP	1/2



GPY 18 RA

Cubigel Compressor | R134A

Applications	HBP
Motor Type	CSR
Displacement	18 cc
Ref.HP	1/8



MPT 18 LA

Cubigel Compressor | R404A/R507

Applications	LBP
Motor Type	CSR
Displacement	18 cc
Ref.HP	5/8



MPT 16 LA

Cubigel Compressor | R404A/R507

Applications	LBP
Motor Type	CSR
Displacement	16.15 cc
Ref.HP	1/2





Compressor

Product List



Siberia Compressor

Siberia Compressors offer robust and efficient performance, engineered for reliability and longevity in diverse refrigeration systems. Ideal for maintaining consistent cooling in demanding environments.

No.	Product Name	Application	Freon Type	Ref.HP
1	GSF 45 AT	1/8	LBP	R 134
2	GATF 57 AA	1/6	LBP	R 134
3	GFF 57 AA	1/6	LBP	R 134
4	GFF 66 AA	1/6	LBP	R 134
5	GFF 75 AA	1/5	LBP	R 134
6	GFF 86 AA	1/4	LBP	R 134
7	GFF 93 AA	1/4	LBP	R 134
8	GFM12AA	1/3	LBP	R 134
9	GBE 16 AA	1/2	LBP	R 134
10	BSR 72 AA	1/8	LBP	R 600A
11	BATK 90 AA	1/6	LBP	R 600A
12	BATR 115 AY	1/5	LBP	R 600A
13	BFF 14 AA	1/4	LBP	R 600A

F Series Siberia Compressor



S Series Siberia Compressor




Discover More Cooling Solutions
Scan the barcode to view Prima Prospek
Indonesia's complete product lines.
www.coolconnection.co.id



Water Chiller

Further Develop Product

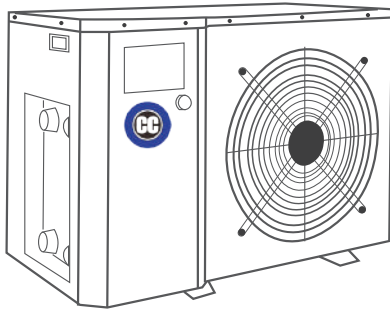

Coolco Water Chiller

Coolco Water Chillers deliver efficient and reliable cooling solutions, designed for optimal temperature control in commercial and industrial applications. Built for durability and energy efficiency.

Water Chiller / Heater

Item No	Power (HP)	Input Voltage	Size LxWxH/ LlxW1 (mm)	One to One	One to Two	Refrigeration Capacity	Heating Capacity	Water Capacity
CC-002-015-1	1.5	220V / 50Hz	750x420x545/ 410x465	*		3500W	3500W	0.5-1.5M3
CC-002-015-2	1.5	220V / 50Hz	750x420x545/ 410x465		*	3500W	3500W	0.5-1.5M3
CC-002-020-1	2.0	220V / 50Hz	830x430x580 400x440	*		5300W	5300W	1.0-2.0M3
CC-002-020-2	2.0	220V / 50Hz	830x430x580 400x440		*	5300W	5300W	1.0-2.0M3
CC-002-030-1	3.0	220V / 50Hz	904x469x657 450x470	*		7200W	7200W	2.0-3.0M3
CC-002-030-2	3.0	220V / 50Hz	904x469x657 450x470		*	7200W	7200W	2.0-3.0M3

Refrigerant: 410A / Deviation of Temperature: $\pm 2^{\circ}$ / Warranty: 2 Years



Discover More Cooling Solutions


Scan the barcode to view Prima Prospek
Indonesia's complete product lines.
www.coolconnection.co.id





Monoblock

Further Develop Product



Coolco

Wall Mount Monoblock Refrigeration Unit

Coolco Monoblocks provide compact, reliable cooling with easy installation. Designed for efficiency and consistent performance in various refrigeration settings.

Model		CCTCN10EL	CCTCN20EL	CCTCN30EL	CCTCN40EL
Horsepower		1 HP	2 HP	3 HP	4 HP
Power Supply		Side blow	Side blow	Side blow	Side blow
Ambient Temp (°C)		220V/50Hz or 220V/60Hz			
Evap Temp Range (°C)		-7-43°C			
Refrigerant		-35 - -5°C			
Compressor		@ R404A, R448A, R449A			
Rated Input Power		CRSS			
Speed Range		780	1550	2260	3200
Max. Run Current (A)		30- 80Hz			
Pressure Control		5	9	13	18
Defrost		High pressure switch / low pressure switch			
Condenser Fan Motor	Power (W)	Hot gas defrost			
	Qty (Pcs)	120	150	120	150
Evaporator Fan Motor	Power (W)	1	1	2	2
	Qty (Pcs)	80	120	80	120
External Dimension: Length*Width*Height (mm)		1 600*810*710	1 720*910*920	2 925*960*950	2 1020*1030*950
Net Weight (Kg)		71Kg	82Kg	105Kg	150Kg
Package Size: Length*Width*Height (mm)		690*900*920	830*1030*1040	1040*1030*1030	1130*1130*1140
Total Weight of Packaging		96Kg	110Kg	135Kg	185Kg
Applicable Volume	+2°C Cabinet Temperature	12m³	25m³	40m³	55m³
	-18°C Cabinet Temperature	7m³	15m³	25m³	35m³
Refrigeration Capacity		Test conditions: Ambient temp: 32°C, Speed: 70Hz			
Evap Temp (°C)	-5	2250	4280	6850	9100
	-15	1560	3050	4350	5800
	-25	1020	2300	3230	4050
	-35	760	1520	2050	2840



Refrigerants

Product List

REFRIGERANT



Refrigerant



R-32
Refrigerant



R-134A
Refrigerant



R-404A
Refrigerant



R-407C
Refrigerant



R-407C
Refrigerant



R-410A
Refrigerant



R-410A
Refrigerant



R-507A
Refrigerant



R-290
Refrigerant



R-600
Refrigerant



R-22
Refrigerant

Chemours



R-22
Chemours



R-134A
Chemours



R-404A
Chemours



R-407C
Chemours



R-410A
Chemours



R-507A
Chemours

Honeywell



R-507A
Honeywell



R-134A
Honeywell




R-404A
Honeywell



R-407C
Honeywell



R-410A
Honeywell



Discover More Cooling Solutions

Scan the barcode to view Prima Prospek
Indonesia's complete product lines.
www.coolconnection.co.id





Our Gallery and Portfolio

Over the years, we have participated in numerous exhibitions and gained extensive experience through partnerships with leading brands. Our team has handled a wide spectrum of refrigeration and cooling requirements, serving businesses of all sizes from small enterprises to large industries across various sectors.



Cooling Solutions for Every Industry Every Scale.

Our Valued Clients

Indofood CBP

Coca-Cola EUROPACIFIC PARTNERS

YOSHINOYA
JAPANESE RESTAURANT

THE HARVEST
Cakes, Bread & More...

SANBE

SUSHI TEI
A Good Deal of Sushi

PT. ROTAL TEKNIK MERUPANG
GEA BSA BERSAMA

APPLE DONUT & BAKERY

LION STAR
PLASTICS

PLASTIK

PULLMAN
HOTELS AND RESORTS

PT. ALPINE COOL UTAMA

KALMED
MANURAKTUR INDONESIA

THE EXCELTON

Committed to delivering the right refrigeration solutions for every business.

Contact Us!

Office:

PT Prima Prospek Indonesia

Ruko City Square Blok B11-12
Jl. Peta Selatan Kalideres
Jakarta Barat 11840

Call: 6221 2252 0288

Fax: 6221 2252 0511

Phone: 6281 1137 9877

Email: sales@primaproспек.co.id

Website: www.primaproспек.co.id
www.coolconnection.co.id

Shop:

PT Prima Prospek Indonesia

Jl. Raya Cibirusah Ruko Cikarang Point
No.31, Suka Resmi, Lippo Cikarang,
Cikarang - Jawa Barat

Call: 6221 8967 7076

Phone: 6281 3808 87585