

Technical Data Sheet



Fi-Fix Antenna Mount
SKU: MQ-ANT-MNT

MarQuest's new Antenna Mount is designed for AccelTex and Ventev antennas with the option to add our AP Drop Mount.

Offering two mounting methods, it can be hung using 25mm conduit and conduit nut or by threaded bars, dropped from a ceiling using common methods such as uni-strut.


As part of our Fi-Fix Modular Mounts range, the Antenna Mount can be used with our AP Drop Mount with interchangeable Mounting Plates, coming in two sizes suited for your needs.

The Mounting Plates easily slide in and are secured in place with a discrete latch mechanism.


This unique design offers space for cables which can be hidden by our Type B mount for a tidy and neat look.

Antennas and access points can be attached using their manufacturer-specific mechanisms.

See Fi-Fix Modular Mounts Product Buying Guide for more information.

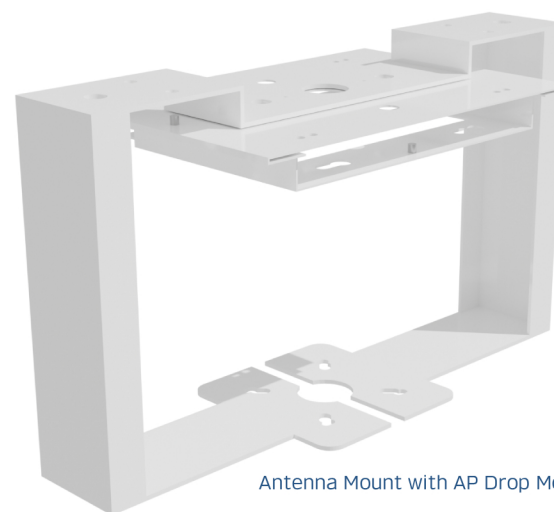

Antenna Mount with AP Drop Mount (Type A)

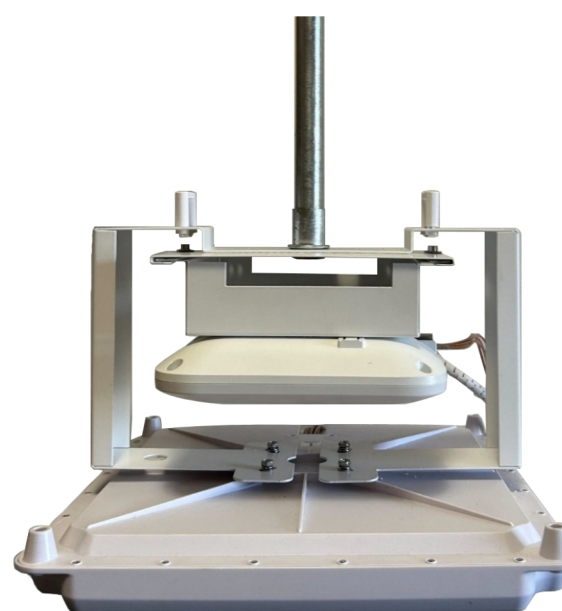

Antenna Mount with AP Drop Mount (Type B)

Features

Material: Zintec (Zinc Coated Metal)

Size: 36cm (W) x 20.3cm (H) x 6cm (D)

Weight: 1.17kg Antenna Mount
1.96kg with Drop Mount Type A
2.18kg with Drop Mount Type B


Recommended Temperature Range: 10°C - 50°C

Add On: Drop Mount with Type A / B, Conduit

Installation: 25mm Conduit / Threaded Bar. Indoor use only

Colour: White Powder Coated Steel

Supported Antennas: AccelTex and Ventev

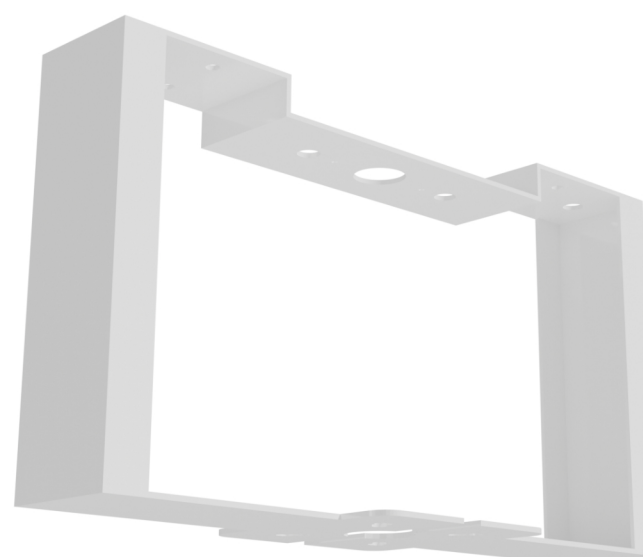

Antenna Mount

Document Title:	Fi-Fix Antenna Mount Data Sheet
Version Status:	Issued
Classification:	Public
Approved by:	R McGinnis
Approval Date:	14/05/2026
Version:	1.0





Disclaimer:

To ensure optimal performance and longevity, please handle the product with care. MarQuest is not responsible for damage resulting from misuse, accidental drops, or improper handling.

Please note: The design of this product is a registered design and is protected under applicable intellectual property laws. Unauthorised reproduction or imitation is strictly prohibited.

Maximum Safe Working Load:

20 kg Based on installation using approved fixings into structurally sound surfaces, in accordance with Installation Guide. Do not exceed the specified safe working load.

Installation:

Please refer to the Fi-Fix Antenna Mount Installation Guide. This mount must be installed by a competent person using suitable fixings appropriate for the mounting surface. Installer is responsible for verifying the structural suitability of the mounting surface and selecting appropriate fixing methods where supplied fixings are unsuitable. Failure to install correctly may result in damage or injury. Product is intended for indoor mounting of Wi-Fi Access Point and Antenna equipment only.

Product Range:

Please refer to the Fi-Fix Modular Mounts Product Buying Guide.

Waste Disposal Information:

The Fi-Fix Antenna Mount is made of recyclable steel.

Disposal Recommendation:

Please contact your local License Waste Carrier to arrange disposal of this product.

Environmental Consideration:

Please dispose of responsibly and avoid littering.

For the most accurate and up-to-date guidance, consult your local council's waste disposal guidelines.

Country of Origin:

England

Manufacturer:

MarQuest Limited, 22 Trinity Lane, Beverley, HU17 0DY

UK Registered Design Number:

6478392

6478395

Revision Date	By	Number	Details
14/05/2026	NM	1.0	Initial Release

www.marquest.com
+44 1482 886161
enquire@marquest.com

