

# ATEM 2 M/E Advanced Panel 20



The 2 M/E model features 2 M/E rows with 20 input buttons and 2 independent system control LCDs for each row. Plus each row can control up to 4 M/Es in larger switchers. Both rows and all input buttons include LCDs for custom labeling. Each row also includes an independent select bus!

\$6,159

**Preview Transition** 


### Connections

### Ethernet

 $4 \times 10/100/1000$  BASE-T with loop output for additional control panels or computers.

### **Software Updates**

1 x USB-C for firmware updates.

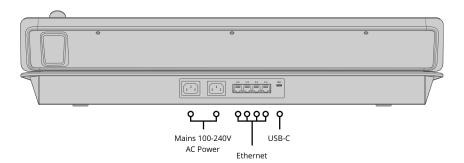

## **Product Specifics**

**Number of Mix Effects Rows** 

2	6 rows 24 character LCD	2
Direct Cross Points 20	<b>On-Air indicator</b>	<b>Transition Rate Displays</b> Via main menu
Shifted Cross Points 40	<b>Power Status Indicators</b> None	LCD Menu Displays
Crosspoint Button Type Tri-Color LED	DSK Transition Selectors 4 x Auto, Cut, Tie/Preview	Menu Control 2 x 20 buttons

**Crosspoint Label** 

**Dedicated Macro Buttons** 

Numeric Keypad

2

**Transport Control Buttons** 

8

2 x 20

Fader Bar

**Source Select Bus** 

2

3 Axis Joystick

1

Software

**Destination Bus** 

## **Software Applications**

ATEM Software Control Panel.

## Operating Systems



Mac 13.0 Ventura, Mac 14.0 Sonoma or later.



Windows 10 and 11.

## Power Requirements

Input Voltage

2 x Internal 100 - 240V AC.

**Redundant Power** 

Yes

**Power Usage** 

100W

# Physical Specifications







Environmental Specifications			
Operating Temperature 0° to 40° C (32° to 104° F)	Storage Temperature -20° to 60° C (-4° to 140° F)	<b>Relative Humidity</b> Up to 95%	
What's Included			
ATEM 2 M/E Advanced Panel 20			
Warranty			
12 Month Limited Manufacturer's Warrant	y.		
All items on this website are copyright Blackmagic Design Pty. Ltd. 2024, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. Privacy Policy			
Blackmagic Design Authorized R	eseller		