


PINOUT ORANGE PI RV2 V1.1

FUNCIÓN	FUNCIÓN	FUNCIÓN	GPIO	Nº GPIO	wPi	PIN	PIN	Nº GPIO	wpi	GPIO	FUNCIÓN	FUNCIÓN	FUNCIÓN
			3.3V			1	2			5V			
		AP_I2C4_SDA	GPIO52	52	0	3	4			5V			
		AP_I2C4_SCL	GPIO51	51	1	5	6			GND			
		PWM9 (c0888a00)	GPIO74	74	2	7	8	47	3	GPIO47	AP_I2C3_SCL		
	UART5_RXD		GND			9	10	48	4	GPIO48	AP_I2C3_SDA		
			GPIO71	71	5	11	12	70	6	GPIO70		UART5_TXD	
		UART9_TXD	GPIO72	72	7	13	14			GND			
		UART9_RXD	GPIO73	73	8	15	16	91	9	GPIO91			
			3.3V			17	18	92	10	GPIO92	PWM7(d401bc00)		
		SPI3_MOSI	GPIO77	77	11	19	20			GND			
		SPI3_MISO	GPIO78	78	12	21	22	49	13	GPIO49			
UART8_TXD	CAN_TX0	SPI3_CLK	GPIO75	75	14	23	24	76	15	GPIO76	SPI3_CS	CAN_RX0	UART8_RXD
			GND			25	26	50	16	GPIO50			



[Lista de reproducción RISC-V. Novedades. Ejemplos. Actualizaciones....](#)

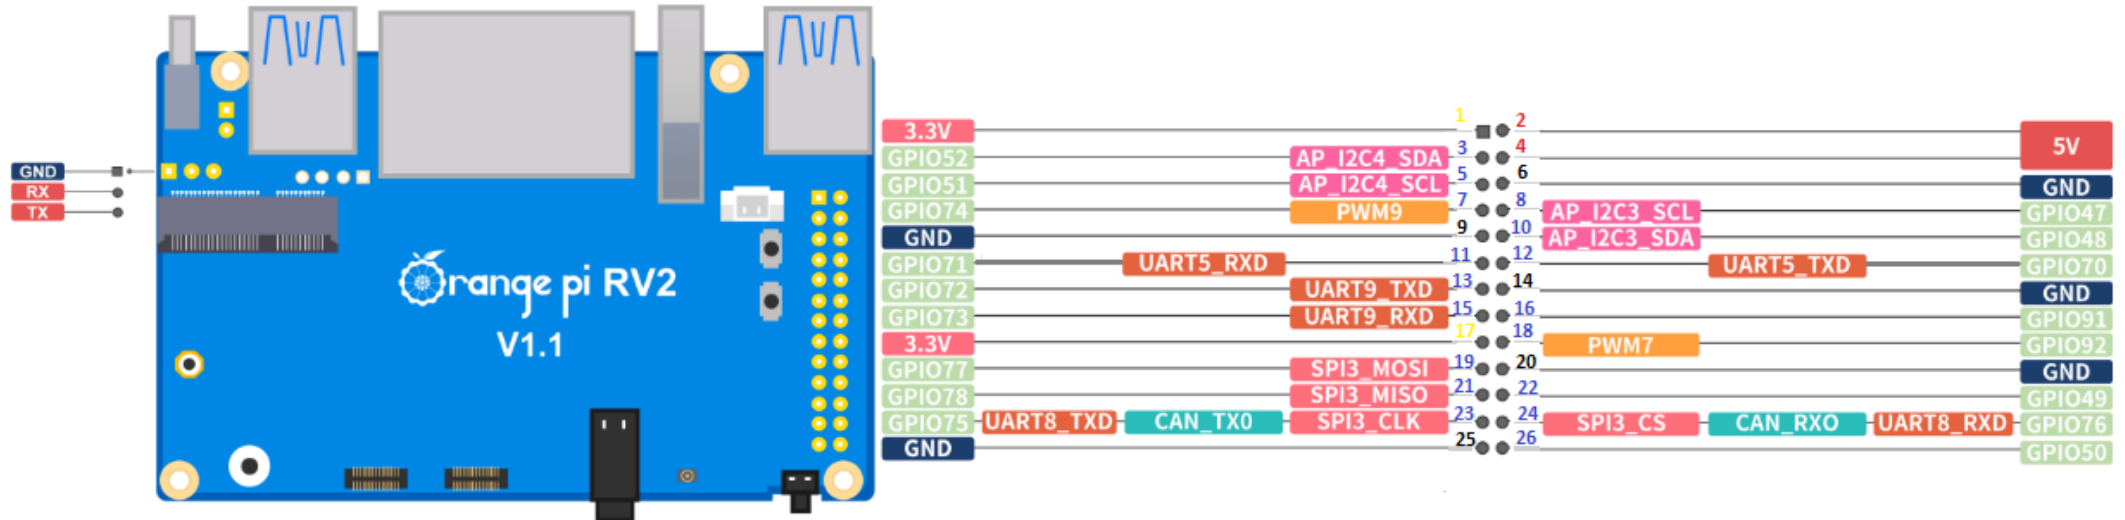