




Adaptador extremos Clamp x brida

Clamp x 150 # FF Flange Adapter - JB 38MP

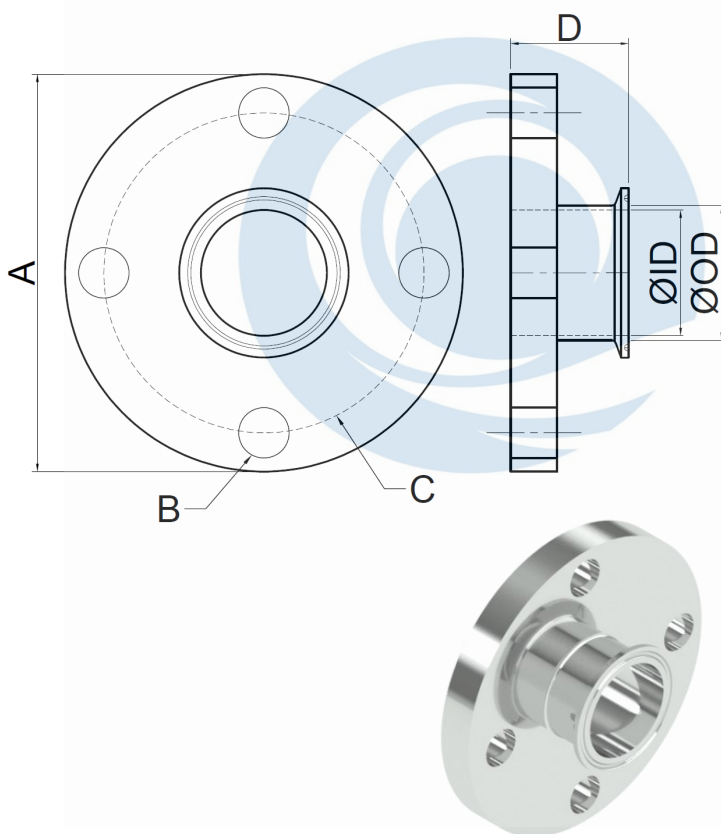

Clamp x 150 # FF Flange Adapter - JB 38MP

SIZE	ØOD	ØID	A	B	C	D	Holes	# Part. Ac.Inox 304/316L
1/2"	0.500" 12.7 mm	0.370" 9.4 mm	3.500" 88.9 mm	0.625" 15.88 mm	2.375" 60.33 mm	1.625" 41.28 mm	4	JB 38MP 304 15 JB 38MP 316L 15
3/4"	0.750" 19.05 mm	0.620" 15.75 mm	3.875" 98.43 mm	0.625" 15.88 mm	2.750" 69.85 mm	1.625" 41.28 mm	4	JB 38MP 304 20 JB 38MP 316L 20
1"	1.000" 25.4 mm	0.870" 22.1 mm	4.250" 107.95 mm	0.625" 15.88 mm	3.125" 79.38 mm	1.625" 41.28 mm	4	JB 38MP 304 25 JB 38MP 316L 25
1-1/2"	1.500" 38.1 mm	1.370" 34.8 mm	5.000" 127 mm	0.625" 15.88 mm	3.875" 98.43 mm	1.625" 41.28 mm	4	JB 38MP 304 40 JB 38MP 316L 40
2"	2.000" 50.8 mm	1.870" 47.5 mm	6.000" 152.4 mm	0.750" 19.05 mm	4.750" 120.65 mm	1.750" 44.45 mm	4	JB 38MP 304 50 JB 38MP 316L 50
2-1/2"	2.500" 63.5 mm	2.370" 60.2 mm	7.000" 177.8 mm	0.750" 19.05 mm	5.500" 139.7 mm	1.750" 44.45 mm	4	JB 38MP 304 65 JB 38MP 316L 65
3"	3.000" 76.2 mm	2.870" 72.9 mm	7.500" 190.5 mm	0.750" 19.05 mm	6.000" 152.4 mm	1.750" 44.45 mm	4	JB 38MP 304 80 JB 38MP 316L 80
4"	4.000" 101.6 mm	3.834" 97.38 mm	9.000" 228.6 mm	0.750" 19.05 mm	7.500" 190.5 mm	1.750" 44.45 mm	8	JB 38MP 304 100 JB 38MP 316L 100
6"	6.000" 152.4 mm	5.782" 146.86 mm	11.000" 279.4 mm	0.875" 22.23 mm	9.500" 241.3 mm	2.188" 55.56 mm	8	JB 38MP 304 150 JB 38MP 316L 150

