


IN6000CE

GASOLINE GENERATOR

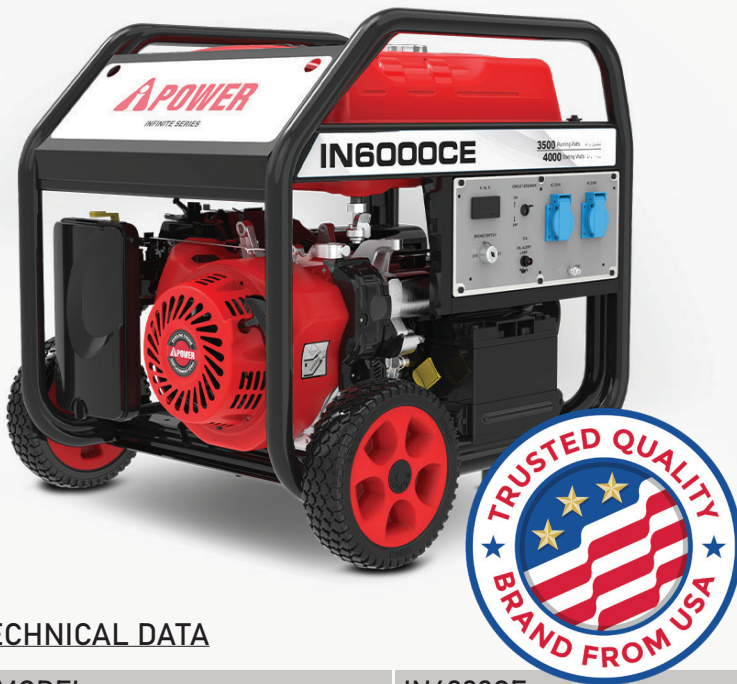

FEATURES

- ◆ Easy Recoil and Key Start
- ◆ 223cc/7.5hp Powerful Gasoline Engine
- ◆ High Performance Alternator
- ◆ Long Run Time @50 %Load: 9 Hours
- ◆ Intelligent Siliconed AVR
- ◆ Digital 3-in-1 Hour Meter
- ◆ Built-in Fuel Gauge
- ◆ Low Oil Shutdown
- ◆ Rigid Low Tone Muffler
- ◆ Never-Flat Wheel for Effortless Move

TECHNICAL DATA

| | |
|-----------------------------|---------------------------|
| MODEL | IN6000CE |
| Max Starting Power | 4000W |
| Running Power | 3500W |
| AVR | √ |
| AC Load (Volts) | 230 |
| Phase, Frequency | Single, 50Hz |
| Rated Amperage | 15.2A |
| Starting Method | Manual/E-start |
| Engine Type | OHV, Air-Cooled, Gasoline |
| Engine Model/CC/Hp | 170FBD/223cc/7.5Hp |
| Low Oil Shut Down | √ |
| Fuel Tank Capacity | 15L |
| Run Time-50 %Load | 9.0Hrs |
| Run Time-100 %Load | 6.0Hrs |
| Fuel Consumption (50 %Load) | 1.7L/Hr |
| Engine Oil Capacity | 0.6L |
| Display | 3-in-1 Meter |
| Low Oil Alert Lamp | √ |
| Circuit Breaker | √ |
| Socket | 2x16A |
| Steel Frame | Φ25 |
| Fold Down Handle | √ |
| Battery | 7AH |
| Spark Plug Socket | √ |
| Plug | N/A |
| Wheel Kits | √ |
| Net Weight | 52Kg |
| Gross Weight | 54Kg |
| Packing Dimension(LxWxH) | 615x480x520mm |
| Q'ty (20GP/40HQ) | 168/455 |

