

4000W INVERTER GENERATOR




Starting Power	4000W
Rated Power	3500W
Noise Level	58dB
Frequency	50/60Hz

AiPower SM4500Di inverter generator provides clean, quiet 4,000 starting watts and 3,500 running watts. It is great for your outdoor events such as concerts, camping trips, tailgating parties, racetracks, RVs, and more. At only kgs, you can take portable power wherever you go. At 58dBA @ %50 Load at 7m, you are assured quiet operation. The generator features a 9-in-1 intelligent digital meter, which indicates the data of voltage, run hours, frequency, power level, fuel level, output indicator, overload alarm, and low oil alert.

SPECIFICATION

MODEL	SM4500Di
Max Starting Power	4000W
Running Power	3500W
AC Load (Volts)	240
Phase, Frequency	Single, 50/60Hz
Rated Amperage	15.2A
Starting Method	E-Start / Remote
Engine Type	Gasoline
Engine Model/CC/Hp	SV223/230cc/7.5Hp
Noise Level	60dB
Fuel Tank Capacity	10.0L
Run Time-50 %Load	8.0Hrs
Run Time-100 %Load	5.5Hrs
Fuel Consumption	1.0L/Hr (50 %Load)
Engine Oil Capacity	0.6L
Digital Display	9-in-1 Meter
Circuit Breaker	9.0A, 16.0A
Eco-Throttle	✓
Parallel Port	✓
Socket	1x16A, 1x30A
DC Port	✓
THD	<%3
Battery	7AH
Wheel	6in
Plug	1x32A, DC Plug
Net / Gross Weight	50 / 52Kg
Product Dimension(LxWxH)	605x488x560mm

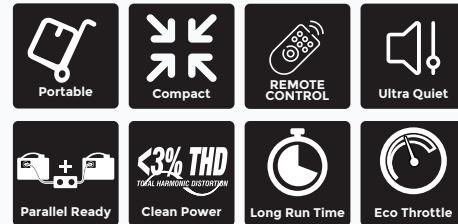

FEATURES

- Ultra Quiet : 58dB
- Digital inverter technology
- Safe Clean Power
- Economy mode to save fuel
- Overload protection
- Intelligent 9-in-1 Volt Meter
- Parallel capability
- Versatile for Powering Worldwide Electronics

GREAT CHOICE FOR:

