


BenefitAll Supply Chain Agricultural Equipment



**BenefitAll Supply Chain
(Shandong) Co.,Ltd.**

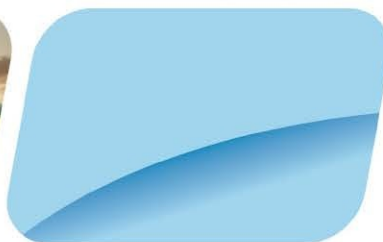

BenefitAll Supply Chain
(Shandong) Co., Ltd.

公司简介

Company profile

我司农业装备有限公司成立于2017年，是一家专注于轮式拖拉机产品研究、开发生产、及销售一体的综合技术企业。公司位于风景优美、自然条件优越的安丘市大汶河旅游开发区。

公司自成立以来，始终坚持以人为本、反应快、行动快、高效率的管理理念，荟萃业界精英，总结数年拖拉机生产及使用中的问题予以逐一攻破。以先进的信息技术、人性化的管理方法及企业经验与国内企业实际相结合，为客户提供优质的产品，减少劳动强度，提高作业效率。

公司主要生产30马力-300马力轮式拖拉机。公司从材料，零部件的入厂检验到产品出厂的安全检测，全过程均有专业的技术人员把关，确保产品质量一流。产品远销国内重要农业大省，我公司拥有2个自主品牌，在业界有良好的口碑和销售。

公司以质量第一，客户第一，信誉第一为宗旨，努力为国内外用户提供最优质的产品和服务。

BenefitAll Supply Chain Agricultural Equipment factory, founded in 2017, is a comprehensive technology enterprise focusing on the research, development, production and sales of wheeled tractor products. Our company is located in Dawenhe Tourism Development zone in Anqiu City, with beautiful scenery and superior natural conditions.

Since the establishment of the company, we always adhere to the talent-based, integrity-based business principles, adhere to the quick response, quick action of efficient management philosophy, gather the industry elites and summarize the problems in production and use of tractors and solve them one by one. With advanced information technology, humanized management methods and the combination of enterprise experience and the actual situation of domestic enterprises, we provide customers with high quality products to help them reduce labor intensity and complete agricultural work efficiently and smoothly.

Our company mainly produces 30-300hp wheeled tractors, which are exported to major agricultural provinces at home and abroad. We have professional technicians to check the whole process from the incoming inspection of materials and parts to the pre-delivery inspection to ensure the first-class product quality. We have two independent brands with good reputation and sales performance in the industry, namely Shandong Ledi and Weifang Hongchuang Tractor.

We take quality first, customer first, reputation first as the purpose, and strive to provide the best quality products and the most satisfactory service for domestic and foreign customers.



企业实力

- 6000平方生产基地，20余种产品；
- 超1000家合作企业，产品远销国内重要农业大省；
- 专业的研发团队和技术人员；
- 现代化的生产线和优秀的管理团队。

Company Strength

- 6000 square meters production base
More than 20 models of tractors
- More than 1000 cooperative enterprises
Exported to major agricultural countries
- Professional R & D team and technical personnel
- Modern production line and excellent management team





BenefitAll Supply Chain
(Shandong) Co., Ltd.

产品型号 : LD504D(G4)

Model : LD504D(G4)

把控细节

Details Control

追求完美

Go for Perfect





LD504D(G4) 配置参数

项目	单位	参数
发动机功率	kW	36.8
驱动型式	/	四驱
整机外廓尺寸 (长x宽x高)	mm	2980x1315x2065 (安全架顶)
整机轮距 (前轮 / 后轮)	mm	990、1000、1100/1120-1220
整机常用轮距 (前轮 / 后轮)	mm	1110/1150
整机轴距	mm	1515
最小离地间隙	mm	210 (前桥放油螺塞)
最小使用质量	kg	1456
最小使用比质量	kg/kW	39.56
整机档位数	/	8/2
动力输出轴转速	r/min	720
轮胎型号 (前 / 后)	/	6.0-12/9.5-16

LD504D(G4) Configuration parameter

Items	Parameter
Engine Power	36.8KW/50HP
Driving Form	4-Wheel drive
Overall Dimensions (L*W*H)	2980×1315×2065mm (Top of safety frame)
Tread (Front / Rear Wheel)	990, 1000, 1100/1120-1220 mm
Commonly Used Tread (Front / Rear Wheel)	1110/1150mm
Wheelbase	1515mm
Minimum Ground Clearance	210mm (Front axle drain plug)
Minimum Service Quality	1456kg
Minimum Service Mass Ratio	39.56Kg/KW
Number of Gears	8/2
PTO Speed	720 r/min
Tyre type(Front/ Rear)	6.00-12/9.5-16

产品型号 : LD504(G4)

Model : LD504(G4)

把控细节

Details Control

追求完美

Go for Perfect



**BenefitAll Supply Chain
(Shandong) Co.,Ltd.**





LD504(G4)配置参数

项目	单位	参数
发动机功率	kW	36.8
驱动型式	/	四驱
整机外廓尺寸（长x宽x高）	mm	3385 × 1470 × 2250（安全架顶）
整机轮距（前轮 / 后轮）	mm	1200/1200、1250、1300
整机常用轮距（前轮 / 后轮）	mm	1200/1200
整机轴距	mm	1832
最小离地间隙	mm	310（前驱动桥底部）
最小使用质量	kg	1450
最小使用比质量	kg/kW	39.4
整机档位数	/	8/2
动力输出轴转速	r/min	540/720
轮胎型号（前 / 后）	/	7.50-16/11.2-28

LD504(G4) Configuration parameter

Items	Parameter
Engine Power	36.8KW/50HP
Driving Form	4-Wheel drive
Overall Dimensions (L*W*H)	3385×1470×2250mm (Top of safety frame)
Tread (Front / Rear Wheel)	1200/1200, 1250, 1300 mm
Commonly Used Tread (Front / Rear Wheel)	1200/1200 mm
Wheelbase	1832 mm
Minimum Ground Clearance	310mm (Bottom of front transaxle)
Minimum Service Quality	1450 kg
Minimum Service Mass Ratio	39.4 Kg/KW
Number of Gears	8/2
PTO Speed	540/720 r/min
Tyre type(Front/ Rear)	7.50-16/11.2-28



BenefitAll Supply Chain
(Shandong) Co., Ltd.

产品型号 : LD704(G4)

Model : LD704(G4)

澎湃动力

Surging Power

高效作业

Efficient Performance





LD704(G4) 配置参数 (含驾驶室款)

项目	单位	参数
发动机功率	kW	51.5
驱动型式	/	四驱
整机外廓尺寸 (长x宽x高)	mm	3485 × 1500 × 2265 (安全架顶) 3505 × 1555 × 2530 (简易驾驶顶部)
整机轮距 (前轮 / 后轮)	mm	1040、1056/1155-1300
整机常用轮距 (前轮 / 后轮)	mm	1040/1155
整机轴距	mm	1850
最小离地间隙	mm	300 (前驱动桥底部)
最小使用质量	kg	1970
最小使用比质量	kg/kW	38.25
整机档位数	/	8/8
动力输出轴转速	r/min	720/850
轮胎型号 (前 / 后)	/	7.50-16/11.2-28

LD704(G4) Configuration parameter (Including cab model)

Items	Parameter
Engine Power	51.5KW/70HP
Driving Form	4-Wheel drive
Overall Dimensions (L*W*H)	3485×1500×2265mm (Top of safety frame) 3505*1555*2530mm (Simple cab top)
Tread (Front / Rear Wheel)	1040, 1056/1155-1300mm
Commonly Used Tread (Front / Rear Wheel)	1040/1155mm
Wheelbase	1850mm
Minimum Ground Clearance	300mm (Bottom of front transaxle)
Minimum Service Quality	1970kg
Minimum Service Mass Ratio	38.25 Kg/KW
Number of Gears	8/8
PTO Speed	720/850 r/min
Tyre type(Front/ Rear)	7.50-16/11.2-28



BenefitAll Supply Chain
(Shandong) Co., Ltd.

产品型号 : 1004-B

Model : 1004-B

品质卓越

Excellent Quality

驰骋疆野

Gallop across Fields





1004-B 配置参数

项目	单位	参数
发动机功率	kW	73.5
驱动型式	/	四驱
整机外廓尺寸（长x宽x高）	mm	4120 × 1820 × 2665（安全架顶部）
整机轮距（前轮 / 后轮）	mm	1200、1350、1375、1450/1200 ~ 1700
整机常用轮距（前轮 / 后轮）	mm	1280/1400
整机轴距	mm	2030
最小离地间隙	mm	380（后牵引座底部）
最小使用质量	kg	3220
最小使用比质量	kg/kW	43.75
整机档位数	/	12/12
动力输出轴转速	r/min	540/760
轮胎型号（前 / 后）	/	9.5-24/14.9-30

1004-B Configuration parameter

Items	Parameter
Engine Power	73.5KW/100HP
Driving Form	4-Wheel drive
Overall Dimensions (L*W*H)	4120×1820×2665mm (Top of safety frame)
Tread (Front / Rear Wheel)	1200,1350,1375,1450/1200~1700 mm
Commonly Used Tread (Front / Rear Wheel)	1280/1400 mm
Wheelbase	2030 mm
Minimum Ground Clearance	380 mm (Bottom of rear traction)
Minimum Service Quality	3220 kg
Minimum Service Mass Ratio	43.75 Kg/KW
Number of Gears	12/12
PTO Speed	540/760 r/min
Tyre type(Front/ Rear)	9.5-24/14.9-30

产品型号 : 1204-A
Model : 1204-A

澎湃动力
Surging Power
高效作业
Efficient Performance



BenefitAll Supply Chain
(Shandong) Co.,Ltd.





1204-A 配置参数

项目	单位	参数
发动机功率	kW	88.3
驱动型式	/	四驱
整机外廓尺寸 (长x宽x高)	mm	4220 × 2060 × 2850 (安全架顶)
整机轮距 (前轮 / 后轮)	mm	1490、1630、1750、1850/1460-1740
整机常用轮距 (前轮 / 后轮)	mm	1450/1430
整机轴距	mm	2080
最小离地间隙	mm	385 (前桥底部)
最小使用质量	kg	3860
最小使用比质量	kg/kW	44.85
整机档位数	/	16/8
动力输出轴转速	r/min	760/850
轮胎型号 (前 / 后)	/	9.5-24/14.9-30

1204-A Configuration parameter

Items	Parameter
Engine Power	88.3KW/120HP
Driving Form	4-Wheel drive
Overall Dimensions (L*W*H)	4220×2060×2850mm(Top of safety frame)
Tread (Front / Rear Wheel)	1490,1630,1750,1850/1460-1740mm
Commonly Used Tread (Front / Rear Wheel)	1450/1430 mm
Wheelbase	2080 mm
Minimum Ground Clearance	385 mm(Bottom of front transaxle)
Minimum Service Quality	3860 kg
Minimum Service Mass Ratio	44.85 Kg/KW
Number of Gears	16/8
PTO Speed	760/850 r/min
Tyre type(Front/ Rear)	9.5-24/14.9-30



BenefitAll Supply Chain
(Shandong) Co., Ltd.

产品型号 : HC1404(G4)

Model : HC1404(G4)

心系三农

Care about Agriculture

保驾护航

Benefits Farmers





HC1404(G4) 配置参数 涵盖型号 HC1204(G4)

项目	单位	参数
发动机功率	kW	103 KW
驱动型式	/	四驱
整机外廓尺寸（长x宽x高）	mm	4510×2040×2870mm(至驾驶室顶)
整机轮距（前轮/后轮）	mm	1620、2020/1400-1800mm
整机常用轮距（前轮/后轮）	mm	1620/1500mm
整机轴距	mm	2165mm
最小离地间隙	mm	400mm（前驱动桥底部）
最小使用质量	kg	4560kg
最小使用比质量	kg/kW	44.27 Kg/KW
整机档位数	/	16/8
动力输出轴转速	r/min	760/850 r/min
轮胎型号（前/后）	/	12.4-24/16.9-34

HC1404(G4) Configuration parameter Covering models HC1204(G4)

Items	Parameter
Engine Power	103KW/140HP
Driving Form	4-Wheel drive
Overall Dimensions (L*W*H)	4510×2040×2870mm (Top of the cab)
Tread (Front / Rear Wheel)	1620, 2020/1400-1800 mm
Commonly Used Tread (Front / Rear Wheel)	1620/1500 mm
Wheelbase	2165 mm
Minimum Ground Clearance	400mm (Bottom of front transaxle)
Minimum Service Quality	4560 kg
Minimum Service Mass Ratio	44.27 Kg/KW
Number of Gears	16/8
PTO Speed	760/850 r/min
Tyre type(Front/ Rear)	12.4-24/16.9-34



BenefitAll Supply Chain
(Shandong) Co.,Ltd.

产品型号 : HC2004-A(G4)

Model : HC2004-A(G4)

澎湃动力

Surging Power

高效作业

Efficient Performance





HC2004-A(G4) 配置参数

涵盖型号 HC1804-A(G4)
HC1604-A(G4)

项目	单位	参数
发动机功率	kW	147
驱动型式	/	四驱
整机外廓尺寸 (长x宽x高)	mm	5150×2400×3100 (至驾驶室顶)
整机轮距 (前轮/后轮)	mm	1800、1930、2010/1730-1930
整机常用轮距 (前轮/后轮)	mm	1800/1900
整机轴距	mm	2600
最小离地间隙	mm	420 (油箱固定架底部)
最小使用质量	kg	6500
最小使用比质量	kg/kW	44.22
整机档位数	/	16/8
动力输出轴转速	r/min	760/850
轮胎型号 (前/后)	/	14.9-28/18.4-38

HC2004-A(G4) Configuration parameter

Covering models
HC1804-A(G4)
HC1604-A(G4)

Items	Parameter
Engine Power	147KW/200HP
Driving Form	4-Wheel drive
Overall Dimensions (L*W*H)	5150×2400×3100mm (Top of air filter)
Tread (Front / Rear Wheel)	1800, 1930, 2010/1730-1930 mm
Commonly Used Tread (Front / Rear Wheel)	1800/1900 mm
Wheelbase	2600 mm
Minimum Ground Clearance	420 mm
Minimum Service Quality	6500 kg
Minimum Service Mass Ratio	44.22 Kg/KW
Number of Gears	16/8
PTO Speed	760/850 r/min
Tyre type(Front/ Rear)	14.9-28/18.4-38



BenefitAll Supply Chain
(Shandong) Co., Ltd.

产品型号 : HC2604-A(G4)

Model : HC2604-A(G4)

澎湃动力

Surging Power

高效作业

Efficient Performance





HC2604-A(G4) 配置参数

项目	单位	参数
发动机功率	kW	191.2
驱动型式	/	四驱
整机外廓尺寸 (长x宽x高)	mm	5200x3600x3100 (至驾驶室顶)
整机轮距 (前轮 / 后轮)	mm	1970、2000/2250-2400
整机常用轮距 (前轮 / 后轮)	mm	1970/2400
整机轴距	mm	2850
最小离地间隙	mm	420 (后拖挂底)
最小使用质量	kg	8880
最小使用比质量	kg/kW	46.44
整机档位数	/	16/16
动力输出轴转速	r/min	760/850
轮胎型号 (前 / 后)	/	16.9-28/20.8-38

HC2604-A(G4) Configuration parameter

Items	Parameter
Engine Power	191.2KW/260HP
Driving Form	4-Wheel Drive
Overall Dimensions (L*W*H)	5200×3600×3100mm (To the top of the cab)
Tread (Front / Rear Wheel)	1970, 2000/2250-2400mm
Commonly Used Tread (Front / Rear Wheel)	1970/2400mm
Wheelbase	2850mm
Minimum Ground Clearance	420mm (Bottom of rear traction)
Minimum Service Quality	8880 kg
Minimum Service Mass Ratio	46.44 Kg/KW
Number of Gears	16/16
PTO Speed	760/850 r/min
Tyre type(Front/ Rear)	16.9-28/20.8-38



**BenefitAll Supply Chain
(Shandong) Co.,Ltd.**

BenefitAll Supply Chain Agricultural Equipment

Add.: Tianrun Plaza, No. 3758 Dongfeng East Street, High-Tech Zone, Weifang City, Shandong, China.

Website : www.benefitall.com.cn

Mobile/WeChat/Whatsapp: 0086-15866178351

Email: Benefitall@163.com