



Trade Price List

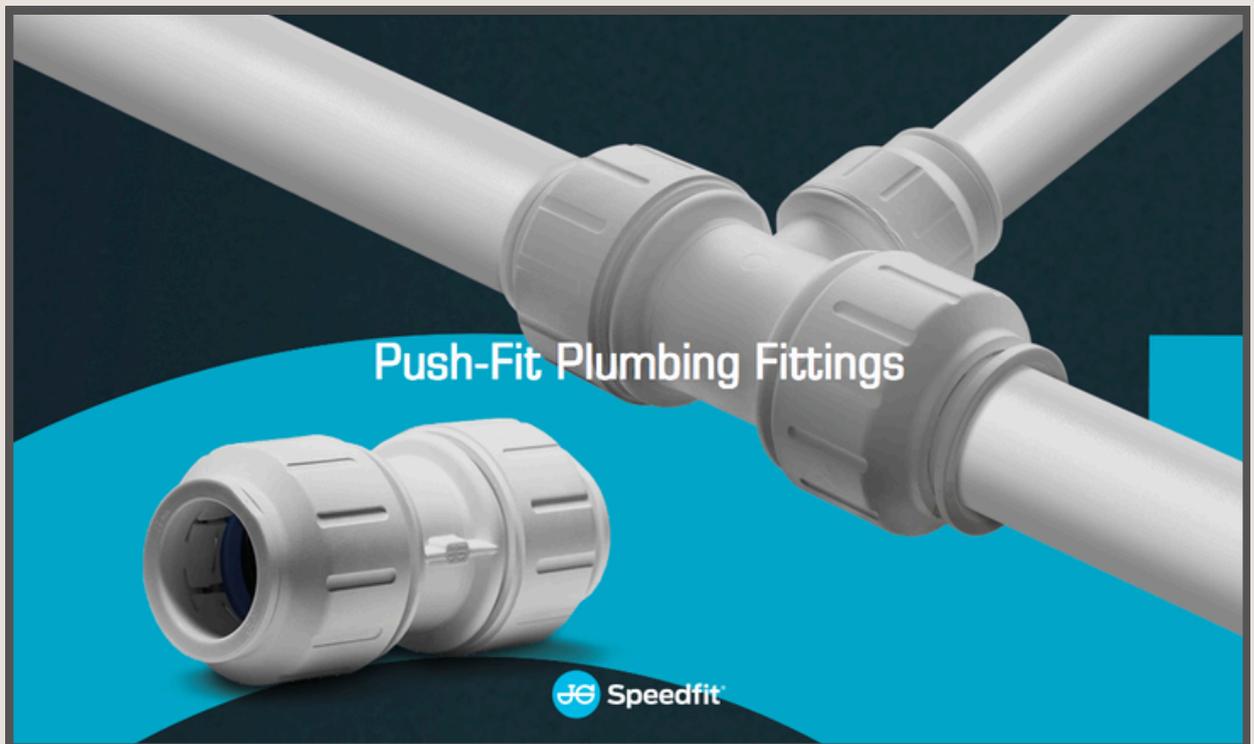

**PROUD DISTRIBUTORS OF THE SPEEDFIT PLUMBING SYSTEM
THE MARKET LEADING PLUMBING SOLUTION FOR MODERN BUILDINGS**



CASA FORTE



TABLE OF CONTENTS

Speedfit Product Range	04
How Speedfit Works	06
Trade Price List	08
Get In Touch	14



Speedfit Product Range



PEX Barrier Pipe

15 & 22mm Coils

Description

PEX barrier pipe for hot & cold water plumbing systems. This 5 layer pipe is supplied in flexible coils making it ideal for long pipe runs.



Couplers

15, 22 & 28mm

Description

White Push-Fit Plastic Twist & Lock Straight Connectors and 90 deg. Elbows. Available in a variety of equal and unequal size combinations.



Tees

15, 22 & 28mm

Description

White Push-Fit Plastic Twist & Lock Tee Connectors. Available in a variety of equal and unequal size combinations.



Rail Manifolds

22 x 15mm

Description

White Push-Fit Plastic Twist & Lock Multiport Tee/ Rail Manifold Connector. Available in a 2, 3 and 4-port combinations.



Tap Connectors

15mm x 1/2"

Description

White Push-Fit Plastic Twist & Lock Straight & Bent Tap Connectors. Available with a MBSP thread and washer for easy connection to taps & other fixtures/ appliances.



Service Valves

15 & 22mm

Description

White Push-Fit Plastic Service and Ball Valves for maintenance isolation of a fixture/ appliance. Also available in Chrome Metal variants.

Speedfit Product Range



Brass Couplers

15mmx1/2" & 22mmx3/4"

Description

Durable brass male and female couplers for connecting Metric to FBSP & MBSP type fittings.



Brass Manifolds

15mm x 3/4"

Description

Brass Nickel Plated push-fit manifold for central or zonal control of water distribution. Available in a 2, 3 and 4-port combinations.



Manifold Cabinets

310/460/610x310x90mm

Description

TERMOBOX White Plastic Universal Manifold Box complete with metal mounting rails & screw fixings Available in 3 sizes..



Flexi Hoses

15mmx1/2" & 3/4" and 22mmx3/4"

Description

Braided and White PVC Flexi Hoses for quickly and easily connecting appliance taps and fixtures. Our Push-fit connectors make it easy to install and dismount them in tight and awkward spaces



Stop Valves

15 & 22mm

Description

Speedfit Stop Valve to stop the flow of water to a fixture or zone in the event of an emergency or for repair work. Compact Push-Fit design is ideal for easy install in areas where space is tight.



Tools & Accessories

Description

A wide range of accessories for Speedfit plumbing installations, including pipe cutters, inserts, clips, collets, release aids, bending springs and much more.

HOW SPEEDFIT WORKS

Speedfit Fittings have a unique grip then seal construction made up of a collet with stainless steel teeth to grip the pipe and an 'O' ring to provide a permanent leak proof seal.


Use of the Superseal Pipe Insert ensures a double 'O' ring seal.

An 'O' ring at the head of the insert and the shape of the stem, provide a secondary seal against the bore of the fitting. A combination of this and the main 'O' ring ensure a good connection.


The stem of the insert gives greater rigidity of the length of pipe within the fitting, reducing the chance of leaks if a side load is applied.

The head of the insert has been designed for ease of insertion.

The additional benefit of Twist and Lock Fittings is that a twist of a screwcap locks the pipe in position and gives increased compression on the 'O' ring for even greater security.

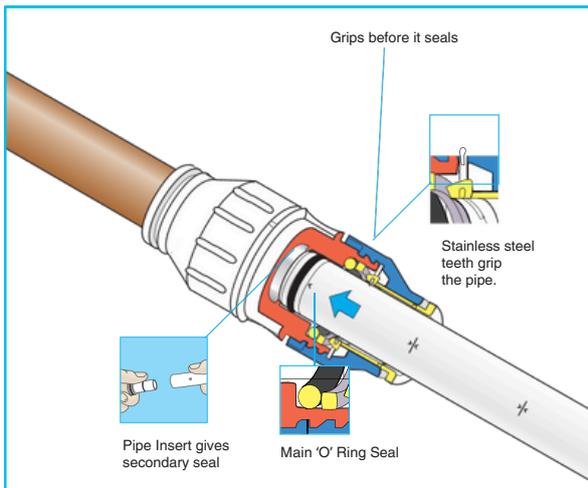

ADDED BENEFIT OF TWIST AND LOCK




Twist the screwcap until it touches the body flange. This locks the pipe into position and increases the 'O' ring seal around the pipe for greater security.

MAKING A GOOD CONNECTION

Fittings and pipe should be kept clean, bagged and undamaged before use.

PREPARE THE PIPE

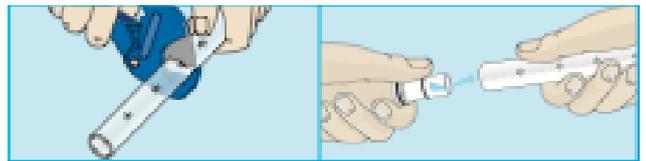


Ensure the pipe is free of score marks. Cut the pipe square. When using Speedfit Barrier Pipe cut along an insertion mark. We recommend the use of JG Pipe Cutters.


To prevent damage to the 'O' ring remove all burrs and sharp edges. When using Speedfit Pipe use a Superseal Pipe Insert. A twisting motion will aid insertion. The insert should only be used with Speedfit Pipe..

NEW TWIST & LOCK FITTINGS

The fitting should be in the 'unlocked' position, this is shown by a small gap between the screwcap and the body flange.

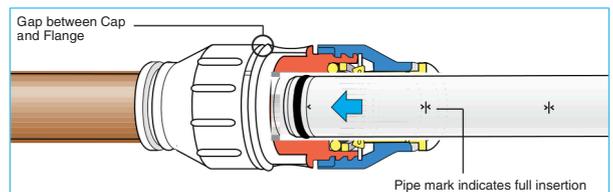



Push the pipe into the fitting, up to the pipe stop. If the Speedfit Pipe has been cut correctly the insertion mark on the pipe will be level with the collet head. The 'O' ring on the Superseal Pipe Insert provides a secondary seal against the bore of the fitting. **A good connection has been made.**



Pull to check it is secure. It is good practice to test the system prior to leaving the site or before use.

STANDARD FITTINGS

Standard Speedfit connections are made in the same way as Twist and Lock.

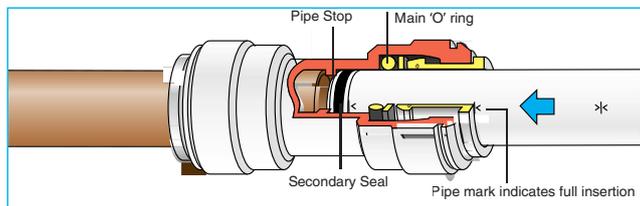


Pull to check the connection is secure. It is good practice to test the system prior to leaving the site or before use.

Our recommended test procedure is shown in our Technical Checklist.

TO DISCONNECT


Ensure the system is depressurised. The screwcap on Twist and Lock fitting will need to be turned back to the unlocked position.

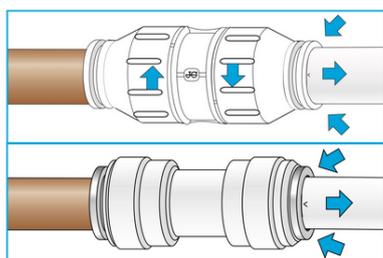


Push the collet square against the face of the fitting by using fingers or with the help of our collet release tool. With the collet held in this position the pipe can be removed.

The fitting can be used again without the need for replacement parts.


WHAT NOT TO DO



Don't use damaged or scored pipe.



Don't use hacksaws to cut the pipe or leave burrs on the end of the pipe.

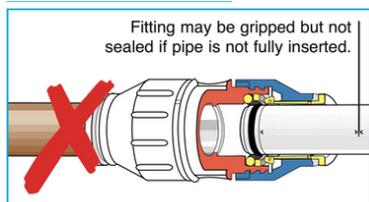


Don't forget to push the pipe fully into the fitting, past both the collet (gripper) and the 'O' ring.

PIPE STOP DISTANCES

Stops are located at the following distances from the end of the fitting:


Size	10mm	15mm	22mm	28mm
Distance	20mm	30mm	35mm	44mm

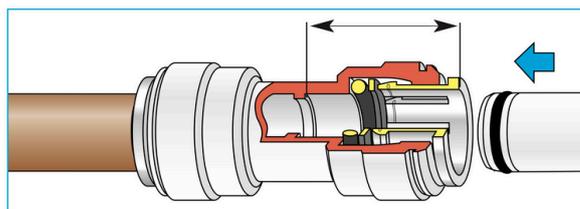

COLLET COVERS & COLLET CLIPS


Use a collet cover or collet clip to provide added security against pipe disconnection, e.g. the fitting coming into contact with rigid surfaces and behind dry-lining walls.

Collet covers for use with standard Speedfit fittings, are available in white, red or blue to allow colour coding of pipes.

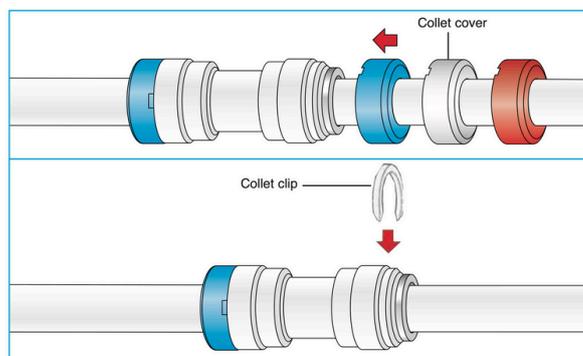

White or grey collet clips are used with standard fittings to prevent accidental pipe disconnection.

Red or Blue collet clips provide colour coding of pipe on Twist and Lock fittings. They are not designed to prevent accidental release and should be fitted when the fitting is in the locked position.

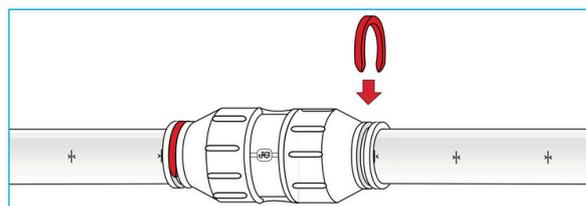

Do not insert fingers into the fitting as the stainless steel teeth may cause injury. Remember to pressure test the completed installation according to the recommendations in our Technical Checklist.

Trade Price List

S/N	PRODUCT NAME	PART NUMBER	UNIT PRICE (NGN)	PACK SIZE	IMAGE
SPEEDFIT PEX PIPES					
1	SPEEDFIT PEX PIPE COIL 15mm	15BPEX-50C	93,000	50m	
2	SPEEDFIT PEX PIPE COIL 22mm	22BPEX-50C	182,500	50m	
3	SPEEDFIT PEX STRAIGHT PIPE 28mm x 3m	28BPEX-10X3L	20,000	3m	
SPEEDFIT COUPLERS					
4	SPEEDFIT EQUAL STRAIGHT CONNECTOR 15mm	PEM0415W	1,880	1 no.	
5	SPEEDFIT EQUAL STRAIGHT CONNECTOR 22mm	PEM0422W	2,970	1 no.	
6	SPEEDFIT EQUAL STRAIGHT CONNECTOR 28mm	PEM0428W	9,965	1 no.	
7	SPEEDFIT REDUCING STRAIGHT COUPLER 22x15mm	PEM202215W	5,240	1 no.	
8	SPEEDFIT REDUCER 28x15mm	PEM062815W	7,775	1 no.	
9	SPEEDFIT REDUCER 28x22mm	PEM062822W	8,440	1 no.	
10	SPEEDFIT EQUAL ELBOW 15mm	PEM0315W	2,250	1 no.	
11	SPEEDFIT EQUAL ELBOW 22mm	PEM0322W	3,580	1 no.	
12	SPEEDFIT EQUAL ELBOW 28mm	PEM0328W	11,650	1 no.	
13	SPEEDFIT REDUCING ELBOW 22 x 15mm	PEM212215W	5,240	1 no.	
SPEEDFIT TEES					
14	SPEEDFIT EQUAL TEE 15mm	PEM0215W	3,240	1 no.	
15	SPEEDFIT EQUAL TEE 22mm	PEM0222W	4,800	1 no.	
16	SPEEDFIT EQUAL TEE 28mm	PEM0228W	16,475	1 no.	
17	SPEEDFIT REDUCING TEE 22 - 15 - 22mm	PEM3022DW	5,400	1 no.	
18	SPEEDFIT REDUCING TEE 22 - 15 - 15mm	PEM3022BW	5,400	1 no.	
19	SPEEDFIT REDUCING TEE 15 - 15 - 22mm	PEM3022CW	5,400	1 no.	
20	SPEEDFIT REDUCING TEE 22 - 22 - 15mm	PEM3022AW	5,400	1 no.	
21	SPEEDFIT REDUCING TEE 28 - 22 - 22mm	PEM3028BW	18,000	1 no.	
22	SPEEDFIT REDUCING TEE 28 - 28 - 22mm	PEM3028AW	18,000	1 no.	
23	SPEEDFIT REDUCING TEE 28 - 28 - 15mm	PEM302815AW	18,000	1 no.	
24	SPEEDFIT 2-WAY DIVIDER 15mm	CM2315W	7,100	1 no.	
SPEEDFIT MULTIPOINT TEES					
25	SPEEDFIT 2-PORT RAIL MANIFOLD 22mm	PEM582215CW	13,875	1 no.	
26	SPEEDFIT 3-PORT RAIL MANIFOLD 22mm	PEM582215CW	13,875	1 no.	
27	SPEEDFIT 4-PORT RAIL MANIFOLD 22mm	PEM582215CW	13,875	1 no.	



CASA FORTE



Trade Price List

S/N	PRODUCT NAME	PART NUMBER	UNIT PRICE (NGN)	PACK SIZE	IMAGE
SPEEDFIT CONNECTORS					
28	SPEEDFIT BENT TAP CONNECTOR 15mm	PEMBTC1514	6,200	1 no.	
29	SPEEDFIT STRAIGHT TAP CONNECTOR 15mm	PEMSTC1514	4,900	1 no.	
30	SPEEDFIT BRASS MALE COUPLER 15mm	15MC(1/2)	9,500	1 no.	
31	SPEEDFIT BRASS MALE COUPLER 22mm	22MC(3/4)	15,500	1 no.	
32	SPEEDFIT BRASS MALE COUPLER 15mm	MW011504N	9,500	1 no.	
33	SPEEDFIT BRASS MALE COUPLER 22mm	MW012206N	16,000	1 no.	
34	SPEEDFIT PLASTIC BULKHEAD ELBOW 15mm	CM551516W	7,725	1 no.	
35	SPEEDFIT BRASS FEMALE COUPLER 15mm	MW451514N	11,600	1 no.	
36	SPEEDFIT BRASS FEMALE COUPLER 22mm	MW452216N	17,000	1 no.	
37	SPEEDFIT CONVERSION CONNECTOR 15mm	NC471	2,800	1 no.	
38	SPEEDFIT CONVERSION CONNECTOR 22mm	NC2324	4,500	1 no.	
39	SPEEDFIT STOP END 15mm	PSE4615W	2,500	1 no.	
40	SPEEDFIT STOP END 22mm	PSE4622W	3,000	1 no.	
41	SPEEDFIT STOP END 28mm	PSE4628W	6,300	1 no.	
42	SPEEDFIT TANK CONNECTOR 15mm	CM0715S	4,200	1 no.	
43	SPEEDFIT TANK CONNECTOR 22mm	CM0722S	5,400	1 no.	
44	SPEEDFIT TANK CONNECTOR 28mm	CM0728S	20,700	1 no.	
SPEEDFIT SERVICE VALVES					
45	SPEEDFIT PLASTIC BALL VALVE 15mm	15SV-H	13,000	1 no.	
46	SPEEDFIT PLASTIC BALL VALVE 22mm	22SV-H	18,500	1 no.	
47	SPEEDFIT CHROME BALL VALVE 15mm	15SV-H	13,000	1 no.	
48	SPEEDFIT CHROME BALL VALVE 22mm	22SV-H	18,500	1 no.	
SPEEDFIT PIPE INSERTS & RELEASE AIDS					
49	SPEEDFIT PIPE INSERT 15mm	TSM15N	365	10 no.	
50	SPEEDFIT PIPE INSERT 22mm	TSM22N	445	10 no.	
51	SPEEDFIT SUPERSEAL INSERT 15mm	STS15	395	10 no.	
52	SPEEDFIT SUPERSEAL INSERT 22mm	STS22	500	10 no.	
53	SPEEDFIT SUPERSEAL INSERT 28mm	STS28	1,100	10 no.	
54	SPEEDFIT RELEASE AID 15mm	15RA	400	5 no.	
55	SPEEDFIT RELEASE AID 22mm	22RA	650	5 no.	
56	SPEEDFIT RELEASE AID 28mm	28RA	1,200	2 no.	




CASAFORTE



Trade Price List

S/N	PRODUCT NAME	PART NUMBER	UNIT PRICE (NGN)	PACK SIZE	IMAGE
SPEEDFIT MANIFOLDS					
57	2 PORT SPEEDFIT DZR BRASS VALVE MANIFOLD 15mm x 3/4"	JGMAN2	70,000	1 no.	
58	3 PORT SPEEDFIT DZR BRASS VALVE MANIFOLD 15mm x 3/4"	JGMAN3	90,000	1 no.	
59	4 PORT SPEEDFIT DZR BRASS VALVE MANIFOLD 15mm x 3/4"	JGMAN4	120,000	1 no.	
MANIFOLD CABINETS					
60	TERMOBOX - WHITE PLASTIC UNIVERSAL MANIFOLD BOX (310 x 310 x 90mm)	01302092	40,000	1 no.	
61	TERMOBOX - WHITE PLASTIC UNIVERSAL MANIFOLD BOX (460 x 310 x 90mm)	01302102	52,500	1 no.	
62	TERMOBOX - WHITE PLASTIC UNIVERSAL MANIFOLD BOX (610 x 310 x 90mm)	01302112	67,500	1 no.	
SPEEDFIT FLEXI HOSES					
63	FLEXI HOSE - SPEEDFIT X HAND TIGHTEN - 15mmx1/2" (300mm)	PFLX15	5,100	1 no.	
64	FLEXI HOSE - SPEEDFIT X HAND TIGHTEN - 15mmx3/4" (300mm)	PFLX16	6,600	1 no.	
65	FLEXI HOSE - SPEEDFIT X HAND TIGHTEN - 22mmx3/4" (300mm)	PFLX22	7,100	1 no.	
66	FLEXI HOSE - SPEEDFIT X HAND TIGHTEN - 15mmx1/2" (500mm)	PFLX18	7,400	1 no.	
67	FLEXI HOSE - SPEEDFIT MONOBLOC MIXER 15mm/M10	WFLX28	11,500	1 no.	
68	FLEXI HOSE - SPEEDFIT MONOBLOC MIXER 15mm/M12	WFLX29	11,500	1 no.	
SPEEDFIT STOP VALVES					
69	SPEEDFIT STOP VALVE 15mm	15STV	12,000	114g	
70	SPEEDFIT STOP VALVE 22mm	22STV	18,000	198g	
SPEEDFIT TOOLS & ACCESSORIES					
71	LIGHT DUTY PIPE CUTTER	JG-TS	32,000	180g	
72	HEAVY DUTY PIPE CUTTER	JGHDC	65,000	560g	
73	BLADE FOR HEAVY DUTY PIPE CUTTER	BLADE-JGHDC	3,600	36g	
74	PIPE BENDING SPRING 15mm	JG-BS15	5,000	386g	
75	PIPE BENDING SPRING 22mm	JG-BS22	6,000	653g	



CASAFORTE





CASAFORTE

BUILDING ENTERPRISES



GET IN TOUCH



+234-809 845 5525
+234-811 146 0581 (WhatsApp Only)



sales@casaforte-ng.com
casaforte.sales@gmail.com



www.casaforte-ng.com



Sonotina House
17 Olujobi Street
Gbagada Phase 1
Lagos State - Nigeria

