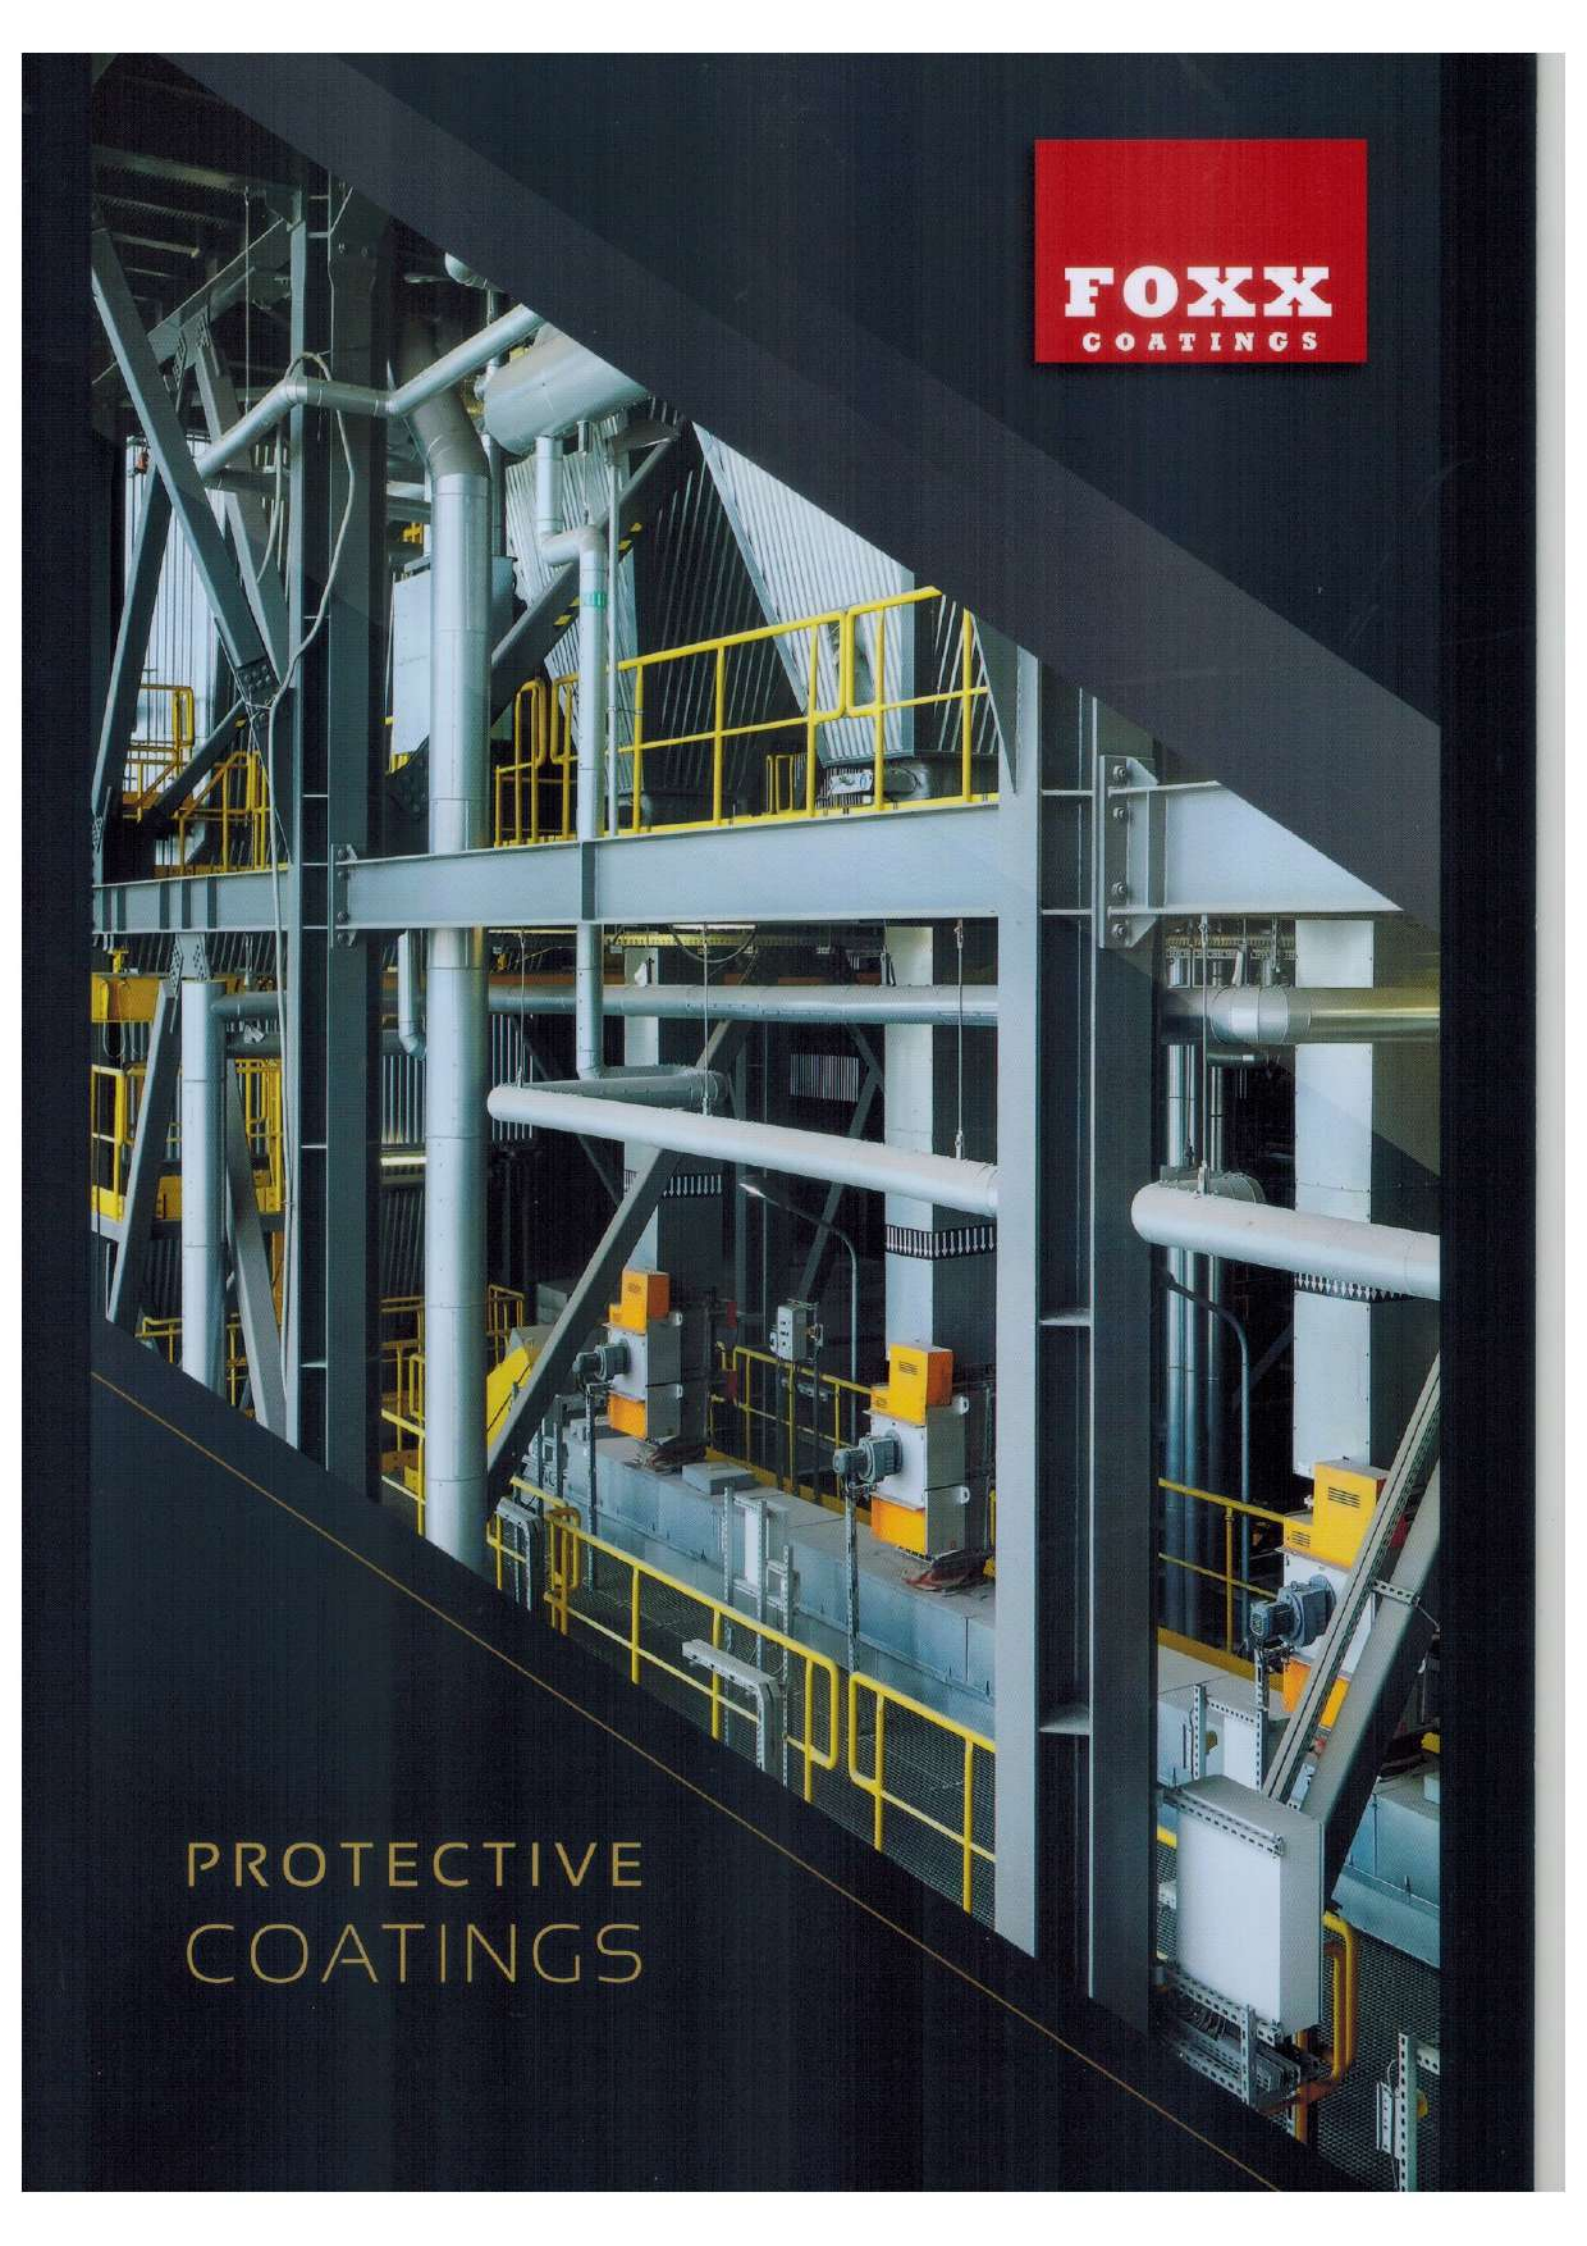


A photograph of a large industrial facility, possibly a refinery or chemical plant, featuring a complex network of grey pipes, steel structural beams, and yellow safety railings. The scene is viewed from a low angle, looking up at the multi-level structure. The lighting is somewhat dim, with highlights on the pipes and railings.

FOXX
COATINGS

PROTECTIVE
COATINGS

SPECIAL ACRYLIC FINISH | CAT KHAS AKRILIK | 特殊丙烯酸面漆

NEXT-KOTE 318 FAST DRY ACRYLIC FINISH A fast drying topcoat finish for special effects. Fastprime 890 white is required as base for a full effect finish.

NEXT-KOTE 318 CAT AKRILIK CEPAT KERING Cat akrilik khas cepat kering memerlukan Fastprime 890 putih sebagai asas di bawah untuk kesan yang istimewa dan cantik.

NEXT-KOTE 318 快干丙烯酸面漆一种用于特殊效果的快干型面漆。为达到完整效果，需要使用 Fast Prime 890 白色作为底漆。



Fluorescent Orange 7888	Fluorescent Red 4488	Fluorescent Pink 4888
Fluorescent Green 3888	Fluorescent Yellow 6888	Sparkle Gold 9907

ACRYLIC GLOSS FINISH | CAT KILAT AKRILIK | 丙烯酸光面漆

NEXT-KOTE 313 FAST DRY ACRYLIC GLOSS FINISH A fast drying acrylic gloss finish with durability against exterior weathering. For a harder finish, add up to 20% acrylic hardener.

NEXT-KOTE 313 CAT KILAT AKRILIK CEPAT KERING Cat kilat cepat kering yang tahan cuaca luar. Untuk kemasan yang lagi tahan, tambah sehingga 20% pengeras akrilik.

NEXT-KOTE 313 快干丙烯酸光面漆一种快干的丙烯酸光面漆，具有优异的耐用性，可抵抗外部天气。为获得更硬的表面效果，可添加最多 20% 的丙烯酸硬化剂。

POLYURETHANE GLOSS FINISH | CAT KILAT POLIURETHAN | 聚氨酯光面漆

PROC 420 POLYURETHANE 2:1 GLOSS FINISH A two pack acrylic PU gloss finish to be used on exterior and interior surfaces. It is a high performance finish that has excellent resistance to scratch and abrasion.

PROC 420 POLIURETHAN 2:1 Cat kilat akrilik PU dua pek untuk permukaan luar dan dalam. Ini adalah cat unggul yang tahan gisiran.

PROC 420 2:1 聚氨酯光面漆双组分丙烯酸聚氨酯光面漆，可用于外部和内部表面。高性能面漆，具有出色的耐刮擦和耐磨性能。



Buttermilk B54-052 2952	Yellow P108C 6108	Telegrey RAL7047 0047	Azzurro 1686	Cool Green 3433
Yellow P144C 6144	Shape Yellow 8600 6600	Basalt Grey RAL7012 0012	Sky Blue RAL5015 1015	Safety Green 9700 3700
Orange P021C 7021	Red P032C 4241	Nut Brown RAL8011 2011	Safety Blue 9800 1800	Green P361C 3361
Safety Orange 9200 7200	Traffic Red RAL3020 4420	Choco Brown RAL8017 2017	Ultra M Blue RAL5002 1002	Aluminium 1000
Vermillion RAL2002 7120	Signal Red 7522 4522	Semi Glossy Black 0178	Semi Glossy White 5201	

ACRYLIC & POLYURETHANE PRIMER | CAT ASAS AKRILIK & POLIURETHAN | 丙烯酸和聚氨酯底漆

NEXT-KOTE 890 FASTPRIME A fast drying primer with good build over metal, masonry and wood. For a harder finish, add up to 25% acrylic hardener.

NEXT-KOTE 890 CAT ASAS CEPAT KERING Cat asas cepat kering untuk besi, konkrit dan kayu. Untuk cat asas yang lebih keras, tambah sehingga 25% pengeras akrilik.

NEXT-KOTE 890 快速底漆一种快速干燥的底漆，适用于金属、砖石和木材。可加 25% 丙烯酸硬化剂以增强硬度。

Fastprime Grey PR890GY	Fastprime White PR890WH	Fastprime Black PR890BK

PROC 233 PRIMECOAT 4:1 PRIMER A two pack high build primer that gives excellent performance as a spray filler. It has good corrosion resistance and can be applied directly to bare metal and steel.

PROC 233 CAT ASAS PRIMECOAT 4:1 Cat asas akrilik dua pek yang memberi daya pengisian melalui penyemburan. Cat asas ini memberi daya tahanan yang bagus dan boleh disemur diatas keluli dan besi.

PROC 233 底漆 4:1 双组分高厚度底漆，具优异喷涂填料性能和良好防腐性，可用于裸金属和钢材表面。

Primecoat Grey PR233GY	Primecoat White PR233WH	Primecoat Black PR233BK

ACRYLIC FLOOR FINISH | CAT LANTAI AKRILIK | 丙烯酸地板面漆

PROC 328 ACRYLIC 4:1 FLOOR FINISH A fast drying durable concrete floor finish which can withstand external weathering. For a harder finish, add up to 25% acrylic hardener.

PROC 328 CAT LANTAI AKRILIK 4:1 Cat lantai konkrit cepat kering yang tahan cuaca luar. Untuk kemasan yang lebih tahan, tambah sehingga 25% pengeras akrilik.

PROC 328 丙烯酸 4:1 地板面漆 一种快速干燥且耐用的混凝土地板面漆可抵抗外部气候。可加最多 25% 的丙烯酸硬化剂以增强硬度。



Morning Dew 3223



Ivory BS4-052 2052



Elite Blue 1463



Misty Grey 1457 0457



Evergreen 3461



Yellow 6668



Signal Red 4437



Exec Grey 0104



Dark Green 3458



Mayellow 6344



Pavement 4777



Dark Grey 0174



Greenlane 3728



Ropewalk 2337



ADHESION PRIMER 1-PACK | CAT ASAS PELEKAT 1-PEK | 粘附力底漆 单套

PROC 483 ADHESION PRIMER A fast drying single pack epoxy based primer to enhance adhesion.

PROC 483 CAT ASAS PELEKAT Cat cepat kering dengan daya melekat yang bagus atas permukaan konkrit.

PROC 483 附着力底漆 一种快速干燥的单组分环氧底漆，用于增强附着力。

PROC 383 GLASS MULTIPRIME A slightly transparent primer to enhance adhesion between glass and finish coat.

PROC 383 CAT ASAS GLAS MULTIPRIME Cat asas jernih untuk permukaan gelas bagi memberi daya pelekak antara gelas dan cat.

PROC 383 玻璃多功能底漆 一种略带透明的底漆，用于增强玻璃与面漆之间的附着力。



Adhesion Primer EC1636



Glass Multiprime PR383MB

PROC 383 ETCHPRIME A single pack etch primer for excellent adhesion to bare metal, galvanised steel, aluminium and fibre glass.

PROC 383 CAT ASAS ETCHPRIME Cat asas punaran dengan daya pelekak yang bagus atas permukaan besi, keluli dan gelas fiber.

PROC 383 蚀刻底漆 一种单组分蚀刻底漆，提供优异的附着力，适用于裸金属和镀锌钢材。



Etchprime Grey PR383GY



Etchprime Green PR383GN



Etchprime White PR383WH



ALKYD ZINC ROOF PAINT | CAT ALKID BUMBUNG ZINK | 醇酸锌屋顶漆

PROC 355SG GREY GREEN ZROOF PAINT A slow dry paint to protect zinc roofing.

PROC 355 CAT ZROOF HIJAU KELABU Cat lambat kering untuk melindungi bumbung zink.

PROC 355SG 灰绿色锌屋顶漆 一种慢干漆，用于保护锌屋顶。



Grey Green Zroof PR355SG

MIO MICACEOUS IRON OXIDE | MIO OKSIDA BESI MICACEOUS | 云母氧化铁

PROC 353 MIO MICACEOUS IRON OXIDE A protective finish with a coarse surface for anti-slip and with good corrosion resistance on iron and steel.

PROC 353 MIO CAT OKSIDA MICACEOUS Cat kemasan pertindungan yang kasar bagi mengelakkan kelicinan serta melindungi besi dan keluli dari kakisan.

PROC 353 MIO 云母铁红 一种具有粗糙表面的保护性涂层，具有防滑功能，并对铁和钢材具有良好的防腐性能。

Note : Surface is coarse for anti-slip. | Permukaan adalah kasar untuk mengelakkan kelicinan. | 表面粗糙，防滑。



Silver Grey 9804



Dark Grey 9803



ROAD MARKING PAINTS | CAT GARIS JALAN | 道路标线漆

PROC 366 ROAD MARKING PAINTS An air drying topcoat used for road marking.

PROC 366 CAT GARIS JALAN Cat kemas untuk garis jalan.

PROC 366 道路标线漆 风干面漆，用于道路标线。




Roadline Yellow **RL6222**



Roadline Red **RL4613**



Roadline White **RL5201**



Roadline Black **RL0285**

ALKYD SLOW DRY PRIMER | CAT ASAS LAMBAT KERING | 醇酸慢干底漆

PROC ZP3 ZINC PHOSPHATE PRIMER A protecting primer with good corrosion properties for use on steel substrates and bare metal.

PROC ZP3 CAT ASAS ZINK FOSFAT Cat asas yang memberi daya perlindungan dari kakisan atas permukaan besi.

PROC ZP3 特磷酸盐底漆 具有良好防腐性能，适用于钢材和裸金属。



ZP3 Fine Grey **PRZP3FG**



ZP3 Green **PRZP3GN**



PROC 355 GREY GREEN PRIMER A slow dry protecting primer with good corrosion properties over steel and ferrous metal.

PROC 355 CAT ASAS HIJAU KELABU Cat asas lambat kering untuk melindungi ketuli dan besi dari kakisan.

PROC 355 灰绿色底漆 慢干保护底漆，具有良好防腐性能，适用于钢铁和铁质金属。



Grey Green Primer **PR355**

PROC 2119 OIL BROWN PRIMER A protecting primer with good corrosion properties for use on ferrous metal.

PROC 2119 CAT ASAS MINYAK PERANG Cat asas untuk melindungi besi dari kakisan.

PROC 2119 油棕色底漆 具有良好防腐性能的保护底漆，适用于铁质金属。



Oil Brown Primer **PR2119**

HARPER 9 5001 UNDERCOAT An air drying undercoat over wood before overcoating with alkyd topcoat.

HARPER 9 5001 CAT ASAS Cat asas atas kayu sebelum sapu cat.

HARPER 9 5001 底漆 在木材表面涂刷风干底漆后，再涂覆醇酸面漆。



Undercoat **BU5001**

HARPER 9 4076 RED OXIDE PRIMER A protecting primer to prevent corrosion on ferrous metal.

HARPER 9 4076 CAT ASAS OKSIDA MERAH Cat asas untuk melindungi besi dari kakisan.

HARPER 9 4076 红铁矿底漆 一种保护性底漆，用于防止铁质金属腐蚀。



Red Oxide Primer **PR4076**

NEXT 398 5009 UNDERCOAT An air drying undercoat over wood before overcoating with alkyd topcoat.

NEXT 398 5009 CAT ASAS Cat asas atas kayu sebelum sapu cat.

NEXT 398 5009 底漆 一种风干底漆，适用于木材，涂覆后可再上醇酸面漆。



Undercoat **BU5009**

NEXT 398 4750 RED OXIDE PAINT A protecting primer to prevent corrosion on ferrous metal.

NEXT 398 4750 CAT OKSIDA MERAH Cat asas untuk melindungi besi dari kakisan.

NEXT 398 4750 红铁矿漆 一种保护性底漆，用于防止铁质金属腐蚀。



Red Oxide **PR4750**

ANTI-FOULING PAINTS | CAT ANTI-KOTORAN | 防污漆

PROC 516 ANTI-FOULING GRADE 14 A premium grade air drying compound for painting of under hull to inhibit growth of barnacles. It has excellent build and adhesion.

PROC 516 ANTI-FOULING GRED 14 Cat sebatian kering udara gred premium untuk mengecat bahagian bawah perahu. Ia mempunyai ketebalan dan lekatan yang sangat baik.

PROC 516 14 级防污漆 一种优质风干涂料，用于船体底部，抑制藤壶等海洋生物的生长。



Premium G14 **AF014**

PROC 516 ANTI-FOULING GRADE 2-51 A standard grade air drying compound for painting of under hull to inhibit growth of barnacles. It has excellent build and adhesion.

PROC 516 ANTI-FOULING GRED 2-51 Cat sebatian kering udara gred standard untuk mengecat bahagian bawah perahu. Ia mempunyai ketebalan dan lekatan yang sangat baik.

PROC 516 2-51 级防污漆 一种标准级风干涂料，用于船体底部，抑制海洋生物附着。



Standard G2-51 **AF02-51**

PRODUCT INFORMATION SHEET		APPLICATION APLIKASI 应用			DRYING TIME MASA KERING 干燥		
PRODUCT PRODUK 产品	SURFACE TYPE JENIS PERMUKAAN 表面						
 PROC 366 ROAD MARKING PAINTS	• Masonry • Road • Wood • Ferrous Metal	  	  	  	4 hrs	8 hrs	12 hrs Into Service
 PROC ZP3 ZINC PHOSPHATE PRIMER	• Wood • Ferrous Metal	  	  	  	4 hrs	16 hrs	16 hrs Recoatable
 PROC 355 GREY GREEN PRIMER	• Wood • Ferrous Metal	  	  	  	4 hrs	16 hrs	16 hrs Recoatable
 PROC 2119 OIL BROWN PRIMER	• Wood • Ferrous Metal	  	  	  	4 hrs	16 hrs	16 hrs Recoatable
 HARPER 9 5001 UNDERCOAT	• Wood • Ferrous Metal	  	  	  	4 hrs	12 hrs	12 hrs Recoatable
 HARPER 9 4076 RED OXIDE FINISH	• Wood • Ferrous Metal	  	  	  	4 hrs	16 hrs	16 hrs Recoatable
 NEXT 398 5009 UNDERCOAT	• Wood • Ferrous Metal	  	  	  	4 hrs	12 hrs	12 hrs Recoatable
 NEXT 398 4750 RED OXIDE PAINT	• Wood • Ferrous Metal	  	  	  	4 hrs	16 hrs	16 hrs Recoatable
 PROC 516 ANTI-FOULING GRADE 14	• Wood • Ferrous Metal	  	  	  	4 hrs	24 hrs	24 hrs Into Service
 PROC 516 ANTI-FOULING GRADE 2-51	• Wood • Ferrous Metal	  	  	  	4 hrs	24 hrs	24 hrs Into Service

PAINTS NETWORK SDN BHD (55292-M)

14, Jln TPP1/11, Tmn Perindustrian Puchong, 47160 Puchong, Selangor Darul-Ehsan, Malaysia.

Tel : 03-8061 1878 Fax : 03-8061 1978

Email : paintsnetwork@gmail.com

PRODUCT INFORMATION SHEET		APPLICATION APLIKASI 应用			DRYING TIME MASA KERING 干燥		
PRODUCT PRODUK 产品	SURFACE TYPE JENIS PERMUKAAN 表面						
 NEXT-KOTE 318 FAST DRY ACRYLIC SPECIAL FINISH	• Ferrous Metal • Wood • Masonry				1 hr	4 hrs	8 hrs Into Service
 NEXT-KOTE 313 FAST DRY ACRYLIC GLOSS FINISH	• Ferrous Metal • Wood • Masonry				1 hr	1 hr	8 hrs Into Service
 +  PROC 420 POLYURETHANE 2:1 FINISH	• Ferrous Metal • Wood • Masonry				4 hrs	16 hrs	24 hrs Into Service
 NEXT KOTE 890 FASTPRIME	• Ferrous Metal • Wood • Masonry				1 hr	4 hrs	8 hrs Recoatible
 +  PROC 233 PRIMECOAT 4:1 PRIMER	• Ferrous Metal • Wood • Masonry				4 hrs	12 hrs	24 hrs Recoatible
 +  PROC 328 ACRYLIC 4:1 FLOOR FINISH	• Masonry • Metal Deck				1 hr	4 hrs	8 hrs Into Service
 PROC 483 ADHESION PRIMER	• Masonry • Ferrous Metal				1/2 hr	2 hrs	2 hrs Recoatible
 PROC 383 GLASS MULTIPRIME	• Glass				1/2 hr	2 hrs	2 hrs Recoatible
 PROC 383 ETCHPRIME	• Aluminium • Fibre Glass • Ferrous Metal				1/2 hr	2 hrs	2 hrs Recoatible
 PROC 355S6 GREY GREEN ZROOF PAINT	• Zinc Roof • Wood • Ferrous Metal				4 hrs	12 hrs	12 hrs Into Service
 PROC 353 MIO MICACEOUS IRON OXIDE	• Metal Deck • Ferrous Metal • Wood				4 hrs	12 hrs	12 hrs Into Service