



Reducción Excéntrica BPE, extremos Soldables AWF

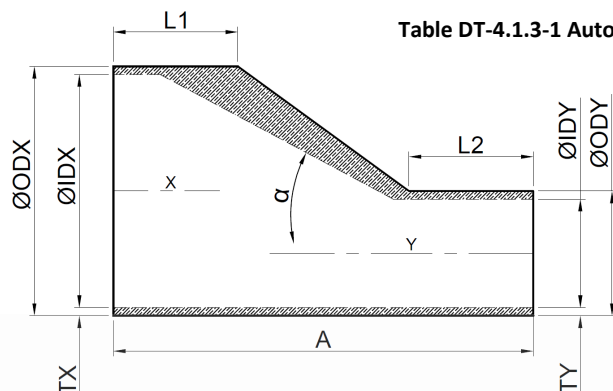


Table DT-4.1.3-1 Automatic Tube Weld: Eccentric Reducer

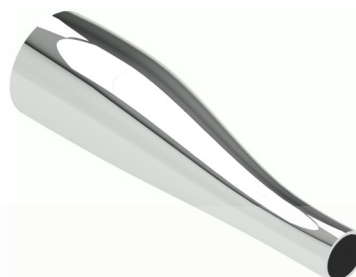


Table DT-4.1.3-1 Automatic Tube Weld: Eccentric Reducer

SIZE		ØODX	ØIDX	TX	A	L1	L2	α	ØODY	ØIDY	TY	# Part. Ac. Inox. 316L
X	Y											
3/4"	1/2"	0.750" 19.05 mm	0.620" 15.75 mm	0.065" 1.65 mm	2.125" 53.98 mm	1.000" 25.4 mm	1.000" 25.4 mm	30	0.500" 12.7 mm	0.370" 9.4 mm	0.065" 1.65 mm	JB 32W 316L 2015
1"	1/2"	1.000" 25.4 mm	0.870" 22.1 mm	0.065" 1.65 mm	3.000" 76.2 mm	1.000" 25.4 mm	1.000" 25.4 mm	30	0.500" 12.7 mm	0.370" 9.4 mm	0.065" 1.65 mm	JB 32W 316L 2515
1"	3/4"	1.000" 25.4 mm	0.870" 22.1 mm	0.065" 1.65 mm	2.500" 63.5 mm	1.000" 25.4 mm	1.000" 25.4 mm	30	0.750" 19.05 mm	0.620" 15.75 mm	0.065" 1.65 mm	JB 32W 316L 2520
1-1/2"	1/2"	1.500" 38.1 mm	1.370" 34.8 mm	0.065" 1.65 mm	2.125" 53.98 mm	1.000" 25.4 mm	1.000" 25.4 mm	30	0.500" 12.7 mm	0.370" 9.4 mm	0.065" 1.65 mm	JB 32W 316L 4015
1-1/2"	3/4"	1.500" 38.1 mm	1.370" 34.8 mm	0.065" 1.65 mm	3.000" 76.2 mm	1.000" 25.4 mm	1.000" 25.4 mm	30	0.750" 19.05 mm	0.620" 15.75 mm	0.065" 1.65 mm	JB 32W 316L 4020
1-1/2"	1"	1.500" 38.1 mm	1.370" 34.8 mm	0.065" 1.65 mm	2.500" 63.5 mm	1.000" 25.4 mm	1.000" 25.4 mm	30	1.000" 25.4 mm	0.870" 22.1 mm	0.065" 1.65 mm	JB 32W 316L 4025
2"	1"	2.000" 50.8 mm	1.870" 47.5 mm	0.065" 1.65 mm	3.375" 85.73 mm	1.000" 25.4 mm	1.000" 25.4 mm	30	1.000" 25.4 mm	0.870" 22.1 mm	0.065" 1.65 mm	JB 32W 316L 5025
2"	1-1/2"	2.000" 50.8 mm	1.870" 47.5 mm	0.065" 1.65 mm	2.500" 63.5 mm	1.000" 25.4 mm	1.000" 25.4 mm	30	1.500" 38.1 mm	1.370" 34.8 mm	0.065" 1.65 mm	JB 32W 316L 5040
2-1/2"	1-1/2"	2.500" 63.5 mm	2.370" 60.2 mm	0.065" 1.65 mm	3.375" 85.73 mm	1.000" 25.4 mm	1.000" 25.4 mm	30	1.500" 38.1 mm	1.370" 34.8 mm	0.065" 1.65 mm	JB 32W 316L 6540
2-1/2"	2"	2.500" 63.5 mm	2.370" 60.2 mm	0.065" 1.65 mm	2.500" 63.5 mm	1.000" 25.4 mm	1.000" 25.4 mm	30	2.000" 50.8 mm	1.870" 47.5 mm	0.065" 1.65 mm	JB 32W 316L 6550
3"	1-1/2"	3.000" 76.2 mm	2.870" 72.9 mm	0.065" 1.65 mm	4.250" 107.95mm	1.500" 38.1 mm	1.000" 25.4 mm	30	1.500" 38.1 mm	1.370" 34.8 mm	0.065" 1.65 mm	JB 32W 316L 8040
3"	2"	3.000" 76.2 mm	2.870" 72.9 mm	0.065" 1.65 mm	3.375" 85.73 mm	1.500" 38.1 mm	1.000" 25.4 mm	30	2.000" 50.8 mm	1.870" 47.5 mm	0.065" 1.65 mm	JB 32W 316L 8050
3"	2-1/2"	3.000" 76.2 mm	2.870" 72.9 mm	0.065" 1.65 mm	2.625" 66.68 mm	1.500" 38.1 mm	1.000" 25.4 mm	30	2.500" 63.5 mm	2.370" 60.2 mm	0.065" 1.65 mm	JB 32W 316L 8065
4"	2"	4.000" 76.2 mm	3.834" 97.38 mm	0.083" 2.11 mm	5.125" 130.18mm	1.500" 38.1 mm	1.000" 25.4 mm	30	2.000" 50.8 mm	1.870" 47.5 mm	0.065" 1.65 mm	JB 32W 316L 10050
4"	2-1/2"	4.000" 76.2 mm	3.834" 97.38 mm	0.083" 2.11 mm	4.250" 107.95mm	1.500" 38.1 mm	1.000" 25.4 mm	30	2.500" 63.5 mm	2.370" 60.2 mm	0.065" 1.65 mm	JB 32W 316L 10065
4"	3"	4.000" 76.2 mm	3.834" 97.38 mm	0.083" 2.11 mm	3.875" 98.43 mm	1.500" 38.1 mm	1.500" 38.1 mm	30	3.000" 76.2 mm	2.870" 72.9 mm	0.065" 1.65 mm	JB 32W 316L 10080
6"	3"	6.000" 152.4 mm	5.782" 146.86mm	0.109" 2.77 mm	7.250" 184.15mm	2.000" 50.8 mm	1.500" 38.1 mm	44	3.000" 76.2 mm	2.870" 72.9 mm	0.065" 1.65 mm	JB 32W 316L 15080
6"	4"	6.000" 152.4 mm	5.782" 146.86mm	0.109" 2.77 mm	5.625" 142.88mm	2.000" 50.8 mm	1.500" 38.1 mm	44	4.000" 76.2 mm	3.834" 97.38 mm	0.083" 2.11 mm	JB 32W 316L 150100

