


Luxury Vinyl Tile





Exotics

Explore the American Chic's cutting edge Luxury Vinyl Tile, Collection Exotics offers you broad range of different natural wood designs with advanced printing and texturing technologies. Feathered a 22 mil(0.55mm) commercial wear layer with Enhanced Urethane Coating, heavy commercial quality and easy maintenance. The commercial backing layer provides the tile for outstanding dimensional stability.

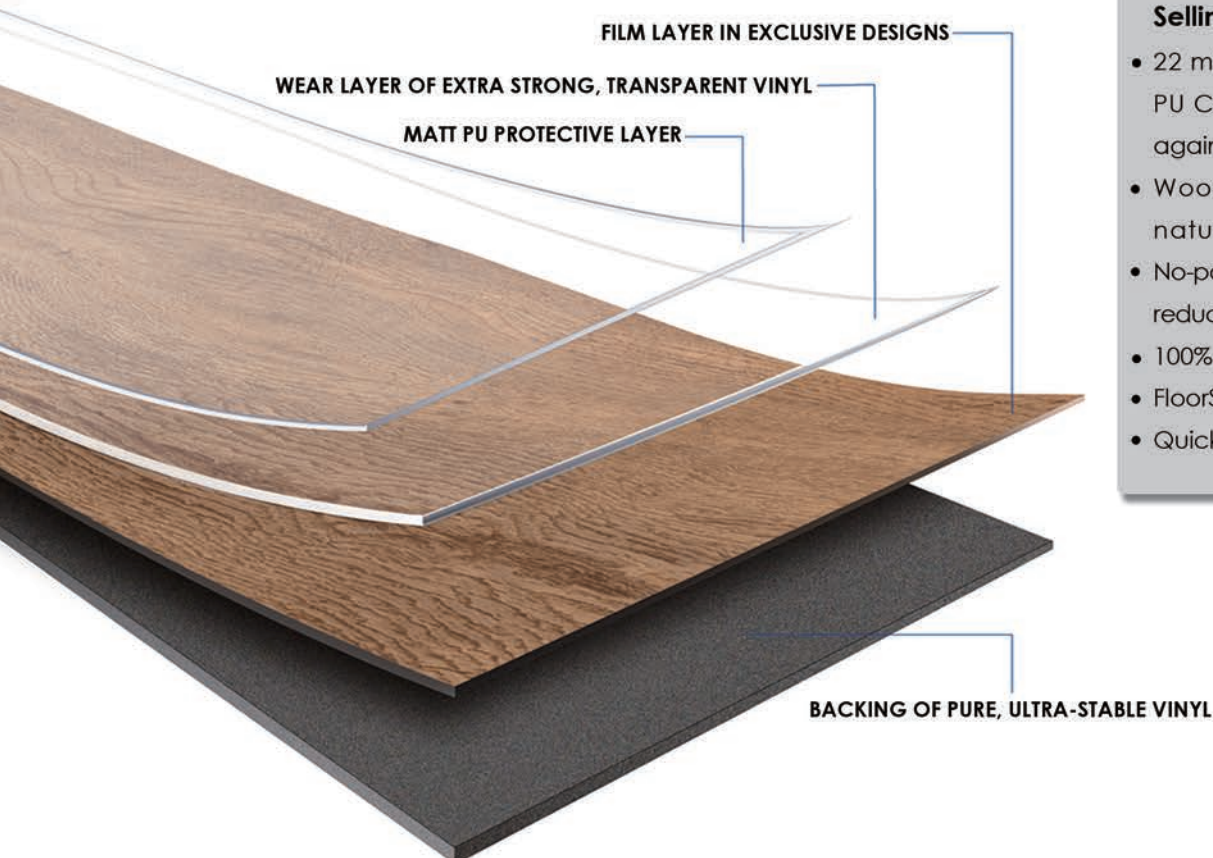

Selling Features:

- 22 mil wear layer and PU Coating protect against commercial traffic
- Wood textures emulate natural materials
- No-polish maintenance reduces occupied costs
- 100% virgin vinyl
- FloorScore Certified
- Quickship



Exotics

Luxury Vinyl Tile



Exotics W001

Exotics

Style Name	Exotics
Brand	Amercian Chic
Product Type	Luxury Vinyl Tile

DESIGN

Overall Gauge	0.10" (2.5mm)
Wear Layer	22 mil (0.55mm)
Finish	Matt Pu Protective Layer
Edge Profile	Microbevel
Size	9" × 48" (228.6mm × 1219.2mm)
Packaging	36 sf/ctn (3.34 m ² /ctn); 12 pcs/ctn; 32.7 lbs/ctn (14.82kg/ctn)
Installation	Glue Down

SUSTAINABILITY

Indoor Air Quality	FloorScore Certified
Toxicity	No Toxic, Not Contain Heavy Metal ROHS

SERVICE

Warranty	Commercial Limited 10 Year
----------	----------------------------

PERFORMANCE

Construction	Commercial Grade Luxury Vinyl Tile
Classification	ASTM F1700 - Class III Type B
Squareness	ASTM F2055 - maximum 0.010 in(0.25mm)
Size and Tolerance	ASTM F2055 - ± 0.016 in/lin. ft (0.40mm / 304.5mm)
Overall Thickness	ASTM F386 - ± 0.13mm
Flexibility	ASTM F137 - 25.4mm mandrel no crack or break
Dimensional Stability	ASTM F2199 - 0.020 in/lin. ft (0.51mm / 305 mm)maximum
Total Mass Per Unit Area	ISO 23997 - 4.29kg/m ² + 13% / - 10%
Residual Indentation	ASTM F1914 - ≤8% for average / ≤10% for individual
Slip Resistance	ASTM D2047 - Average static coefficient ≥ 0.40
Resistance to Chemicals	ASTM F925 - Class 0 excellent
Resistance to light	ASTM F1515 - ΔE< 8 ave., max
Resistance to Heat	ASTM F1514 - ΔE< 8 ave., max
Critical Radiant Flux	ASTM E648 - Not less than 0.45 watts/cm ² , Class 1
Smoke Density	ASTM E662 - 450 or less



Exotics

W002



Exotics

W011



Exotics

W009



Exotics

W005



Exotics

W015



Exotics

W014



Exotics

W016



Exotics

W004



Exotics

W013



Exotics

W010



Exotics

W007



Exotics

W006



Exotics

W003



Exotics

W008



Exotics

W012



Exotics

W017



American Chic, Inc.
2930 Inland Empire Blvd., Ste 116
Ontario, CA 91764
Phone: 909-256-4529
www.AmericanChicInc.com