

Adjustable Click Type Torque Wrenches

w.e.f: 01/07/24

STD	SQ.	RANGE		RANGE		RANGE		HEAD	HEAD	WEIGHT	OAL	PRICE
MODEL	DR.	Ibf.ft.	L.C	N. m	L.C	Kgf. m	L.C	WIDTH	DEPTH	kg	mm	Rs.
ETL-100	3/8"	2-10	0.5	3-14	0.5	0.3-1.4	0.1	30mm	32mm	0.7	330	3500.00
ETL-300	3/8"	4-25	1	5-35	1	0.5-3.5	0.1	30mm	32mm	0.8	430	3600.00
ETL-600	1/2"	8-50	2	10-68	2	1-7	0.2	30mm	40mm	1.0	485	4000.00
ETL-1200	1/2"	20-100	2	25-135	5	3-14	1	32mm	50mm	1.8	565	4400.00
ETL-2000	1/2"	35-165	5	50-225	5	5-23	1	32mm	50mm	2.5	610	4700.00
ETL-3000	1/2"	50-250	5	70-340	10	7-35	1	32mm	50mm	3.0	770	5200.00
ETL-3600	1/2"	60-300	5	80-400	10	8-40	1	32mm	55mm	3.5	800	6900.00
ETL-5000	3/4"	100-410	10	135-560	15	14-57	1	50mm	70mm	6.7	1100	10600.00
ETL-7X	3/4"	100-500	10	135-675	15	14-70	2	50mm	70mm	7.0	1100	11200.00
ETL-7200	3/4"	150-600	10	200-815	15	20-84	2	50mm	70mm	7.0	1100	12000.00
ETL-8	3/4"	150-750	20	200-1020	20	20-104	2	63mm	70mm	12.5	1230	17800.00
ETL-8S	1"	150-750	20	200-1020	20	20-104	2	63mm	85mm	13.0	1250	19000.00
ETL-9	1"	370-1110	20	500-1500	20	50-155	5	63mm	85mm	13.0	1250	21500.00
ETL-10	1"	750-1475	25	1000-2000	50	105-205	5	75mm	85mm	22.0	1340	29000.00
ETL-11	1"	1000-2200	50	1350-3000	50	135-305	5	75mm	85mm	23.0	1340	39000.00


RATCHET	SQ.	RANGE		RANGE		RANGE		HEAD	HEAD	WEIGHT	OAL	PRICE
MODEL	DR.	Ibf.ft.	L.C	N. m	L.C	Kgf. m	L.C	WIDTH	DEPTH	kg	mm	Rs.
ETL-100R	3/8"	2-10	0.5	3-14	0.5	0.3-1.4	0.1	38mm	32mm	0.8	365	3900.00
ETL-300R	3/8"	4-25	1	5-35	1	0.5-3.5	0.1	38mm	32mm	0.9	460	4100.00
ETL-600R	1/2"	8-50	2	10-68	2	1-7	0.2	48mm	40mm	1.2	535	4600.00
ETL-1200R	1/2"	20-100	2	25-135	5	3-14	1	48mm	50mm	2.1	610	5700.00
ETL-2000R	1/2"	35-165	5	50-225	5	5-23	1	48mm	50mm	2.8	660	6100.00
ETL-3000R	1/2"	50-250	5	70-340	10	7-35	1	55mm	50mm	3.2	820	6900.00
ETL-3600R	1/2"	60-300	5	80-400	10	8-40	1	55mm	50mm	3.5	820	8000.00
ETL-5000R	3/4"	100-410	10	135-560	15	14-57	1	73mm	70mm	7.5	1190	12500.00
ETL-7XR	3/4"	100-500	10	135-675	15	14-70	2	73mm	70mm	7.7	1190	13000.00
ETL-7200R	3/4"	150-600	10	200-815	15	20-84	2	73mm	70mm	7.7	1190	13700.00
ETL-8R	3/4"	150-750	20	200-1020	20	20-104	2	78mm	70mm	13.5	1320	21500.00
ETL-8R-S	1"	150-750	20	200-1020	20	20-104	2	88mm	85mm	14.5	1350	23000.00
ETL-9R	1"	370-1110	20	500-1500	20	50-155	5	88mm	85mm	14.5	1350	25000.00
ETL-10R	1"	750-1475	25	1000-2000	50	105-205	5	98mm	85mm	23.0	1455	32000.00
ETL-11R	1"	1000-2200	50	1350-3000	50	135-305	5	98mm	85mm	24.0	1505	44000.00

Applications:

ETL-100 / 300	Scientific Instruments & Meters, Assembly and manufacturing processes of Non - Ferrous Metals.
ETL- 600	2 / 3 Wheeler Engines, Compressors, Machinery and Manufacturing Processes.
ETL- 1200	Light & Medium Vehicle Engines and chassis, Marine Engines and Machine Tools.
ETL- 2000	Medium & Heavy Vehicle Engines, Tractor Engines, Marine Auxiliary and Industrial Machinery.
ETL- 3000	Heavy Motor Vehicle, Marine and Diesel Engines, Earth Moving Equipments, Machine Tools.
ETL- 5000 / 7X / 7200	Heavy Machinery, Equipments & Transmissions, Locomotives, Steam and Hydraulic Equipments.
ETL- 8 / 9 / 10 / 11	Generating Equipments, Heavy Static Marine and Diesel Engines.



TORQUE WRENCHES

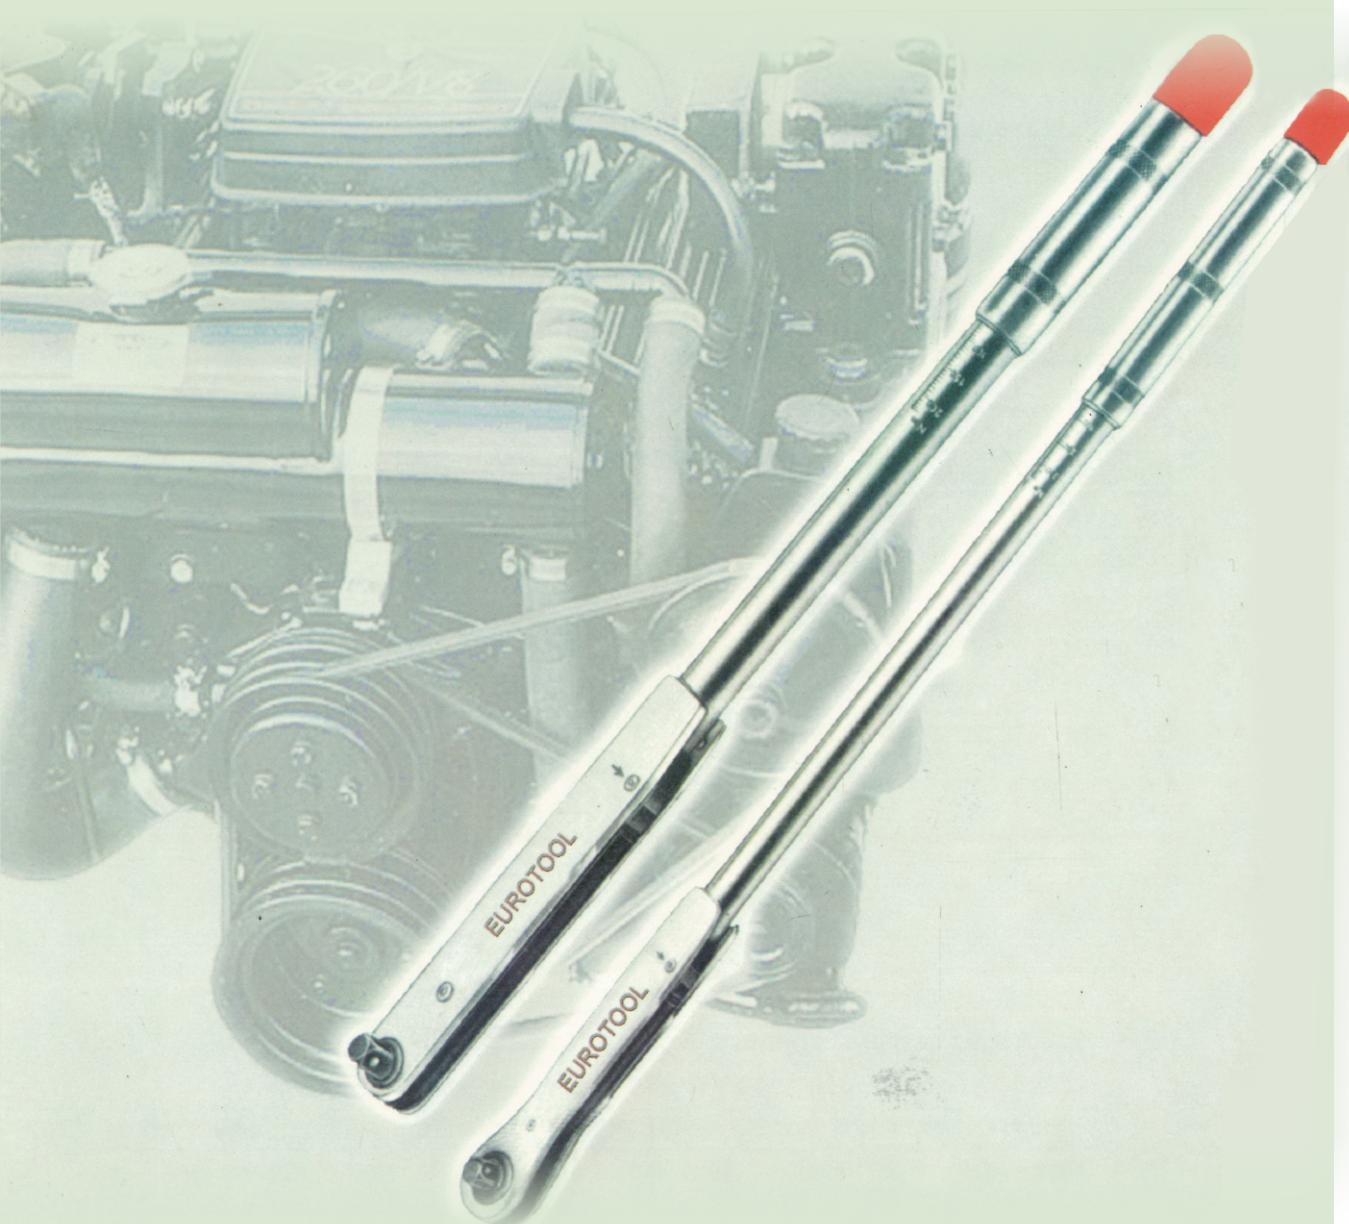

- ★ Guaranteed Calibration Tolerance of $\pm 3\%$ across the whole range.
- ★ **TriSense** safety signal of TOUCH SIGHT and SOUND indicate the required torque setting achieved.
- ★ All the working parts made from special alloy steel & heat treated for wear resistance.
- ★ Ratcheting models to speed up operation. The ratchet ensures ease of use in confined spaces with minimal movements.
- ★ Compact head design for maximum accessibility.