

EM-150HG

15" TFT LCD Industrial Touch Display



Features:

- ▣ 15" Color active matrix LCD Module
- ▣ XGA 1024X768 Native mode
- ▣ Wall mount Vesa screw holes 75x75mm
- ▣ Build 5wire Resistive Touch screen
- ▣ Metal Steady stand bracket
- ▣ Project Capacitive Multi-Touch Screen options
- ▣ VGA+DVI+HDMI Input Options
- ▣ Customized By User's Reques

Specifications

Part Number	EM-150	
Display Specifications	LCD Display	15" Color active matrix LCD Module
	Pixels H x V	XGA (1024 X 768) (native mode)
	Active Area	304.1 (H) x 228.1 (V) (15" diagonal)
	Support Color	262K(6-bit) / 16.2M(8-bit) colors
	Pixel Pitch	0.297 (H) x 0.297 (V) mm
	Luminance	300 cd/m ² LED Backlight
	Contrast Ratio	2500 : 1 (Typical)
	Scan frequency	Horizontal: 30 to80 KHz / Vertical : 50 to 75 Hz
	Viewing Angle	176°/176° (H/V)
	Response Time	7/14 ms (tf/tr)
	Input Signal	R/G/B Analog
	Signal type	15 Pin D-sub VGA only
	Plug & Play	DDC 2B
	OSD Controls/Button	Power, Auto, Menu / Enter, Up, Down
	Power Consumption	30W(Max.) /Standby under 4W
	Power Management	VESA DPMS
	Power Supply	Input : DC 12V/3.0A
	Signal Options	VGA+HDMI+DVI Input
	Touch Screen Options	Project Capacitive / 5W Resistive Antiglare
Mechanical Specifications	Construction	Metal & Varnish
	Color Options	Black
	Dimensions(WXHXD)	355X 295 X 55 (mm)
	Mounting Options	Wall Mount ,Table Mount
	Weight	5.0 KG (Not With Stand Bracket)
Environmental Specifications	Operating Temperature	0°C~60°C
	Storage Temp.	-20°C~65°C
	Relative Humidity	Less than 85%
	RoHS Compliance	RoHS Compliance

EM-150HG


Ordering Information:

Part No.	Description
EM-150BU	15" /VGA /5-wire resistive /USB /Black
EM-150BR	15" /VGA /5-wire resistive /RS-232 /Black
EM-150BPU	15" /VGA /Project Capacitive/USB /Black
EM-150BPR	15" /VGA / Project Capacitive /RS-232 /Black

Accessory Ordering Information:

Part No.	Description
CLSMG02	VGA Cable 3M
CLCOM01	RS-232 Cable 3M
HG001T	Stand kits for RA-series
WM005	Wall mount kit for RA series

Dimensions:

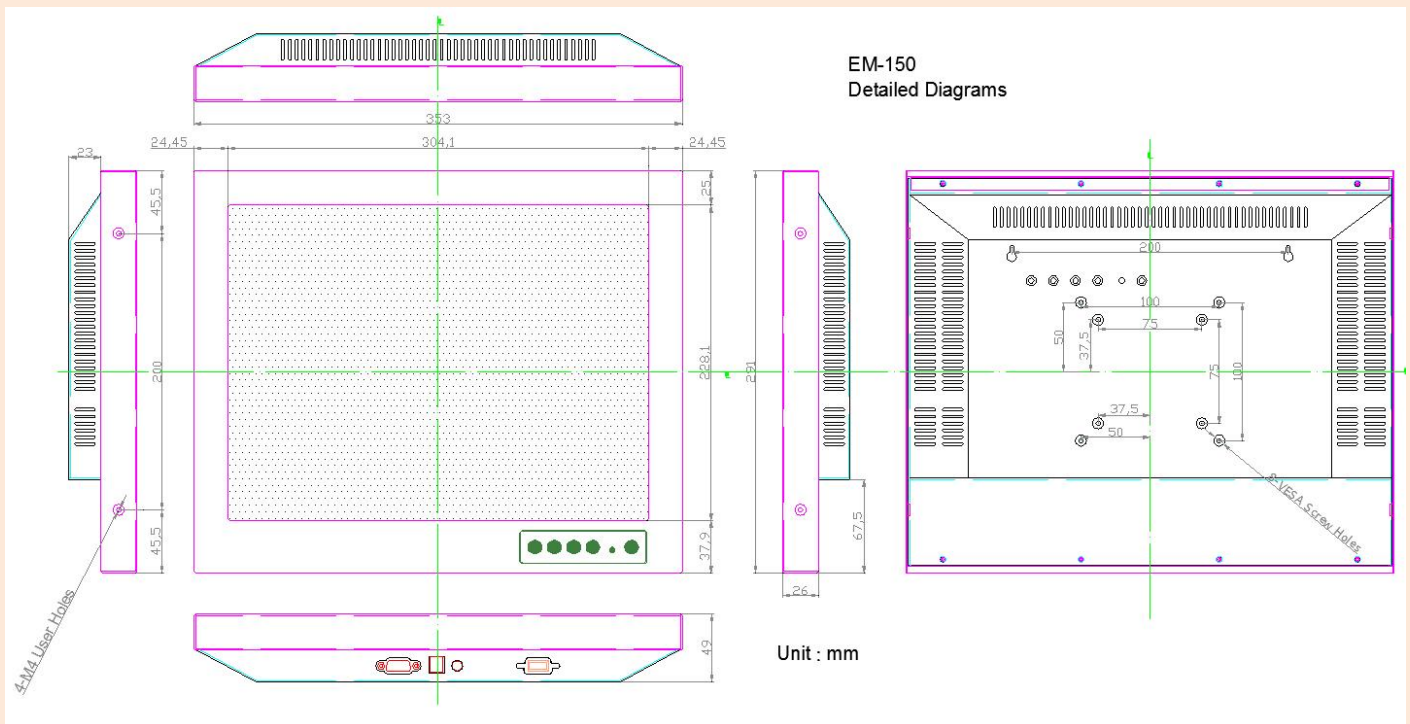

I/O Appearance:

