
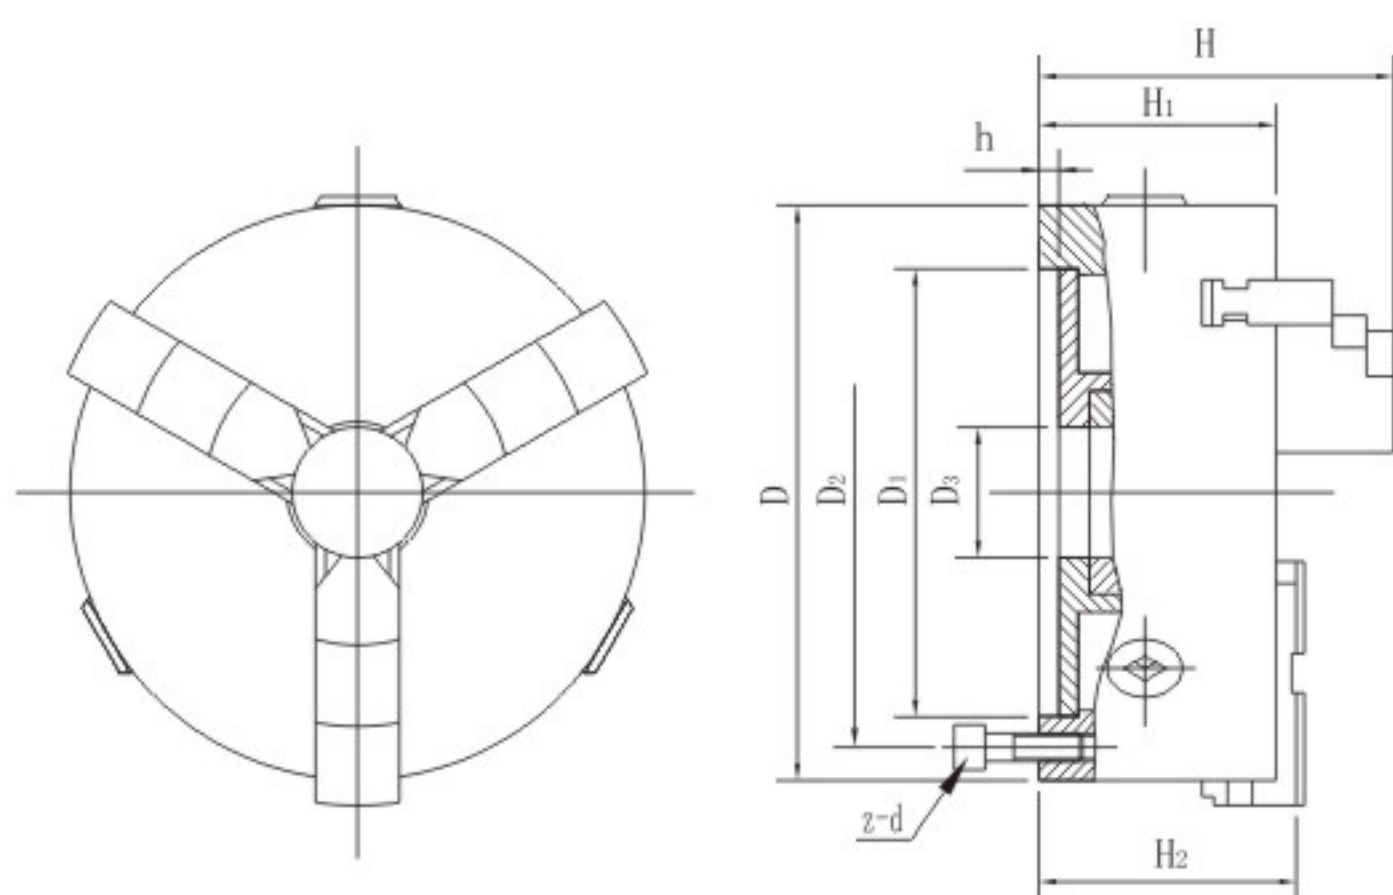


K11 SERIES THREE-JAW

SELF-CENTRING CHUCK

K11系列三爪自定心卡盘

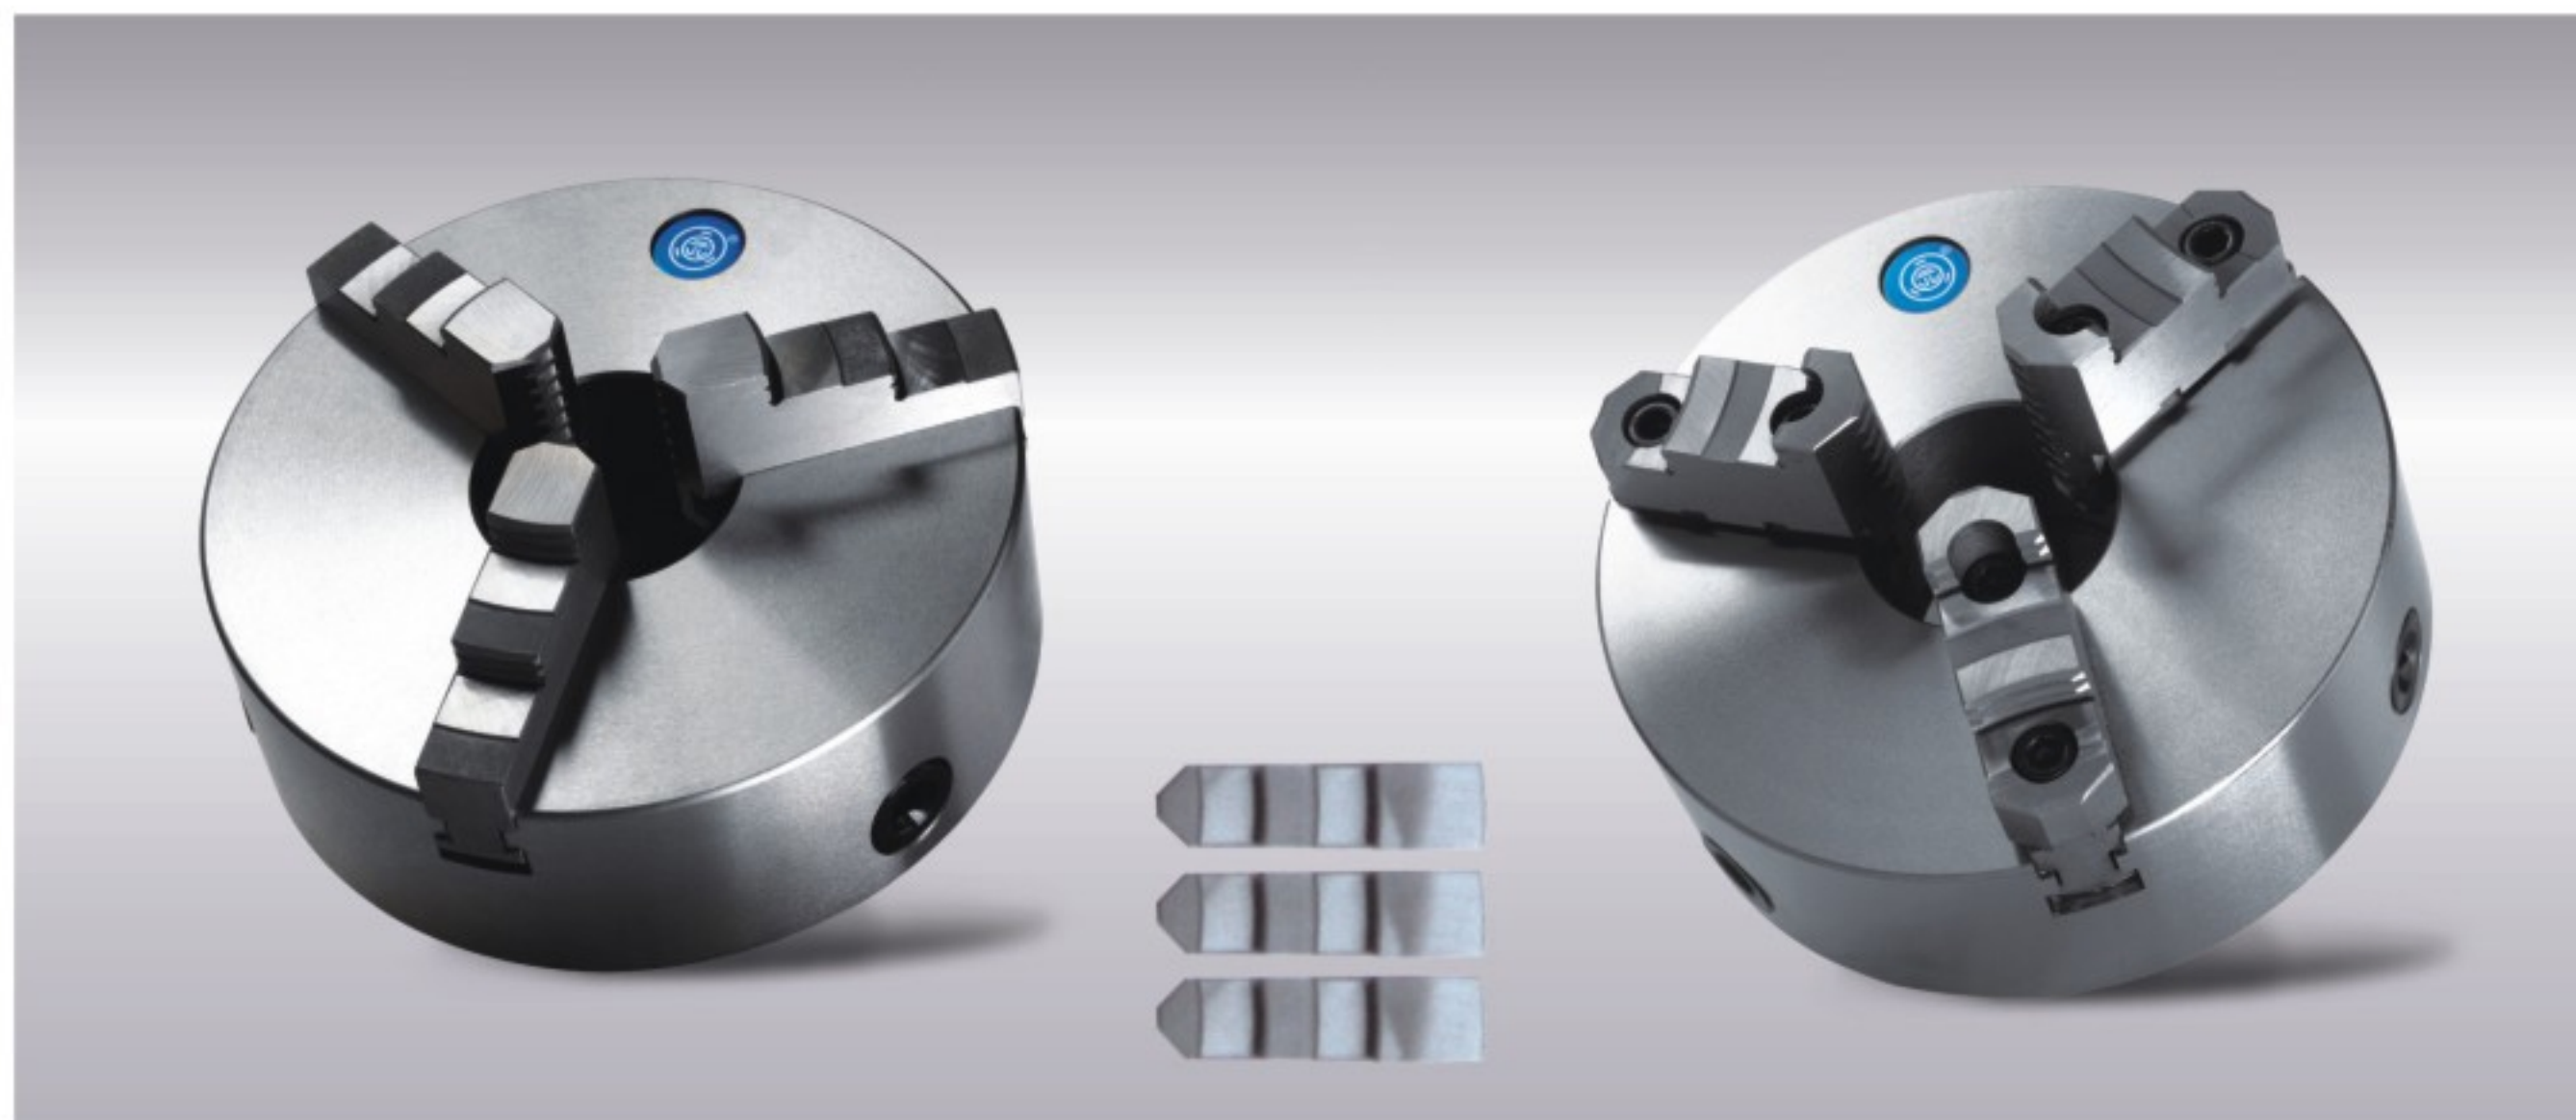

说明 Explain

K11型三爪自定心卡盘为K11、K11A二种型号。K11型配带正爪和反爪各一副，可分别使用，K11A型配带符合ISO3442标准的分离爪。并可根据用户提供软卡爪，经随机配车(磨)后可获得较高定心精度，满足夹持要求。

K11 series Three-jaw Self-centring chuck is subdivided into two types,K11,K11A.Type K11 provides two sets of jaws in different directions which can be used respectively.Type K11A provides ISO3442 standard jaws.Soft jaws are to be provided on request Higher centring accuracy can be achieved after being rubbed on the machine,so as to satisfy the need for holding.

规格表 Specifications

规格/型式 SEPC. /MODEL	D1	D2	D3	H	H1	H2	h	z-d
K1180	55	66	16	66	50	-	3.5	3-M6
K11100	72	84	22	74.5	55	-	3.5	3-M8
K11125	95	108	30	85	58	-	4	3-M8
K11130	100	115	30	85	58	-	4	3-M8
K11160	130	142	40	95	65	-	5	3-M8
K11160A	130	142	40	109	65	71	5	3-M8
K11165	130	145	40	95	65	-	5	3-M8
K11165A	130	145	40	109	65	71	5	3-M8
K11190	155	172	55	109	75	-	5	3-M10
K11190A	155	172	55	122	75	80	5	3-M10
K11200	165	180	65	109	75	-	5	3-M10
K11200A	165	180	65	122	75	80	5	3-M10
K11240	195	215	70	120	80	-	8	3-M12
K11240A	195	215	70	133	80	85	8	3-M12
K11250	206	226	80	120	80	-	5	3-M12
K11250A	206	226	80	133	80	85	5	3-M12
K11315	260	285	100	142.5	90	-	6	3-M16
K11315A	260	285	100	155.5	90	96.5	6	3-M16
K11320	270	290	100	142.5	90	-	6	3-M16
K11320A	270	290	100	155.5	90	96.5	6	3-M16
K11325	272	296	100	142.5	90	-	6	3-M16
K11325A	272	296	100	155.5	90	96.5	6	3-M16
K11380	325	350	130	155.5	100	-	6	3-M16
K11380A	325	350	130	170.5	100	96.5	6	3-M16
K11400	340	368	130	155.5	100	-	6	3-M16
K11400A	340	368	130	170.5	100	108.5	6	3-M16
K11500	440	465	200	176	115	-	6	6-M16
K11500A	440	465	200	203	115	123	6	6-M16
K11630	560	595	260	192	130	-	7	6-M16
K11630A	560	595	260	218	130	138	7	6-M16
K11800A	710	760	385	249	148	158	8	6-M20
K111000A	910	950	460	266	165	-	8	6-M24
K111250A	910	950	500	281	180	-	10	6-M24