




Codo de 45°, extremos Clamp

Tri - Clamp 45° Elbow - JB 2KMP

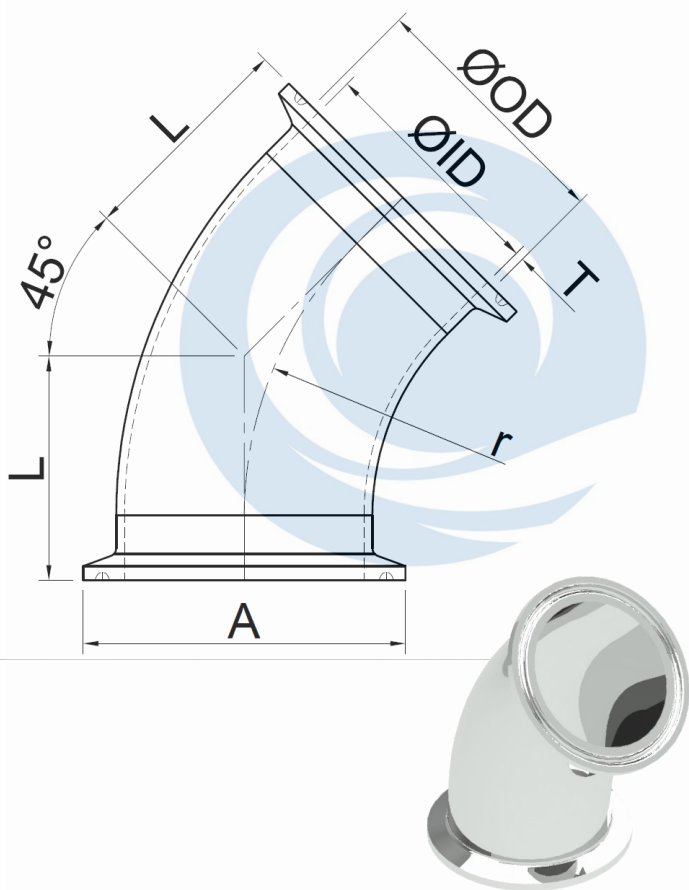

Tri - Clamp 45° Elbow - JB 2KMP

SIZE	ØOD	ØID	L	r	A	T	# Part. Ac. Inox. 304/316L
1/2"	0.500" 12.7 mm	0.370" 9.4 mm	0.966" 24.54 mm	0.750" 19.05 mm	0.984" 25.0 mm	0.065" 1.65 mm	JB 2KMP 304 15 JB 2KMP 316L 15
3/4"	0.750" 19.05 mm	0.620" 15.75 mm	0.966" 24.54 mm	1.125" 28.58 mm	0.984" 25.0 mm	0.065" 1.65 mm	JB 2KMP 304 20 JB 2KMP 316L 20
1"	1.000" 25.4 mm	0.870" 22.1 mm	1.125" 28.58 mm	1.500" 38.1 mm	1.984" 50.39 mm	0.065" 1.65 mm	JB 2KMP 304 25 JB 2KMP 316L 25
1-1/2"	1.500" 38.1 mm	1.370" 34.8 mm	1.437" 36.5 mm	2.250" 57.15 mm	1.984" 50.39 mm	0.065" 1.65 mm	JB 2KMP 304 40 JB 2KMP 316L 40
2"	2.000" 50.8 mm	1.870" 47.5 mm	1.750" 44.45 mm	3.000" 76.2 mm	2.516" 63.91mm	0.065" 1.65 mm	JB 2KMP 304 50 JB 2KMP 316L 50
2-1/2"	2.500" 63.5 mm	2.370" 60.2 mm	2.062" 66.55 mm	3.750" 95.25 mm	3.047" 77.39 mm	0.065" 1.65 mm	JB 2KMP 304 65 JB 2KMP 316L 65
3"	3.000" 76.2 mm	2.870" 72.9 mm	2.375" 60.33 mm	4.500" 114.3 mm	3.579" 90.91mm	0.065" 1.65 mm	JB 2KMP 304 80 JB 2KMP 316L 80
4"	4.000" 101.6 mm	3.834" 97.38 mm	3.125" 79.38 mm	6.000" 152.4 mm	4.682" 118.92mm	0.083" 2.11 mm	JB 2KMP 304 100 JB 2KMP 316L 100
6"	6.000" 152.4 mm	5.782" 146.86mm	4.625" 117.48mm	9.000" 228.6mm	6.570" 166.88mm	0.109" 2.77 mm	JB 2KMP 304 150 JB 2KMP 316L 150

