



Férula Clamp BPE, extremos AWF x Férula Clamp

Table DT-4.1.4-1 Automatic Tube Weld: Ferrule

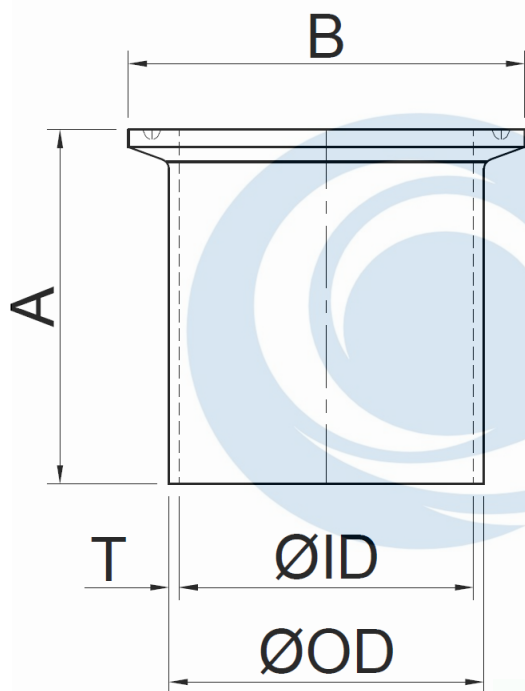


Table DT-4.1.4-1 Automatic Tube Weld: Ferrule						
SIZE	ØOD	ØID	A	B	T	# Part. Ac. Inox. 316L
1/2"	0.500" 12.7 mm	0.370" 9.4 mm	1.750" 44.45 mm	0.984" 25.0 mm	0.065" 1.65 mm	JB 14AMP BPE 316L 15
3/4"	0.750" 19.05 mm	0.620" 15.75 mm	1.750" 44.45 mm	0.984" 25.0 mm	0.065" 1.65 mm	JB 14AMP BPE 316L 20
1"	1.000" 25.4 mm	0.870" 22.1 mm	1.750" 44.45 mm	1.984" 50.39 mm	0.065" 1.65 mm	JB 14AMP BPE 316L 25
1-1/2"	1.500" 38.1 mm	1.370" 34.8 mm	1.750" 44.45 mm	1.984" 50.39 mm	0.065" 1.65 mm	JB 14AMP BPE 316L 40
2"	2.000" 50.8 mm	1.870" 47.5 mm	2.250" 57.15 mm	2.516" 63.91mm	0.065" 1.65 mm	JB 14AMP BPE 316L 50
2-1/2"	2.500" 63.5 mm	2.370" 60.2 mm	2.250" 57.15 mm	3.047" 77.39 mm	0.065" 1.65 mm	JB 14AMP BPE 316L 65
3"	3.000" 76.2 mm	2.870" 72.9 mm	2.250" 57.15 mm	3.579" 90.91mm	0.065" 1.65 mm	JB 14AMP BPE 316L 80
4"	4.000" 101.6 mm	3.834" 97.38 mm	2.250" 57.15 mm	4.682" 118.92mm	0.083" 2.11 mm	JB 14AMP BPE 316L 100
6"	6.000" 152.4 mm	5.782" 146.86mm	3.000" 76.2 mm	6.570" 166.88mm	0.109" 2.77 mm	JB 14AMP BPE 316L 150

