



Reducción Excéntrica BPE, extremos Ferulados Clamp

Table DT-4.1.3-3 Hygienic Clamp Joint: Eccentric Reducer

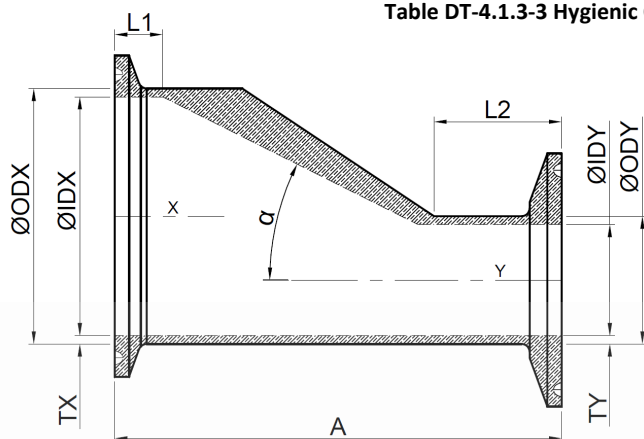


Table DT-4.1.3-3 Hygienic Clamp Joint: Eccentric Reducer

SIZE		ØODX	ØIDX	TX	A	L1	L2	α	ØODY	ØIDY	TY	# Part. Ac. Inox. 316L
X	Y											
3/4"	1/2"	0.750" 19.05 mm	0.620" 15.75 mm	0.065" 1.65 mm	3.125" 79.38 mm	0.375" 9.53 mm	1.125" 28.58 mm	30	0.500" 12.7 mm	0.370" 9.4 mm	0.065" 1.65 mm	JB 3214MP 316L 2015
1"	1/2"	1.000" 25.4 mm	0.870" 22.1 mm	0.065" 1.65 mm	3.500" 88.90 mm	0.375" 9.53 mm	1.125" 28.58 mm	30	0.500" 12.7 mm	0.370" 9.4 mm	0.065" 1.65 mm	JB 3214MP 316L 2515
1"	3/4"	1.000" 25.4 mm	0.870" 22.1 mm	0.065" 1.65 mm	3.125" 79.38 mm	0.375" 9.53 mm	1.125" 28.58 mm	30	0.750" 19.05 mm	0.620" 15.75 mm	0.065" 1.65 mm	JB 3214MP 316L 2520
1-1/2"	3/4"	1.500" 38.1 mm	1.370" 34.8 mm	0.065" 1.65 mm	4.000" 101.6 mm	0.375" 9.53 mm	1.125" 28.58 mm	30	0.750" 19.05 mm	0.620" 15.75 mm	0.065" 1.65 mm	JB 3214MP 316L 4020
1-1/2"	1"	1.500" 38.1 mm	1.370" 34.8 mm	0.065" 1.65 mm	3.500" 88.90 mm	0.375" 9.53 mm	1.125" 28.58 mm	30	1.000" 25.4 mm	0.870" 22.1 mm	0.065" 1.65 mm	JB 3214MP 316L 4025
2"	1"	2.000" 50.8 mm	1.870" 47.5 mm	0.065" 1.65 mm	4.375" 111.13 mm	0.375" 9.53 mm	1.125" 28.58 mm	30	1.000" 25.4 mm	0.870" 22.1 mm	0.065" 1.65 mm	JB 3214MP 316L 5025
2"	1-1/2"	2.000" 50.8 mm	1.870" 47.5 mm	0.065" 1.65 mm	3.500" 88.90 mm	0.375" 9.53 mm	1.125" 28.58 mm	30	1.500" 38.1 mm	1.370" 34.8 mm	0.065" 1.65 mm	JB 3214MP 316L 5040
2-1/2"	1-1/2"	2.500" 63.5 mm	2.370" 60.2 mm	0.065" 1.65 mm	4.375" 111.13 mm	0.375" 9.53 mm	1.125" 28.58 mm	30	1.500" 38.1 mm	1.370" 34.8 mm	0.065" 1.65 mm	JB 3214MP 316L 6540
2-1/2"	2"	2.500" 63.5 mm	2.370" 60.2 mm	0.065" 1.65 mm	3.500" 88.90 mm	0.375" 9.53 mm	1.125" 28.58 mm	30	2.000" 50.8 mm	1.870" 47.5 mm	0.065" 1.65 mm	JB 3214MP 316L 6550
3"	1-1/2"	3.000" 76.2 mm	2.870" 72.9 mm	0.065" 1.65 mm	5.250" 133.35 mm	0.375" 9.53 mm	1.125" 28.58 mm	30	1.500" 38.1 mm	1.370" 34.8 mm	0.065" 1.65 mm	JB 3214MP 316L 8040
3"	2"	3.000" 76.2 mm	2.870" 72.9 mm	0.065" 1.65 mm	4.375" 111.13 mm	0.375" 9.53 mm	1.125" 28.58 mm	30	2.000" 50.8 mm	1.870" 47.5 mm	0.065" 1.65 mm	JB 3214MP 316L 8050
3"	2-1/2"	3.000" 76.2 mm	2.870" 72.9 mm	0.065" 1.65 mm	5.250" 133.35 mm	0.375" 9.53 mm	1.125" 28.58 mm	30	2.500" 63.5 mm	2.370" 60.2 mm	0.065" 1.65 mm	JB 3214MP 316L 8065
4"	2"	4.000" 101.6 mm	3.834" 97.38 mm	0.083" 2.11 mm	6.250" 158.75 mm	0.375" 9.53 mm	1.125" 28.58 mm	30	2.000" 50.8 mm	1.870" 47.5 mm	0.065" 1.65 mm	JB 3214MP 316L 10050
4"	2-1/2"	4.000" 101.6 mm	3.834" 97.38 mm	0.083" 2.11 mm	5.375" 136.53 mm	0.375" 9.53 mm	1.125" 28.58 mm	30	2.500" 63.5 mm	2.370" 60.2 mm	0.065" 1.65 mm	JB 3214MP 316L 10065
4"	3"	4.000" 101.6 mm	3.834" 97.38 mm	0.083" 2.11 mm	5.000" 127.0 mm	0.375" 9.53 mm	1.625" 41.28 mm	30	3.000" 76.2 mm	2.870" 72.9 mm	0.065" 1.65 mm	JB 3214MP 316L 10080
6"	3"	6.000" 152.4 mm	5.782" 146.86 mm	0.109" 2.77 mm	8.500" 215.90 mm	0.375" 9.53 mm	1.625" 41.28 mm	44	3.000" 76.2 mm	2.870" 72.9 mm	0.065" 1.65 mm	JB 3214MP 316L 15080
6"	4"	6.000" 152.4 mm	5.782" 146.86 mm	0.109" 2.77 mm	7.000" 177.80 mm	0.375" 9.53 mm	1.625" 41.28 mm	44	4.000" 101.6 mm	3.834" 97.38 mm	0.083" 2.11 mm	JB 3214MP 316L 150100

