


KVC

High performance Box fan (metal)


- The energy saving, versatile and cost-efficient fan
- High quality metal housing with corrosion resistant powder coating
- Reliable, established and proven design
- For mounting, we recommend using cushioned clamps to reduce noise transmission into the ducting system
- Voltage-controlled air flow rate adjustment
- Built-in thermostatic switch with automatic reset
- Maintenance-free and quiet in operation
- Backward curved impellers for optimum efficiency rates
- Variable horizontal or vertical mounting position
- Insulation Class Motor: F
- IP Complete Unit: IP44




		U_N	f_N	$I_{max.}$	P_N	V	N	Insulation	Protection	T	Noise
	Model	V	Hz	A	W	cfm / m ³ /h	rpm	class	class	°C	(dB)
A	KVC 100	220-240V ~	50	0,3	68	161 / 275	2500	F	IP44	60	65
B	KVC 125	220-240V ~	50	0,3	75	229 / 390	2500	F	IP44	60	66
C	KVC 150	220-240V ~	50	0,4	89	400 / 680	2500	F	IP44	60	72
D	KVC 160	220-240V ~	50	0,3	85	464 / 790	2500	F	IP44	60	72
E	KVC 200	220-240V ~	50	0,5	127	558 / 950	2500	F	IP44	60	70
F	KVC 250	220-240V ~	50	0,7	168	647 / 1100	2500	F	IP44	60	70
G	KVC 315	220-240V ~	50	0,3	69	941 / 1600	2500	F	IP44	60	75
H	KVC 355	220-240V ~	50	0,4	94	1176 / 2000	1420	F	IP44	60	59
I	KVC 400	220-240V ~	50	0,5	100	2058 / 3500	1580	F	IP44	60	60

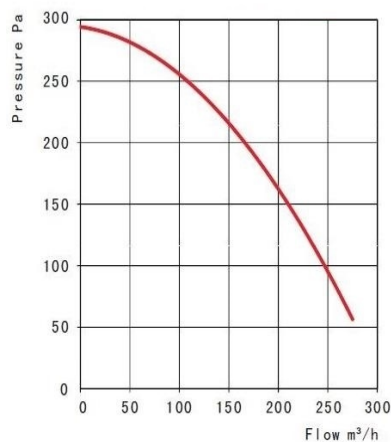


KVC 100

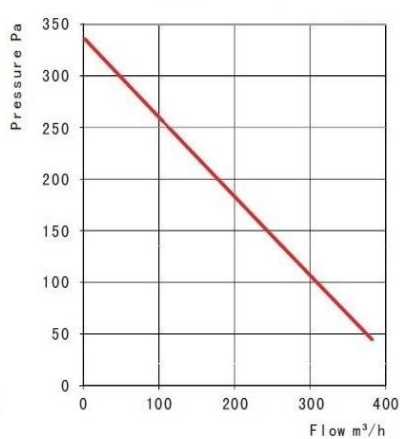


KVC 125

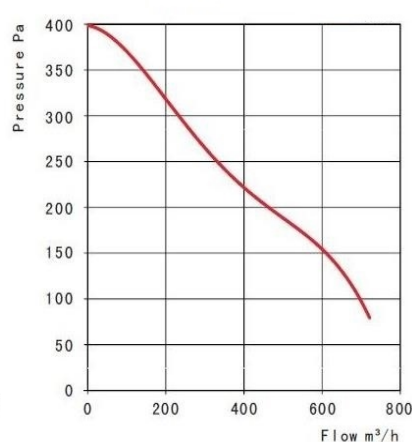


KVC 150

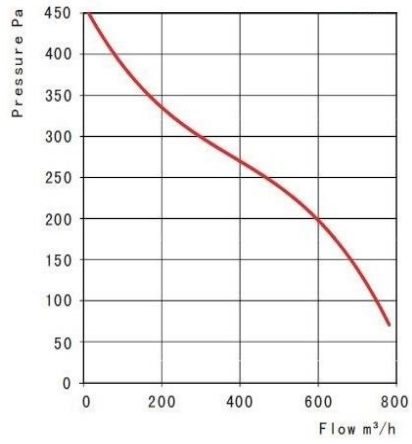


KVC 160

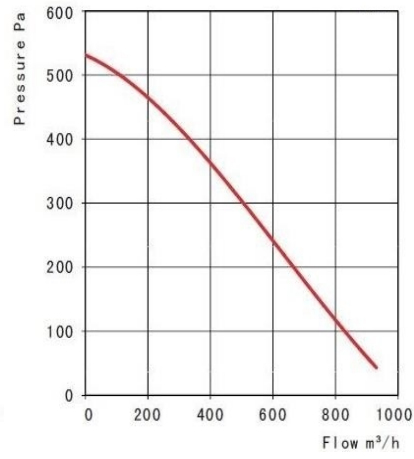


KVC 200

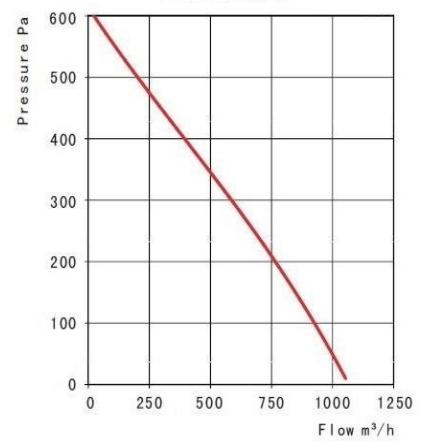


KVC 250

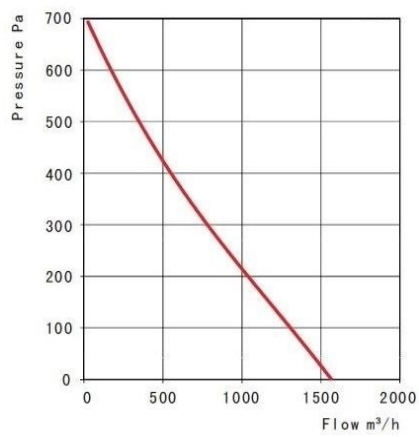

KVC 315

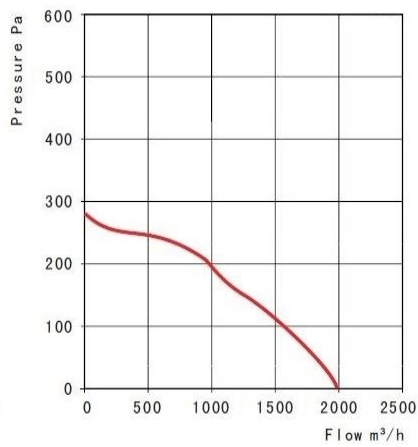

KVC 355

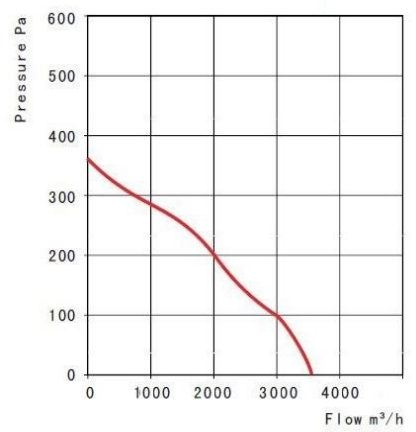

KVC 400