



BS 135

BRONZE BALL VALVE

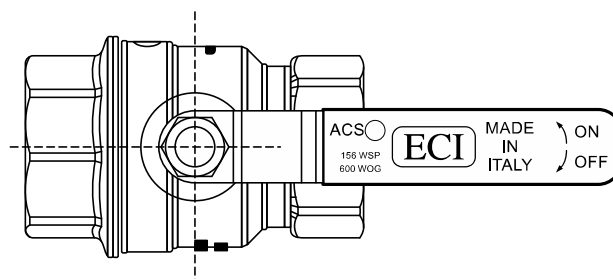

www.ecivalve.it

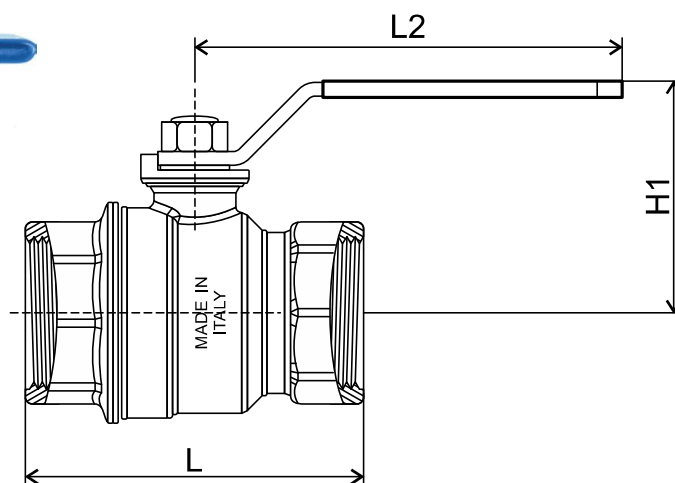

Specifications:

- FULL BORE SIZES 1/2" TO 2"
- STANDARD PASSAGE SIZES 2.1/2" UP TO 4"
- WP: 35 BAR SIZES 1/2" & 3/4" 28 BAR SIZES 1" UP TO 4"
- WORKING TEMPERATURE: $T \leq 140^{\circ}\text{C}$
- SUITABLE FOR WATER, GLYCOLATE SOLUTION (GLYCOL 50%)
- THREADED ACCORDING TO ISO 228/1
- SHELL TEST ACCORDING TO UNI EN 13828

Dimensions (mm)

DN	SIZE INCH	L	H1	L2	Weight(KGS)
15	1/2"	53	35	77	0.177
20	3/4"	60	47	95	0.274
25	1"	74	51	95	0.407
32	1 1/4"	84	56	95	0.565
40	1 1/2"	95	69	137	0.984
50	2"	109	77	137	1.539
65	2 1/2"	146	102	173	2.980
80	3"	160	109	173	4.172
100	4"	207	200	187	7.004

Materials

DESCRIPTION	MATERIAL
Body	Brass chrome plated EN 12540
Tailpiece	Brass chrome plated EN 12540
Ball	Brass chrome plated EN 12540
Stem	Brass EN 12164-CW614N
Ball Seat	PTFE
Packing	PTFE
Handle	Galvanized steel
Handle Sleeve	Vinyl
Handle Nut	Galvanized steel



All data, descriptions and pictures contained in this leaflet may be subject to change without prior notice.
European Casting Industry Srl | Via Lazzaretto, 11 | 20124 Milan MI, Italia | P.Iva: 03228761205 | www.ecivalve.it | info@ecivalve.it