


**Range:** Washbasin single self-closing tap

**Ref:** 64703 - PRESTO NEO DUO deck-mounted - Single timed-flow - 1.9L/min (PRESTOGREEN)

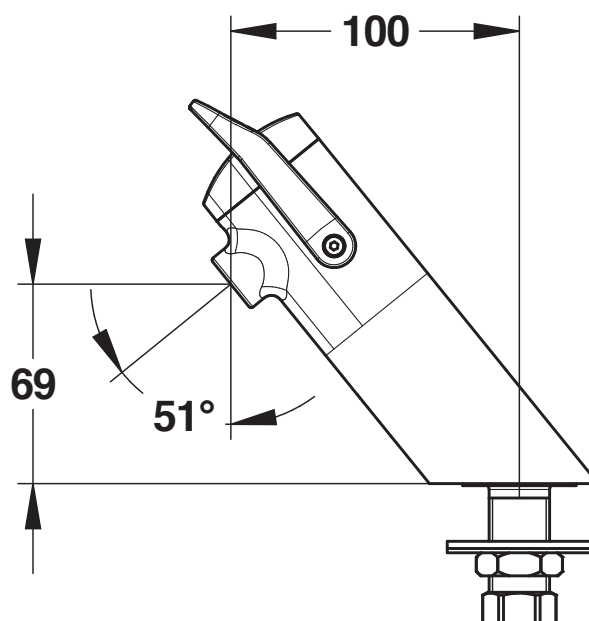

#### > Working pressure:

- 1 to 5 bar

#### > Flow:

- 1.9L/mn with flow regulator
- Anti water-hammer system

#### > Flow time:

- 15 seconds (from 8 to 20 seconds) - lever upwards or downwards

#### > Hydraulic supply:

- G 1/2" x 40

#### > Thermal resistance:

- This tap can withstand a thermal shock of 75°C for 30 minutes as part of a thermal shock programme

#### > Convenience:

- Soft-touch
- Two-coloured ergonomic lever, in glass fiber reinforced polymer

#### > Delivered with:

- 1 Filter gasket
- 1 base gasket
- 1 fixture nut + 1 stainless steel washer
- 1 Nut for 12x14 tube
- 1 rubber flat gasket
- 1 coloured sticker

#### > Standards / Approvals:

- Chrome-plated brass body compliant with standards NF EN1982 / NF EN12164 / NF EN12165
- Nickel-Chrome surface treatment compliant with NF EN12540
- Neutral Salt Spray (NSS) resistant: 200 h according to NF ISO 9227
- NF compliant (in progress)

